INCH-POUND

MIL-PRF-15160/6E
w/AMENDMENT 1
4 September 2015
SUPERSEDING
MIL-PRF-15160/6E
12 October 2011


PERFORMANCE SPECIFICATION SHEET

FUSES; INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F06

INACTIVE FOR NEW DESIGN
AFTER 30 JANUARY 1970

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-15160.

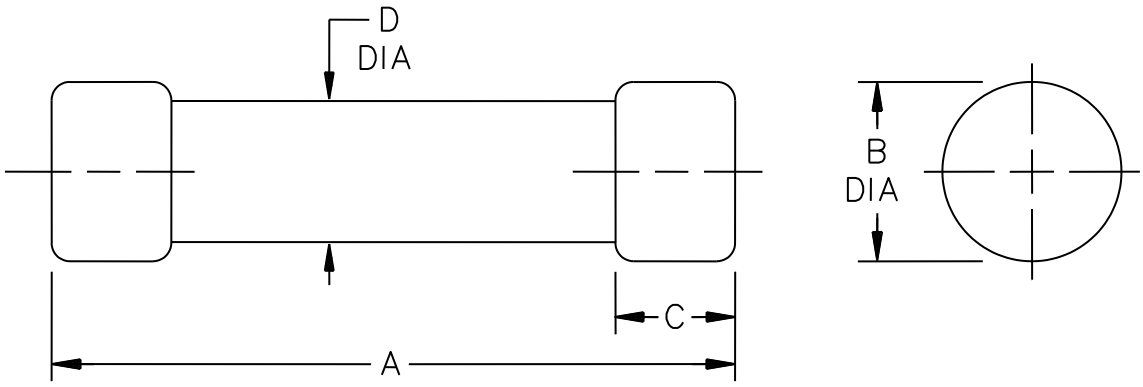

Ltr	Inches		mm	
	Min	Max	Min	Max
A	1.219	1.281	30.96	32.54
B	.277	.285	7.24	7.36
C	.340	---	8.64	---
D	---	.256	---	6.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F06 fuse.

AMSC N/A

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Case: Plastic or ceramic tube

Ferrule: Brass, copper, or copper alloy.

Finish: Nickel, bright alloy plate, or silver when specified.

Terminal strength: Method 211 of MIL-STD-202, test condition E, 2 inch-pound torque between ferrules and fuse body.

Electrical:

Current rating: See table I.

Voltage rating: See table I.

Characteristic: See table I.

Overload interrupt: Maximum 1 hour at 135 percent of rated current.

Short circuit interrupt: Minimum or 10,000 amperes at rated voltage dc.

Type designation: Type designation shall be as specified in table I.

TABLE I. Type designation. 1/

Style	Characteristic	Voltage	Current
F06	A	250 V	1 A
F06	A	250 V	2 A
F06	A	250 V	3 A
F06	A	250 V	5 A
F06	A	250 V	10 A
F06	A	250 V	15 A

1/ For silver plated terminals, the designator “S” is added after the current rating.

VERIFICATION:

Qualification inspection: First article in accordance with table III of MIL-PRF-15160 for 1, 2, and 3 ampere current ratings only.

Conformance inspection: Group A and B inspections of MIL-PRF-15160 for 1, 2, and 3 ampere current ratings only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

Cross reference. For applicable cross reference, see table II. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

TABLE II. Cross reference.

Superseding number	Superseded numbers					
	81349	96906	71400	75915	75915	98997
F06A250V1A 1/	F06G1R00A 1/	MS90082-1 2/	ABS1	494001	414001	4AB1
F06A250V2A	R06G2R00A	MS90082-2	ABS2	494002	414002	4AB2
F06A250V3A	R06G3R00A	MS90082-3	ABS3	494003	414003	4AB3
F06A250V5A	R06G5R00A	MS90082-4	ABS5	494005	414005	4AB5
F06A250V10A	F06G10R00A	MS90082-5	ABS10	494010	414010	4AB10
F06A250V15A	F06G15R00A	MS90082-6	ABS15	494015	414015	4AB15

1/ A letter S following the part number signifies silver plating.
2/ A second dash number (-1) signifies silver plating.

Referenced documents. In addition to MIL-PRF-15160, this document references the following:

MIL-STD-202

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5920-2015-036)

Review activities:
Army - AT, CR4, MI
Navy - AS, CG, EC, MC
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.