INCH/POUND

A-A-1354A
February 6, 2002
SUPERSEDING
A-A-1354
January 14, 1980

# COMMERCIAL ITEM DESCRIPTION

## WRENCH, OPEN END, SINGLE THIN HEAD, 15° HEAD


The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers wrenches suitable for thin hexagon and square-headed bolts and nuts.

2. CLASSIFICATION. Not applicable

3. SALIENT CHARACTERISTICS.

3.1 Design. Wrenches shall be designed as to afford a well proportioned, comfortable handgrip. Wrench dimensions and sizes shall conform to section 3.2.

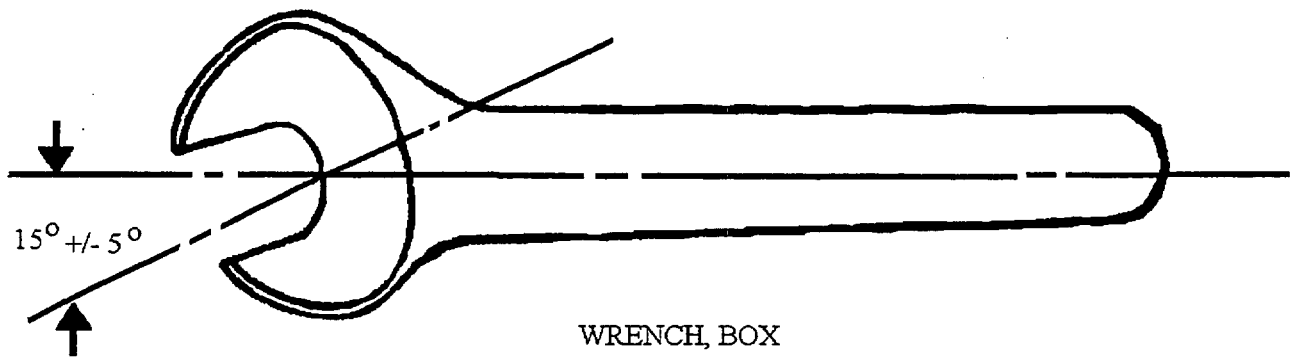


WRENCH, BOX

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore (6FEE), 1500 Bannister Rd. Bldg. #6, Kansas City, Missouri. 64131.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

3.2 Dimensions and Sizes.

| Wrench Opening (Distance Across Flats) Inches | Width Of Head (Maximum) Inches | Thickness Of Head (Maximum) Inches | Overall Length (Minimum) Inches | Test Load (Minimum) Inches |
|---|---|---|---|---|
| 7/16 | 1-3/16 | 11/64 | 3-7/8 | 320 |
| 1/2 | 1-3/16 | 11/64 | 3-7/8 | 320 |
| 3/16 | 1-3/8 | 3/16 | 4-7/16 | 475 |
| 5/8 | 1-9/16 | 13/64 | 5-1/16 | 650 |
| 11/16 | 1-9/16 | 13/64 | 5-1/16 | 650 |
| 3/4 | 1-27/32 | 15/64 | 5-7/8 | 950 |
| 13/16 | 2-3/32 | 17/64 | 6-5/8 | 1,350 |
| 15/16 | 2-5/16 | 19/64 | 7-1/2 | 1,800 |
| 1 | 2-5/16 | 19/64 | 7-1/2 | 1,800 |
| 1-1/4 | 3 | 13/32 | 9-3/4 | 3,400 |
| 1-5/16 | 3 | 13/32 | 9-3/4 | 3,780 |
| 1-1/2 | 3-3/8 | 15/32 | 11-1/4 | 5,800 |
| 1-5/8 | 3-15/16 | 17/32 | 13 | 9,000 |

3.3 Materials. The materials used in the manufacturing of the wrenches shall be such as to produce wrenches conforming to the physical requirements hereinafter described.

3.4 Marking. Each wrench shall be marked on one of the faces or on the handle as close to each head as is practicable in a plain and permanent manner. In addition to size markings, each wrench shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.5 Hardness. Wrenches shall be treated to a Rockwell C hardness not less that 38 nor more than 55 when tested per ASTM-E-18.

3.6 Torque Loads. When tested as specified in ASME-B107.6, the wrenches shall withstand the proof loads specified in the included table without failure or permanent deformation which might affect the durability or serviceability of the wrenches..

3.7 Wrench Opening. The nut and bolt head-engaging surfaces of the open end wrench shall be finished in a smooth and well-defined manner. The tips (working ends) of all open end wrenches shall also be chamfered or rounded to eliminate burrs. Wrench opening tolerances shall be such as to insure acceptance when gaged with gages conforming to ASME B107.17M.

3.8 Finish.

3.8.1 Surface Finish. All surfaces shall be thoroughly cleaned, free from cracks, and essentially free from burrs, pits, nodules, and other detrimental deficiencies.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

3.8.2 Coatings. The coatings shall be black oxide (3.8.2.1). The coating shall be adherent, smooth, continuous, and free from uncoated areas, pits, blisters, nodules, and any other defects which would interfere with their protective value and serviceability.

3.8.2.1 Black Oxide. Oxide coated wrenches shall have a coating consisting of a chemically produced oxide followed by a coating of rust preventive.

4. REGULATORY REQUIREMENTS.

4.1 Recovered Material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The product provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawing , specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Preservation, packaging and marking shall be as specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Source of Documents.

American Society of Mechanical Engineers (ASME) Manuel Gutierrez, Managing Director, 3 Park Avenue, New York, NY 10016.

American Society for testing and Materials (ASTM), 100 Barr Harbor Dr., W. Conshohocken, PA, 19428-2959.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington DC. 20401-9371.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents.

a. Title, number and date of Commercial Item Description.
b. Wrench Opening
c. Packaging requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSN's). A list of NSN's assigned that correspond to this CID. The list may not be indicative of all possible NSN's associated with the CID.

| National Stock Number | Wrench Opening (Distance Across Flats) Inches |
|---|---|
| 5120-00-064-2614 | 7/16 |
| 5120-00-081-9072 | ½ |
| 5120-00-081-9073 | 3/16 |
| 5120-00-081-9074 | 5/8 |
| 5120-00-081-9075 | 11/16 |
| 5120-00-529-5117 | 3/4 |
| 5120-00-529-5116 | 13/16 |
| 5120-00-293-1325 | 15/16 |
| 5120-00-529-5119 | 1 |
| 5120-00-293-1797 | 1-1/4 |
| 5120-00-081-9082 | 1-5/16 |
| 5120-00-081-9083 | 1-1/2 |
| 5120-00-529-5118 | 1-5/8 |

7.4 Key words. Wrench; Open end; Single thin head; 15° head.

MILITARY INTERESTS:
NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:
GSA-FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.