A-A-2563
March 25, 1988

COMMERCIAL ITEM DESCRIPTION

CROWBAR

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-B-101, Type II, Classes 1 and 2, Sizes 2 and 4.

This commercial item description covers crowbars.

SALIENT CHARACTERISTICS

Material. The material used in the manufacture of the bars shall be either tool steel or an alloy steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the specified tests. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability. Special quality, fine grain, hot rolled or cold finished carbon steel may also be used.

Design. The bars, otherwise meeting the requirements of this specification, may be the manufacturer's standard design.

Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The body of the bars shall be either lacquered, enameled, painted, or have an oil-coated natural finish. The work ends of Type II bars shall have a satin finish, and shall be oil or phosphate coated, lacquered or painted.

Type II, crowbars. Crowbars shall have a round handle tapering slightly toward the handle end. The work end shall be equal in width to the distance across the flat surfaces of the bar. The bar shall not fracture nor show a permanent set when tested in accordance with the physical test.

Hardness. The work end of the bar shall show a Rockwell C hardness of not less than 38 nor more than 48, or a hardness reading of not less than 353 nor more than 455 on the Brinell scale.

Table I. Type II, classes 1 and 2 crowbar, pinch-point and wedge-point.

National Stock Number	Class	Size Number	A Min Max	B ±1/16	C Minimum	D ±3/16	Area of Hardness from Pinch or Wedge Point Minimum	Test Load Minimum
			Inches	Inches	Inches	Inch	Inches	Pounds
5120-00-240-6040	1	2	47 49	1	2-1/2	3/4	5	150
5120-00-224-1390	1	4	59 62	1-1/4	3	7/8	6	200
5120-00-242-6624	2	4	59 62	1-1/4	3	7/8	6	200

Class 1, pinch-point. The formed end of class 1 bars shall have square sides with a flat single beveled edge. The bars shall conform to table I and be similar to figure 1.

FSC 5120

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

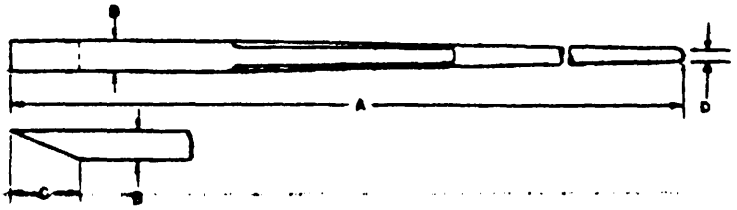


FIGURE 1. Type II, class 1, crowbar, pinch-point.

Class 2, wedge-point. The formed end of class 2 bars shall have square sides with a double-beveled edge. The bars shall conform to table I and be similar to figure 2.

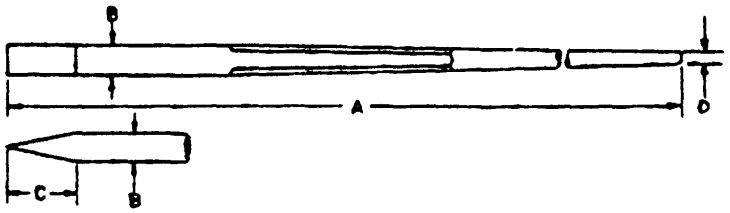


FIGURE 2. Type II, class 2, crowbar, wedge-point.

Identification marking. Each crowbar shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number, and country of origin.

Workmanship. All bars shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise specified herein. The lot size shall consist of all bars offered for acceptance at one time. The sample unit is one crowbar.

Visual inspection. Each crowbar from the sample lot shall be examined for workmanship and marking requirements. The inspection level shall be I with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Dimensional inspection. Each crowbar from the sample lot shall be examined for dimensional requirements. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Testing of end item. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 percent defective.

Hardness test. Hardness test shall be in accordance with ASTM E18 or ASTM E10. Impressions taken on pinch or wedge point end of Type II bars shall be taken within the area specified in table I.

Physical test. The sample crowbars shall be subjected to the following tests: Two inches of the pointed end (or work end) shall be held securely or supported in a holder, such as a vise, and the test load specified in table I applied midway of the handle section in a direction perpendicular to the body. The bar, after being tested, shall meet the hardness requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.

The issue of referenced documents in effect on date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements.

ASTM standards are available from American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Military standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Air Force - 99

Review Activities
Air Force - 84

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.