INCH POUND

A-A-59603
JUNE 22, 2004

COMMERCIAL ITEM DESCRIPTION

TESTING KIT, PETROLEUM, FUEL SYSTEM ICING INHIBITOR

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1.0 SCOPE. The Testing Kit is a complete kit providing a quick, easy method for determining the volume percent of fuel system icing inhibitor (FSII).

2.0 CLASSIFICATION

2.1 Classification. Anti-Icing Fuel Test Kits will be of the following types.

Type I – HB Direct Reading Type
Type II – Brix Type

2.2 Part or Identification Number (PIN). The following PIN procedures are for government purposes and do not constitute a requirement for the contractor.

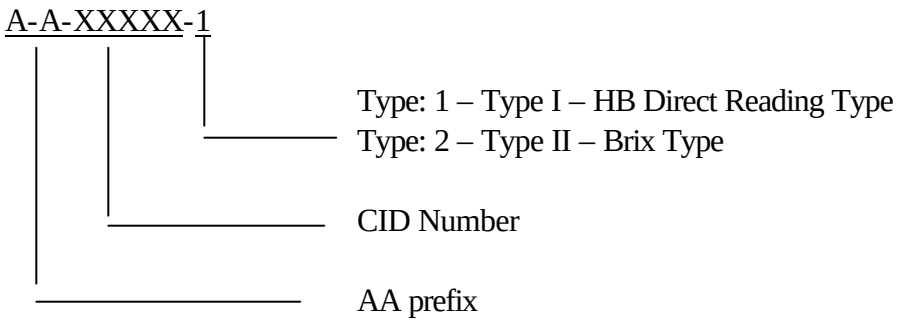

Comments, suggestions, or questions on this document should be addressed to WR-ALC/LEEE, 295 Byron Street, Robins AFB GA 31098. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil

AMSC N/A FSC 6630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

3.0 SALIENT CHARACTERISTICS

3.1 Description: The equipment, as described below, shall be provided. A current complete kit, with all items required for use shall be offered/provided. The Anti-Icing Test Kit shall be used in accordance with ASTM D 5006 specifications. The items listed in this section describe the components of this anti-icing test kit.

3.2 Type I Characteristics:

3.2.1 Refractometer: The refractometer shall be HB type direct reading and temperature compensated 0 to 0.250 percent volume (% v), to allow for easy reading of the percent volume at any temperature without the use of any conversion charts.

3.2.2 Operating Temperature: The operating temperature range shall be +64 to +95 degrees F (+18 to +35 degrees C).

3.2.3 Extraction Vessel: The extraction vessel shall be any suitable vessel of at least 200 mL with provisions for isolating a small column of water extract.

3.2.4 Measuring Vessel: The measuring vessel shall be any vessel capable of measuring up to 160 mL of fuel to an accuracy of +/- 2.0 mL.

3.2.5 Water Dispenser: The water dispenser shall be any vessel capable of dispensing small amounts of water. The preferred dispenser shall be a 2.0 mL pipette, but syringes or burettes not exceeding 5.0 mL capacity that can dispense2.0 +/- 0.2 mL may be used.

3.2.6 Support Base: One (1) support base, rod and ring is required as part of this kit.

3.2.7 Carrying Case: All components of this kit including operating instructions shall be contained in a foam insert carrying case.

3.2.8 Net Weight: The net weight shall not exceed 10.0 lbs (4.5 kg) for the entire kit including the carrying case.

3.3 Type II Characteristics:

3.3.1 Refractometer: The refractometer shall be a 0 to 30 Brix type temperature compensated unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

3.3.2 Operating Temperature: The operating temperature shall be +60 to +100 degrees F (+15 to +37 degrees C).

3.3.3 Extraction Vessel: The extraction vessel shall be a suitable vessel of at least 200 mL with provisions for isolating a small column of water extract. Examples are separatory funnels, (glass or plastic), or plastic dropping bottles.

3.3.4 Measuring Vessel: The measuring vessel shall be any vessel capable of measuring up to 160 mL of fuel to an accuracy of +/- 2 mL, such as a 250 mL graduated cylinder, or other calibrated container.

3.3.5 Water Dispenser: The water dispenser shall be a 1.0 mL pipettes (preferred), or syringes, or burettes not exceeding 5.0 mL capacity that can dispense 1.0 +/- 0.1 mL may be used

3.3.6 Support Base: One (1) support base, rod and ring is required as part of this kit.

3.3.7 Carrying Case: All components of this kit including operating instructions shall be contained in a foam insert carrying case.

3.3.8 Net Weight: The net weight shall not exceed 10.0 lbs (4.5 kg) for the entire kit including the carrying case.

4.0 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation.

5.0 PRODUCT CONFORMANCE PROVISIONS

5.1 Product Conformance: The products provided shall conform to the producer's own drawings specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance. Minor changes to the commercial product, with respect to ruggedizing and environmental suitability and protection shall be permitted, subject to the approval of the procurement office, to satisfy the requirements of this requirement.

5.2 Installation and Demonstration: If required by the end user, the contractor shall be responsible for user orientation of the equipment at the designated facility and demonstrate that the equipment is ready for use. Installation and demonstration is projected to take one day. The cost for user orientation shall be at no additional cost to the government.

5.3 Market Acceptability: The following market acceptability criteria are necessary to document the quality of the product to be provided under this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

5.3.1 The manufacturer of the item shall have been producing a product meeting these requirements for at least 5 years.

5.3.2 The manufacturer of the item shall have sold at least 50 units meeting these requirements to the government and or the commercial market over the last 2 years.

5.4 Alternative offers: A current, complete instrument with all items required for use, shall be offered/provided. If an alternative/replacement item is offered, descriptive literature (commercial catalogs, specification sheets, etc.) shall be submitted with the quote, for review and evaluation by the cognizant engineer who will coordinate qualifying the instrument with the end user and or applicable engine program office. If the instrument has not been purchased previously by the government and meets the evaluation process, the instrument shall be subjected to functional testing prior to final approval by the government.

5.5 Serviceability, Reliability, and Quality of Materials:

5.5.1 One copy of the commercial operation and maintenance manual(s) shall be shipped with the equipment. One additional copy of the operation and maintenance manual shall be shipped to the cognizant engineer at no additional cost to the government. The address for the cognizant engineer is found in 5.5.2.

5.5.2 All supplied items shall carry a standard commercial warranty on parts and labor. Information on warranty duration and expiration date, conditions and point of contact shall be shipped with each unit. One additional copy of the warranty information shall be shipped to the cognizant engineer at no additional cost to the government. The address for the cognizant engineer: FSC 6630 Engineer, WR-ALC/LEEE, 295 Byron Street, Robins AFB, GA 31098-1611.

6.0 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7.0 NOTES

7.1 Source of Documents

7.2 The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC, 20402.

7.2.1 ASTM document. ASTM documents can be obtained by contacting the American Society for Testing and Materials, 100 Barr Harbor Dr., P. O. Box C700, West Conshohocken, PA 19428-2959, or call 1-800-262-1373.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

7.3 Suggested Sources of Supply.

Type I source of supply:

Gammon Technical Products, Inc.
2300 Hwy 34
Manasquan NJ 08735

Type II source of supply:

Aviation Laboratories
5401 Mitchelldale B-6
Houston TX 77092

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 84

Agent:
Air Force – 99

Project Number 6630-0594

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.