
FED. SUP CLASS. 5307

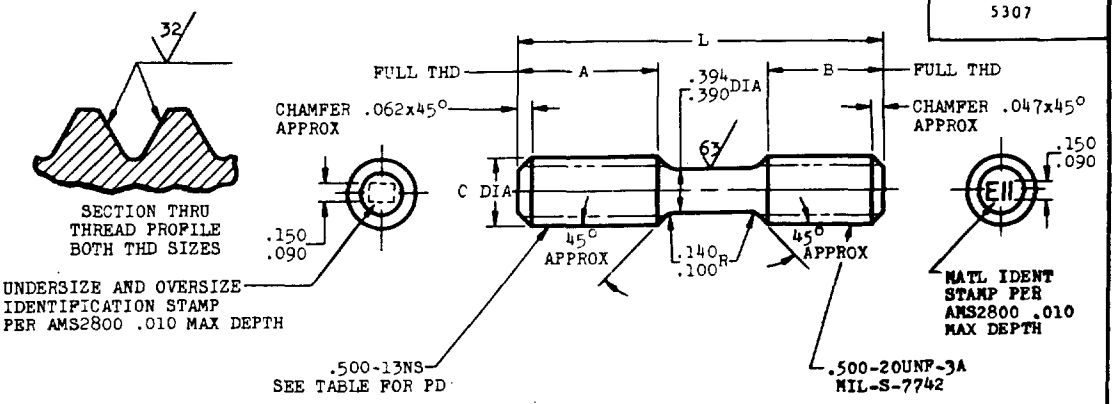

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.495 -.500	.495 -.500	.495 -.500	.495 -.500	.504 -.509	.504 -.509
PD BEFORE PLATING			.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.467
PD AFTER PLATING			.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.468
PD LEAD THREAD			.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.462
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBE
2.000	1.000	.750	AN127505	AN127506	AN127507	AN127508	AN127509	AN127510
2.062	1.000	.812	AN127511	AN127512	AN127513	AN127514	AN127515	AN127516
2.125	1.000	.875	AN127517	AN127518	AN127519	AN127520	AN127521	AN127522
2.188	1.000	.875	AN127523	AN127524	AN127525	AN127526	AN127527	AN127528
2.250	1.250	.750	AN127529	AN127530	AN127531	AN127532	AN127533	AN127534
2.312	1.250	.812	AN127535	AN127536	AN127537	AN127538	AN127539	AN127540
2.375	1.250	.875	AN127541	AN127542	AN127543	AN127544	AN127545	AN127546
2.438	1.250	.875	AN127547	AN127548	AN127549	AN127550	AN127551	AN127552
2.500	1.250	.875	AN127553	AN127554	AN127555	AN127556	AN127557	AN127558
2.562	1.250	.875	AN127559	AN127560	AN127561	AN127562	AN127563	AN127564
2.625	1.250	.875	AN127565	AN127566	AN127567	AN127568	AN127569	AN127570
2.688	1.250	.875	AN127571	AN127572	AN127573	AN127574	AN127575	AN127576
2.750	1.250	.875	AN127577	AN127578	AN127579	AN127580	AN127581	AN127582
2.875	1.250	.875	AN127583	AN127584	AN127585	AN127586	AN127587	AN127588
3.000	1.250	.875	AN127589	AN127590	AN127591	AN127592	AN127593	AN127594
3.125	1.250	.875	AN127595	AN127596	AN127597	AN127598	AN127599	AN127600
3.250	1.250	.875	AN127601	AN127602	AN127603	AN127604	AN127605	AN127606
3.375	1.250	.875	AN127607	AN127608	AN127609	AN127610	AN127611	AN127612
3.500	1.250	.875	AN127613	AN127614	AN127615	AN127616	AN127617	AN127618
3.625	1.250	.875	AN127619	AN127620	AN127621	AN127622	AN127623	AN127624
3.750	1.250	.875	AN127625	AN127626	AN127627	AN127628	AN127629	AN127630
3.875	1.250	.875	AN127631	AN127632	AN127633	AN127634	AN127635	AN127636
4.000	1.812	.875	AN127637	AN127638	AN127639	AN127640	AN127641	AN127642
4.125	1.812	.875	AN127643	AN127644	AN127645	AN127646	AN127647	AN127648
4.250	1.812	.875	AN127649	AN127650	AN127651	AN127652	AN127653	AN127654
4.375	1.812	.875	AN127655	AN127656	AN127657	AN127658	AN127659	AN127660
4.500	1.812	.875	AN127661	AN127662	AN127663	AN127664	AN127665	AN127666
4.625	1.812	.875	AN127667	AN127668	AN127669	AN127670	AN127671	AN127672
4.750	1.812	.875	AN127673	AN127674	AN127675	AN127676	AN127677	AN127678
4.875	1.812	.875	AN127679	AN127680	AN127681	AN127682	AN127683	AN127684
5.000	1.812	.875	AN127685	AN127686	AN127687	AN127688	AN127689	AN127690
5.125	1.812	.875	AN127691	AN127692	AN127693	AN127694	AN127695	AN127696
5.250	1.812	.875	AN127697	AN127698	AN127699	AN127700	AN127701	AN127702
5.375	1.812	.875	AN127703	AN127704	AN127705	AN127706	AN127707	AN127708
5.500	1.812	.875	AN127709	AN127710	AN127711	AN127712	AN127713	AN127714
5.625	1.812	.875	AN127715	AN127716	AN127717	AN127718	AN127719	AN127720
5.750	1.812	.875	AN127721	AN127722	AN127723	AN127724	AN127725	AN127726

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

PA 11 CUST AV, AS 11	AIR FORCE-NAVY AERONAUTICAL STANDARD STUD - STRAIGHT, NECKED, .500-13 x .500-20	AN127493 THRU AN127786

*U.S. GOVERNMENT PRINTING OFFICE: 1987-201-015/3017

Project No. 5307-0351

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall not be used for procurement or for use in new design, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2025-05-20
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43951