
FED. SUP CLASS.
5307

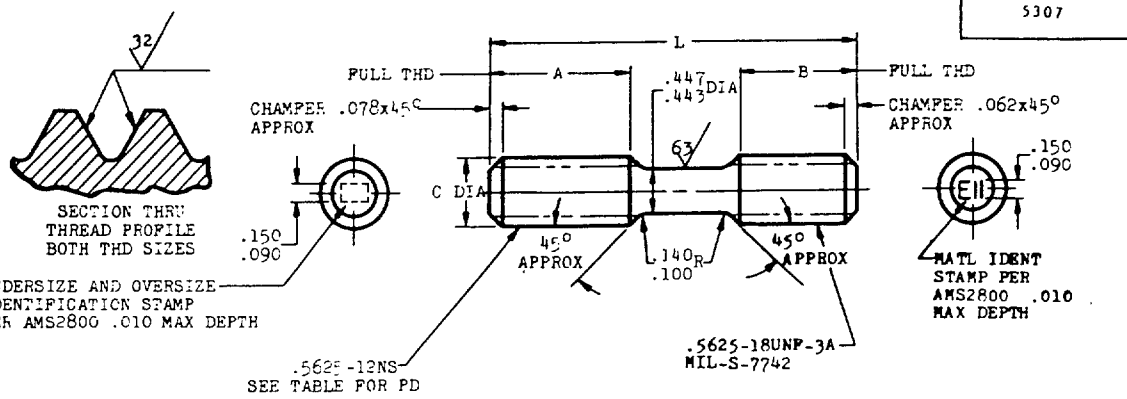

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.557 -.562	.557 -.562	.557 -.562	.557 -.562	.566 -.571	.566 -.571
PD BEFORE PLATING			.5104-.5114	.5134-.5144	.5164-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING			.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD			.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.188	1.125	.812	AN127799	AN127800	AN127801	AN127802	AN127803	AN127804
2.250	1.125	.875	AN127805	AN127806	AN127807	AN127808	AN127809	AN127810
2.312	1.125	.938	AN127811	AN127812	AN127813	AN127814	AN127815	AN127816
2.375	1.125	1.000	AN127817	AN127818	AN127819	AN127820	AN127821	AN127822
2.438	1.125	1.000	AN127823	AN127824	AN127825	AN127826	AN127827	AN127828
2.500	1.406	.812	AN127829	AN127830	AN127831	AN127832	AN127833	AN127834
2.562	1.406	.875	AN127835	AN127836	AN127837	AN127838	AN127839	AN127840
2.625	1.406	.938	AN127841	AN127842	AN127843	AN127844	AN127845	AN127846
2.688	1.406	1.000	AN127847	AN127848	AN127849	AN127850	AN127851	AN127852
2.750	1.406	1.000	AN127853	AN127854	AN127855	AN127856	AN127857	AN127858
2.812	1.406	1.000	AN127859	AN127860	AN127861	AN127862	AN127863	AN127864
2.875	1.406	1.000	AN127865	AN127866	AN127867	AN127868	AN127869	AN127870
2.938	1.406	1.000	AN127871	AN127872	AN127873	AN127874	AN127875	AN127876
3.000	1.406	1.000	AN127877	AN127878	AN127879	AN127880	AN127881	AN127882
3.125	1.406	1.000	AN127883	AN127884	AN127885	AN127886	AN127887	AN127888
3.250	1.406	1.000	AN127889	AN127890	AN127891	AN127892	AN127893	AN127894
3.375	1.406	1.000	AN127895	AN127896	AN127897	AN127898	AN127899	AN127900
3.500	1.406	1.000	AN127901	AN127902	AN127903	AN127904	AN127905	AN127906
3.625	1.406	1.000	AN127907	AN127908	AN127909	AN127910	AN127911	AN127912
3.750	1.406	1.000	AN127913	AN127914	AN127915	AN127916	AN127917	AN127918
3.875	1.406	1.000	AN127919	AN127920	AN127921	AN127922	AN127923	AN127924
4.000	2.031	1.000	AN127925	AN127926	AN127927	AN127928	AN127929	AN127930
4.125	2.031	1.000	AN127931	AN127932	AN127933	AN127934	AN127935	AN127936
4.250	2.031	1.000	AN127937	AN127938	AN127939	AN127940	AN127941	AN127942
4.375	2.031	1.000	AN127943	AN127944	AN127945	AN127946	AN127947	AN127948
4.500	2.031	1.000	AN127949	AN127950	AN127951	AN127952	AN127953	AN127954
4.625	2.031	1.000	AN127955	AN127956	AN127957	AN127958	AN127959	AN127960
4.750	2.031	1.000	AN127961	AN127962	AN127963	AN127964	AN127965	AN127966
4.875	2.031	1.000	AN127967	AN127968	AN127969	AN127970	AN127971	AN127972
5.000	2.031	1.000	AN127973	AN127974	AN127975	AN127976	AN127977	AN127978
5.125	2.031	1.000	AN127979	AN127980	AN127981	AN127982	AN127983	AN127984
5.250	2.031	1.000	AN127985	AN127986	AN127987	AN127988	AN127989	AN127990
5.375	2.031	1.000	AN127991	AN127992	AN127993	AN127994	AN127995	AN127996
5.500	2.031	1.000	AN127997	AN127998	AN127999	AN128000	AN128001	AN128002
5.625	2.031	1.000	AN128003	AN128004	AN128005	AN128006	AN128007	AN128008
5.750	2.031	1.000	AN128009	AN128010	AN128011	AN128012	AN128013	AN128014
5.875	2.031	1.000	AN128015	AN128016	AN128017	AN128018	AN128019	AN128020
6.000	2.031	1.000	AN128021	AN128022	AN128023	AN128024	AN128025	AN128026

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all previous Air Force-Navy standards for this product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

PA 11
CUST: AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT, NECKED, .5625-12 x .5625-18

AN127787
THRU
AN128086

Project No. 5307-0352

*U.S. GOVERNMENT PRINTING OFFICE: 1987-181-819/5817

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43883