
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN151101 THRU AN151400

FSC 5307

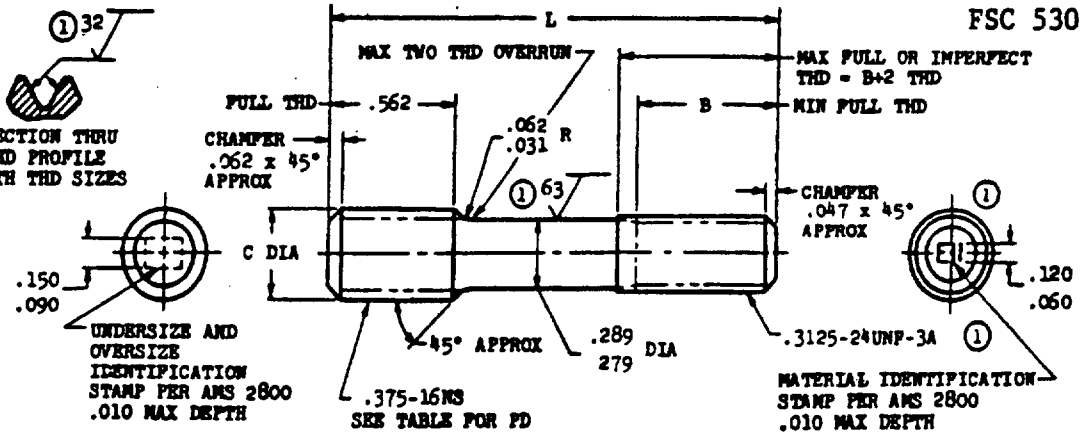

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (2)	+.012 (12)
C		.370- .375	.370- .375	.370- .375	.370- .375	.379- .384	.379- .384
PD BEFORE PLATING		.3357-.3367	.3387-.3397	.3417-.3427	.3447-.3457	.3477-.3487	.3507-.3517
PD AFTER PLATING		.3362-.3377	.3392-.3407	.3422-.3437	.3452-.3467	.3482-.3497	.3512-.3527
PD LEAD THREAD		.3294-.3314	.3324-.3344	.3354-.3374	.3384-.3404	.3414-.3434	.3444-.3464
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.188	.500	AN151119	AN151120	AN151121	AN151122	AN151123	AN151124
1.250	.562	AN151125	AN151126	AN151127	AN151128	AN151129	AN151130
1.312	.625	AN151131	AN151132	AN151133	AN151134	AN151135	AN151136
1.375	.625	AN151137	AN151138	AN151139	AN151140	AN151141	AN151142
1.438	.625	AN151143	AN151144	AN151145	AN151146	AN151147	AN151148
~~1.500~~ (a)	~~.625~~	~~AN151149~~	~~AN151150~~	~~AN151151~~	~~AN151152~~	~~AN151153~~	~~AN151154~~
1.562	.625	AN151155	AN151156	AN151157	AN151158	AN151159	AN151160
~~1.625~~ (a)	~~.625~~	~~AN151161~~	~~AN151162~~	~~AN151163~~	~~AN151164~~	~~AN151165~~	~~AN151166~~
1.688	.625	AN151167	AN151168	AN151169	AN151170	AN151171	AN151172
1.750	.625	AN151173	AN151174	AN151175	AN151176	AN151177	AN151178
1.812	.625	AN151179	AN151180	AN151181	AN151182	AN151183	AN151184
1.875	.625	AN151185	AN151186	AN151187	AN151188	AN151189	AN151190
1.938	.625	AN151191	AN151192	AN151193	AN151194	AN151195	AN151196
2.000	.625	AN151197	AN151198	AN151199	AN151200	AN151201	AN151202
2.062	.625	AN151203	AN151204	AN151205	AN151206	AN151207	AN151208
2.125	.625	AN151209	AN151210	AN151211	AN151212	AN151213	AN151214
2.188	.625	AN151215	AN151216	AN151217	AN151218	AN151219	AN151220
2.250	.625	AN151221	AN151222	AN151223	AN151224	AN151225	AN151226
2.312	.625	AN151227	AN151228	AN151229	AN151230	AN151231	AN151232
2.438	.625	AN151233	AN151234	AN151235	AN151236	AN151237	AN151238
2.562	.625	AN151239	AN151240	AN151241	AN151242	AN151243	AN151244
2.688	.625	AN151245	AN151246	AN151247	AN151248	AN151249	AN151250
2.812	.625	AN151251	AN151252	AN151253	AN151254	AN151255	AN151256
2.938	.625	AN151257	AN151258	AN151259	AN151260	AN151261	AN151262
3.062	.625	AN151263	AN151264	AN151265	AN151266	AN151267	AN151268
3.188	.625	AN151269	AN151270	AN151271	AN151272	AN151273	AN151274
3.312	.625	AN151275	AN151276	AN151277	AN151278	AN151279	AN151280
3.438	.625	AN151281	AN151282	AN151283	AN151284	AN151285	AN151286
3.562	.625	AN151287	AN151288	AN151289	AN151290	AN151291	AN151292
3.688	.625	AN151293	AN151294	AN151295	AN151296	AN151297	AN151298
3.812	.625	AN151299	AN151300	AN151301	AN151302	AN151303	AN151304
3.938	.625	AN151305	AN151306	AN151307	AN151308	AN151309	AN151310
4.062	.625	AN151311	AN151312	AN151313	AN151314	AN151315	AN151316
(1) (2) (4) 1.500	.719	AN151317	AN151318	AN151319	AN151320	AN151321	AN151322
1.531	.719	AN151323	AN151324	AN151325	AN151326	AN151327	AN151328
(1) (2) (4) 1.625	.812	AN151329	AN151330	AN151331	AN151332	AN151333	AN151334

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

(1) MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.
(1) (a) INACTIVE FOR DESIGN AFTER 25 MAR 1955. FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN No. 337.
DO NOT USE UNASSIGNED PART NUMBERS.
(2) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 15 May 50 REVISED (1) 25 Mar 55 (2) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN151101 THRU AN151400
NONE	(1) STUD-STEPPED, 1.5 DIA ENGAGEMENT, .375-16 x .3125-24	

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.

Project 5307-0367