
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN163701 THRU AN164000

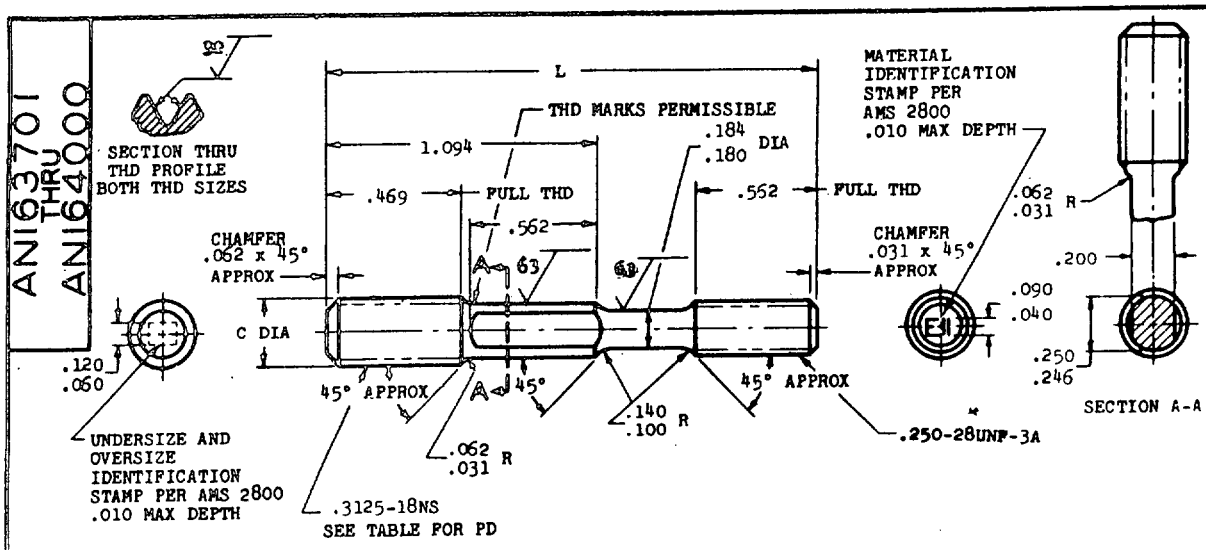

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.307- .312	.307- .312	.307- .312	.307- .312	.316- .321	.316- .321
PD BEFORE PLATING	.2775-.2785	.2805-.2815	.2835-.2845	.2865-.2875	.2895-.2905	.2925-.2935
PD AFTER PLATING	.2790-.2795	.2810-.2825	.2840-.2855	.2870-.2885	.2900-.2915	.2930-.2945
PD LEAD THREAD	.2714-.2734	.2744-.2764	.2774-.2794	.2804-.2824	.2834-.2854	.2864-.2884
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.906	AN163713	AN163714	AN163715	AN163716	AN163717	AN163718
1.969	AN163719	AN163720	AN163721	AN163722	AN163723	AN163724
2.031	AN163725	AN163726	AN163727	AN163728	AN163729	AN163730
2.094	AN163731	AN163732	AN163733	AN163734	AN163735	AN163736
2.156	AN163737	AN163738	AN163739	AN163740	AN163741	AN163742
2.219	AN163743	AN163744	AN163745	AN163746	AN163747	AN163748
2.344	AN163749	AN163750	AN163751	AN163752	AN163753	AN163754
2.469	AN163755	AN163756	AN163757	AN163758	AN163759	AN163760
2.594	AN163761	AN163762	AN163763	AN163764	AN163765	AN163766
2.719	AN163767	AN163768	AN163769	AN163770	AN163771	AN163772
2.844	AN163773	AN163774	AN163775	AN163776	AN163777	AN163778
2.969	AN163779	AN163780	AN163781	AN163782	AN163783	AN163784
3.094	AN163785	AN163786	AN163787	AN163788	AN163789	AN163790
3.219	AN163791	AN163792	AN163793	AN163794	AN163795	AN163796
3.344	AN163797	AN163798	AN163799	AN163800	AN163801	AN163802
3.469	AN163803	AN163804	AN163805	AN163806	AN163807	AN163808
3.594	AN163809	AN163810	AN163811	AN163812	AN163813	AN163814
3.719	AN163815	AN163816	AN163817	AN163818	AN163819	AN163820
3.844	AN163821	AN163822	AN163823	AN163824	AN163825	AN163826
3.969	AN163827	AN163828	AN163829	AN163830	AN163831	AN163832
4.094	AN163833	AN163834	AN163835	AN163836	AN163837	AN163838
4.219	AN163839	AN163840	AN163841	AN163842	AN163843	AN163844
4.344	AN163845	AN163846	AN163847	AN163848	AN163849	AN163850
4.469	AN163851	AN163852	AN163853	AN163854	AN163855	AN163856
4.594	AN163857	AN163858	AN163859	AN163860	AN163861	AN163862
4.719	AN163863	AN163864	AN163865	AN163866	AN163867	AN163868
4.844	AN163869	AN163870	AN163871	AN163872	AN163873	AN163874
4.969	AN163875	AN163876	AN163877	AN163878	AN163879	AN163880
5.094	AN163881	AN163882	AN163883	AN163884	AN163885	AN163886
5.219	AN163887	AN163888	AN163889	AN163890	AN163891	AN163892

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS.
(3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 17 May 54 (1) REVISED 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION

NONE

AIR FORCE-NAVY AERONAUTICAL STANDARD

[redacted], MS, WRENCH PAD, 1.5 DIA ENGAGEMENT, .3125-18 x .250-28

AN163701 THRU AN164000

E-25-121

Project 5307-0409

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.