USER SYMBOLS

REVIEWER SYMBOLS
ARMY - MI
NAVY - EC
DLA - IS
AF - 82

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for reprobuy use shall be made from this document.



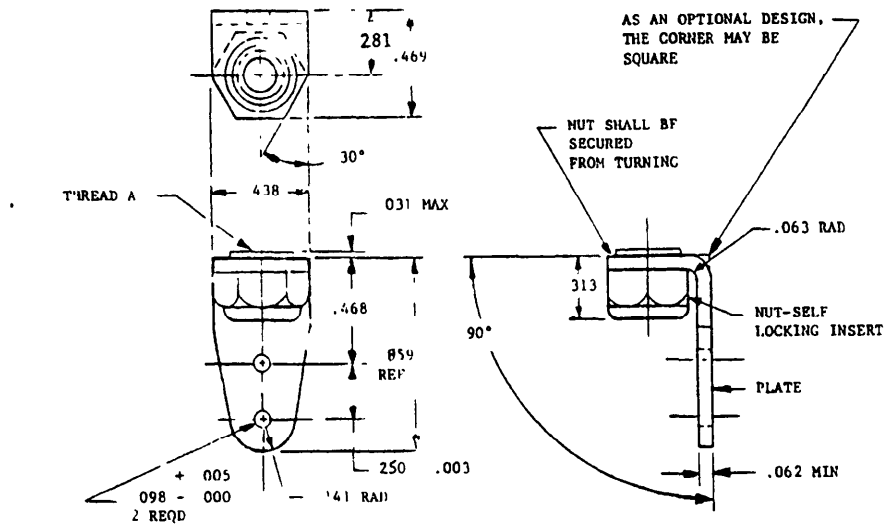



TABLE I. PART NUMBERS AND THREAD SIZES

| AN PART NO | | THREAD A |
|---|---|---|
| STEEL | ALUMINUM ALLOY | |
| AN256F6 | AN256-6 | .1380-32 UNJC-3B |
| AN256F8 | AN256-8 | 1640-32 UNJC-3B |
| AN256F10 | AN256-10 | 1900-32 UNJF-3B |

REQUIREMENTS.

1 MATERIAL PLATE ALUMINUM ALLOY PER QQ-A-250/11
NUT 2017 ALUMINUM ALLOY, T4 OR T451, PER QQ-A-225/5, OR C1018 STEEL PER ASTM-A-108
INSERT: NYLON OR EQUIVALENT

2 FINISH. ALUMINUM ALLOY - ANODIZE PER MIL-A-8625 TYPE I, CLASS 1
STEEL - CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2

3 SURFACE TEXTURE. PER ANSI B46.1 UNLESS OTHERWISE SPECIFIED, THE ROUGHNESS HEIGHT RATING SHALL NOT BE GREATER THAN 125 MICRO INCHES

NOTES:

1 DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.

2 DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14 5

3 UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE
DECIMALS ± .015, ANGLES ± 2°

4. THREADS SHALL BE IN ACCORDANCE WITH MIL-S-8879.

5 REMOVE ALL BURRS AND BREAK SHARP EDGES

6. FOR DESIGN AND USAGE LIMITATIONS SEE MS33588.

7 WHEN A CLINCH NUT IS USED IN FABRICATING THIS NUT, MEANS IN ADDITION TO THE CLINCH SHALL BE PROVIDED TO PREVENT ROTATIONAL MOVEMENT OF THIS NUT.

8 EXAMPLE OF PART NUMBER

AN 256 F 8 = STEEL NUT WITH .1640-32UNJC 3B THREAD,
- 8 — DESIGNATES THREAD SIZE (SEE TABLE I)
- F — "F" DESIGNATES STEEL NUT WITH ALUMINUM ALLOY PLATE
- — "—" DESIGNATES ALUMINUM ALLOY NUT WITH ALUMINUM ALLOY PLATE
- AN 256 — BASIC PART NUMBER

9 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED AND/OR INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 2 JAN 48 REVISED (5) 24 FEB 83

(5) REVISED AND REDRAWN

PROCUREMENT SPECIFICATION
MIL-N-25027

# AIR FORCE-NAVY AERONAUTICAL STANDARD

. NUT - SELF LOCKING, PLATE, RIGHT ANGLE ,250°F

# AN256

SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5310-0899 PLATE NO. 23066

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.

INCH-POUND

NOTICE
OF VALIDATION

AN256 Rev. 5
NOTICE 1
10 June 1994

MILITARY SPECIFICATION

# NUT & SELF LOCKING, RIGHT ANGLE PLATE (SUPERSEDES USAF 35A2939)

AN256 Rev. 5 dated 24-FEB-83 has been reviewed and determined to be valid for use in acquisition.

Custodians:
Air Force - 99
Army - AV
Navy - AS

Preparing activity:
DLA-IS

AMSC N/A

FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.