NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, for use in new design, not later than six months after the latest date of approval shown.


NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION MIL-V-5529

AIR FORCE-NAVY AERONAUTICAL STANDARD

VALVE - RADIAL TYPE 16 GPM HYDRAULIC DIRECTIONAL CONTROL

AN6215

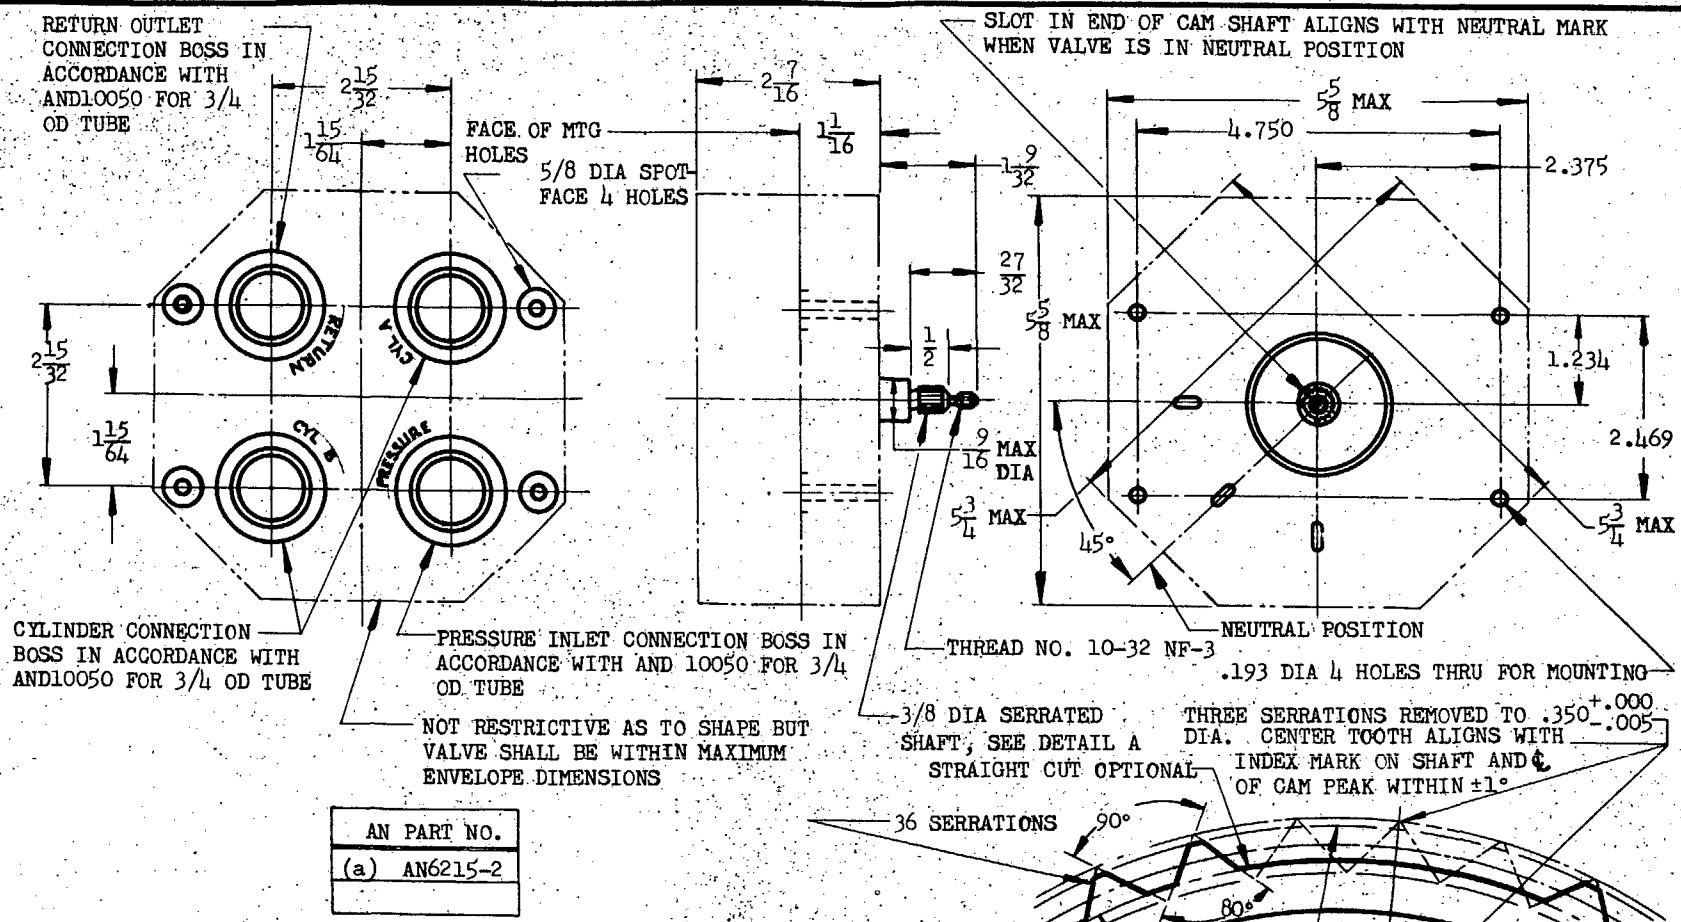

AN PART NO.
(a) AN6215-2

(a) PREVIOUS PART NO. AN6215-1 INACTIVE FOR DESIGN AFTER 23 MAY 1945. PART NO. AN6215-2 INCORPORATING HANDLE STOPS, REPLACES AND IS INTERCHANGEABLE WITH AN6215-1.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

FOR ACCEPTABLE PRODUCTS, SEE ANA BULLETIN NO. 119.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.

③ INACTIVE FOR DESIGN AFTER 10 JULY 1950. SEE DRAWING AN6293 OR, WHERE SUITABLE, AN6294.

APPROVED 28 May 43 REVISED ① 23 May 45 ② 19 Jul 48 ③ 10 Jul 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.