NOTE This drawing was approved by joint action of the AIR FORCE and Navy Departments as the AIR FORCE Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same pr[illegible] shall become effective for the procurement of aeronautical supplies, or for use in new design not late[illegible] 6 m[illegible] after the latest date of approval shown

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

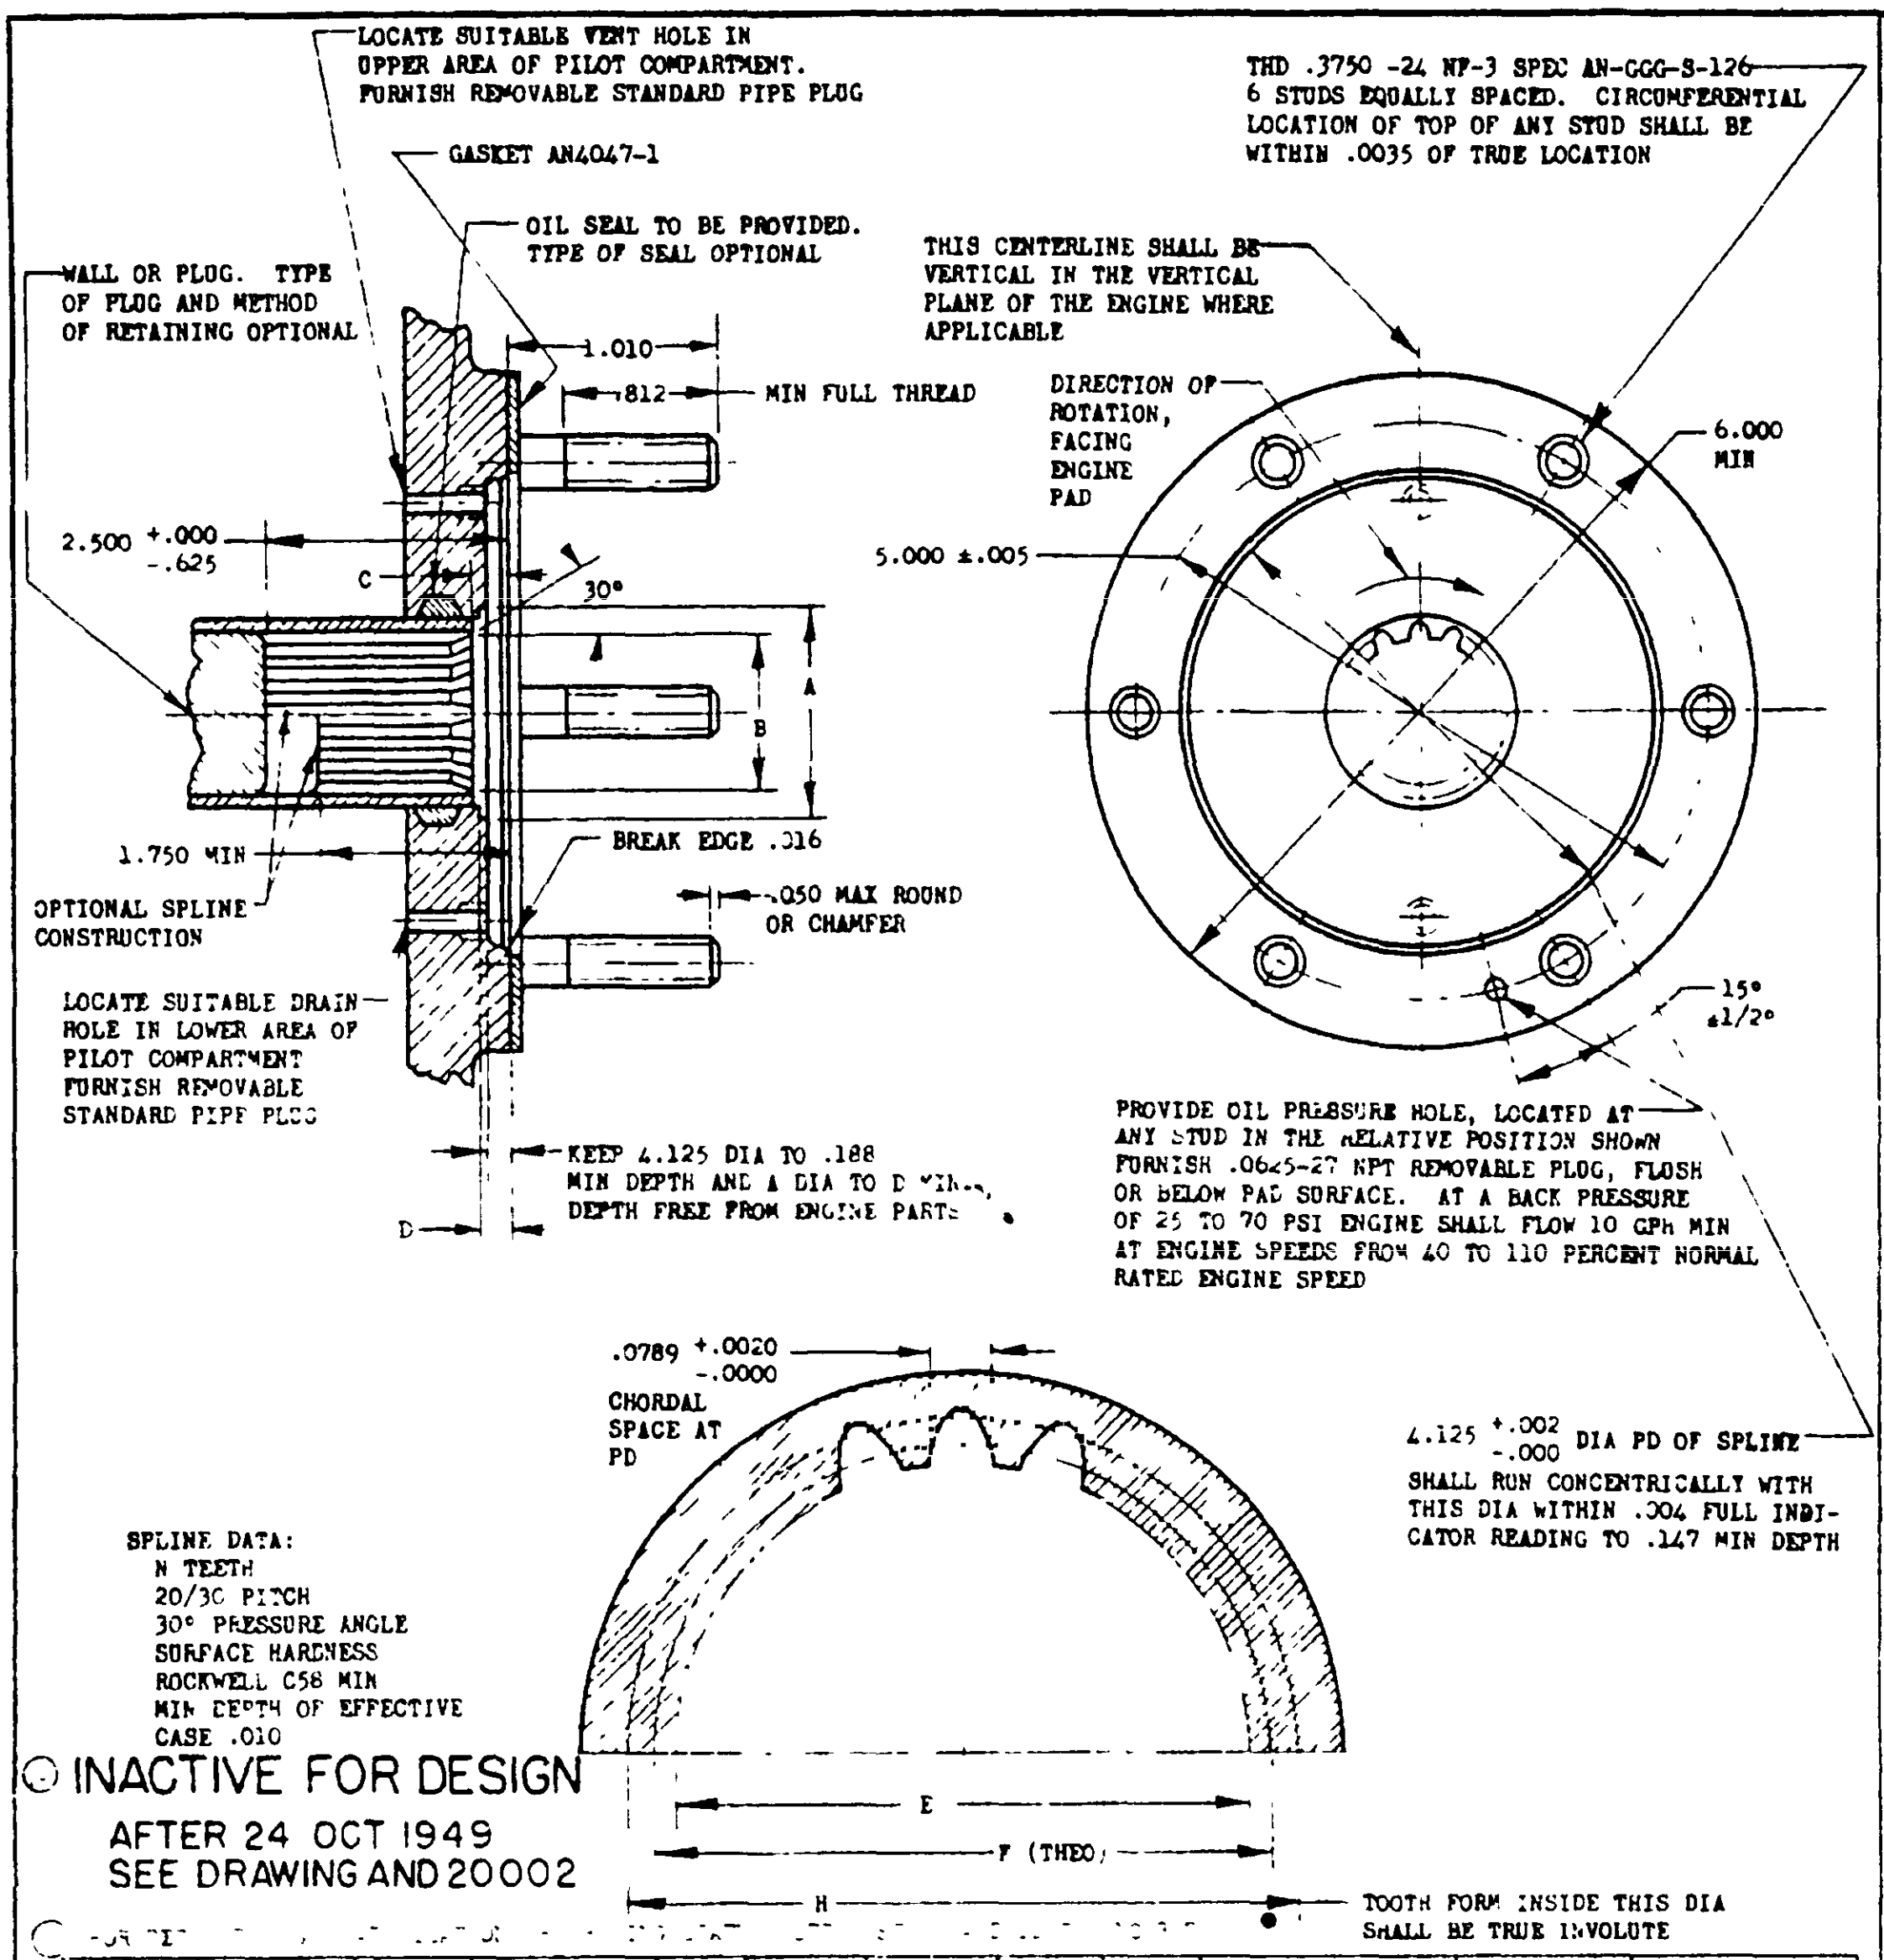
LOCATE SUITABLE VENT HOLE IN UPPER AREA OF PILOT COMPARTMENT. FURNISH REMOVABLE STANDARD PIPE PLUG
GASKET AN4047-1
OIL SEAL TO BE PROVIDED. TYPE OF SEAL OPTIONAL
WALL OR PLUG. TYPE OF PLUG AND METHOD OF RETAINING OPTIONAL
1.010
.812
MIN FULL THREAD
2.500 +.000 -.625
C
30°
A
B
1.750 MIN
OPTIONAL SPLINE CONSTRUCTION
BREAK EDGE .016
.050 MAX ROUND OR CHAMFER
LOCATE SUITABLE DRAIN HOLE IN LOWER AREA OF PILOT COMPARTMENT FURNISH REMOVABLE STANDARD PIPE PLUG
KEEP 4.125 DIA TO .188 MIN DEPTH AND A DIA TO D MIN. DEPTH FREE FROM ENGINE PARTS
D
THD .3750 -24 NF-3 SPEC AN-GGG-S-126 6 STUDS EQUALLY SPACED. CIRCUMFERENTIAL LOCATION OF TOP OF ANY STUD SHALL BE WITHIN .0035 OF TRUE LOCATION
THIS CENTERLINE SHALL BE VERTICAL IN THE VERTICAL PLANE OF THE ENGINE WHERE APPLICABLE
DIRECTION OF ROTATION, FACING ENGINE PAD
6.000 MIN
5.000 ±.005
15° ±1/2°
PROVIDE OIL PRESSURE HOLE, LOCATED AT ANY STUD IN THE RELATIVE POSITION SHOWN FURNISH .0625-27 NPT REMOVABLE PLUG, FLUSH OR BELOW PAD SURFACE. AT A BACK PRESSURE OF 25 TO 70 PSI ENGINE SHALL FLOW 10 GPH MIN AT ENGINE SPEEDS FROM 40 TO 110 PERCENT NORMAL RATED ENGINE SPEED
.0789 +.0020 -.0000 CHORDAL SPACE AT PD
4.125 +.002 -.000 DIA PD OF SPLINE SHALL RUN CONCENTRICALLY WITH THIS DIA WITHIN .004 FULL INDICATOR READING TO .147 MIN DEPTH
SPLINE DATA:
N TEETH
20/30 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS
ROCKWELL C58 MIN
MIN DEPTH OF EFFECTIVE
CASE .010
E
F (THEO)
H
TOOTH FORM INSIDE THIS DIA SHALL BE TRUE INVOLUTE

○ INACTIVE FOR DESIGN

AFTER 24 OCT 1949
SEE DRAWING AND 20002

TYPE	A DIA MIN	B DIA	C MAX	 MIN	D	E +.005 -.000	F P DIA (THEO)	H MIN	N TEETH	TORQUE POUND INCHES T_c	 T_c	 T_s	ACCESSORY WEIGHT LB (MAX)	THRUST ON PAD LB MAX
I A	-	.844	.250	.188	- -	.73	.800	.873	16	500	750	2200	50	150
II A	1.531	1.250	.375	.312	.380	1.133	1.200	1.273	24	1000	1500	4400	55	300
III A	1.531	1.250	.375	.312	.380	1.133	1.200	1.273	24	1500	2250	6600	55	450

ADAPTER BUSHING IN ACCORDANCE WITH AN4052-1 SHALL BE FURNISHED WITH TYPE II A AND TYPE III A DRIVES

PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT

SPEED: DRIVE SHAFT SPEED AT NORMAL RATED ENGINE SPEED SHALL BE 7500-8250 RPM

STRENGTH: TO BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (T_c) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND WITHOUT FAILURE OR PERMANENT DEFORMATION THE MAXIMUM STATIC TORQUE (T_s) REQUIRED TO SHEAR THE ACCESSORY SHEAR SECTION. IN ADDITION, THE DRIVES SHALL BE ADEQUATE FOR FIVE MINUTE PERIODS OF TORQUE OVERLOAD (T_o) OPERATION, WHICH OVERLOAD PERIODS SHALL BE CONSIDERED AS RECURRING AT 10 HOUR INTERVALS. THE TORQUE OVERLOAD RATING APPLIES ONLY UP TO AND INCLUDING 80 PERCENT NORMAL RATED SPEED

ACCESSORY DATA: MAX OVERHUNG MOMENT 350 IN.-LB. ACCESSORY CLEARANCE SHALL BE IN ACCORDANCE WITH AND10305

REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ±.010, ANGLES ±2°

APPROVED 30 Oct 42 REVISED ① 27 Dec 44 ② [illegible]

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

MOUNTING PAD AND DRIVE-
AIRCRAFT ENGINE GENERATOR AND POWER TAKE-OFF

AND10002

NOT A PART NUMBER

NOTICE: NO DEVIATION FROM THIS DRAWING SHALL BE PERMITTED EXCEPT AS A WAR EMERGENCY MEASURE AND THEN ONLY AFTER FORMAL AUTHORIZATION IS GRANTED BY THE AIR TECHNICAL SERVICE COMMAND ON ARMY CONTRACTS OR THE BUREAU OF AERONAUTICS ON NAVY CONTRACTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.