DOD-STD-35-37A(MI)

15 December 1978

SUPERSEDING
MIL-STD-35-37(MI)
10 MAY 1974

MILITARY STANDARD

INDUCTORS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Inductors
Automated Engineering
Document Preparation System

DOD-STD-35-37A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-37A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Inductors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	150
	B.	Characteristic Code Index	173
		Index	179

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for-Inductors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1286, Selection and Use of Transformers, Inductors, and Coils be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of-the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INDUCTOR, POWER	020001	MIL-T-27	POWER, AUDIO FREQ, HIGH Q, VARIABLE, FIXED
		MS16465	POWER, TYPE TF4RX04FA207
		MS16469	POWER, TYPE TF4RX04KB213
		MS75000	POWER, TYPE TF4RX04LA009
		MS75001	POWER, TYPE TF4RX04MA0l0
		MS75002	POWER, TYPE TF4RX04NA012
		MS75003	POWER, TYPE TF4RX04YY013
		MS90013	POWER, TYPE TF4RX04HA005
INDUCTOR, REACTOR	020002	MIL-T-27 MIL-T-83720	NONXPL, OPEN COIL AND CORE CONSTRUCTION
INDUCTOR, DECADE	020003	MIL-T-27	
CHOKE	020004	MIL-C-60190	VOLTAGE RGLTR (10525930)
		MIL-C-60194	VOLTAGE RGLTR (30525920)
REACTOR, POWER	020006	MIL-T–27	
REACTOR, NETWORK	020007	MIL–T-27	
REACTOR, SWITCHING	020008	MIL-T-27	
INDUCTOR, TOROIDAL	020009	MIL-T-27	

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
INDUCTOR, CHIP, THICK FILM, FIXED	020010	MIL-I-83446	FOR MELEC CKT
INDUCTOR, CHIP, SHIELDED, THICK FILM, FIXED	020911	MIL-I-83446	FOR MELEC CKT
INDUCTOR, CHIP, THICK FILM, VARIABLE	020012	MIL-I-83446	FOR MELEC CKT
INDUCTOR	020013	MIL-T-27 MIL-C-60190 MIL-C-60194 MIL-I-83446 MIL-T-83720	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-17214	Indicator, Permeability; Low-Mu (Go-No-Go)
MIL-I-83446	Inductors, Chip, Thick or Thin Film, Fixed or Variable, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation system
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-81O	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-883	Test Methods and Procedures for Micro-electronics
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated. the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Inductors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Inductors, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Inductors.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Inductors.

4.3.2 Illustrations. Illustrations applicable to Inductors are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats-selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Inductor characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3576	MAX VOLT AMPERES	1838	MIN SECOND RESN FREQ KILOHERTZ	1839	MIN SECOND RESN FREQ MEGAHERTZ
2101	VOLTAGE RMS	2153	MILLIVOLTS RMS	2154	WORKING VOLTS
2155	WORKING MILLIVOLTS	2102	MAX CUR AMPERES AC	2103	MAX CUR AMPERES DC
2156	MAX CUR MILLI AMPERES AC	2157	MAX CUR MILLI AMPERES DC	2104	IMPEDANCE OHMS
2105	IMPEDANcE OHMS TOL PERCENT	2106	MAX DC RES OHMS	2107	MAX DC RES TOL PCT
2108	INDUCTANCE HENRIES	2158	INDUCTANCE MILLI HENRIES	2159	INDUCTANCE MICRO HENRIES
2606	INDUCTANCE TOL PCT	2309	MINIMUM Q FACTOR	2160	MAX POWER LVL WATTS
2161	MAX POWER LEVEL MILLIWATTS	2162	FREQUENCY HERTZ	2163	FREQUENCY KILOHERTZ

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

0101 0101.

0102 0102.

0103 0103.

0104 0104.

0105 0105.

1003 1003.

1004 USER(S) FSCM(S) 1004.

1005 CONTRACT NUMBER OR OFFICE SYMBOL 1005.

1006 THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

1008 SYSTEM APPLICATION 1008.

6369 GOVERNMENT DESIGN ACTIVITY FSCM 6369.

0700

0800

SOURCE(S).

6873 THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT, IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD–35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI–ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY, HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE, REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
GRADE (DESIGNATION)	1562
CLASS (DESIGNATION)	1563
FAMILY (DESIGNATION)	1564
STYLE (DESIGNATION)	1565
TYPE (DESIGNATION)	1566
ENVELOPE AND MOUNTING (DESIGNATION)	1567
RATINGS	
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	GRADE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1563	CLASS 1563 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1564	FAMILY 1564 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1565	STYLE 1565 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1566	TYPE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1567	ENVELOPE AND MOUNTING 1567 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
TOLERANCE (PERCENT)	1835
(KILOHERTZ)	7641
TOLERANCE (PERCENT)	1836
LIFE EXPECTANCY RATING (HOURS)	1837
RESONANCE RATING (SELECT ONE)	
MINIMUM SECOND RESONANT FREQUENCY (KILOHERTZ)	1838
MINIMUM SECOND RESONANT FREQUENCY (MEGAHERTZ)	1839
TEMPERATURE RATING	
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
1835	THE FREQUENCY RATING TOLERANCE SHALL BE 1835 PERCENT.
7641	THE FREQUENCY RATING SHALL BE 76411 KILOHERTZ.
1836	THE FREQUENCY RATING TOLERANCE SHALL BE 1836 PERCENT.
1837	LIFE EXPECTANCY RATING. THE ITEM(S) SHALL HAVE A LIFE EXPECTANCY RATING OF 1837 HOURS.
1838	RESONANCE RATING. THE MINIMUM SECOND RESONANT FREQUENCY SHALL BE 11838 KILOHERTZ.
1839	RESONANCE RATING. THE MINIMUM SECOND RESONANT FREQUENCY SHALL BE 1839 MEGAHERTZ.
	TEMPERATURE RATING.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
TEMPERATURE RATING (CONT)	
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
VOLT AMPERE RATING	
MAXIMUM (VOLT AMPERES)	1576
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
73011	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301. DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
1576	VOLT AMPERE RATING. THE MAXIMUM VOLT AMPERE RATING SHALL BE 1576 VOLT AMPERE(S).
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD–STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE-NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANCT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
COLOR CODING OF WIRE LEAD TERMINALS	
SEE COLOR CODING OF WIRE LEAD TERMINALS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION.

COLOR CODING OF WIRE LEAD TERMINALS. TERMINALS CONSISTING OF WIRE LEADS SHALL BE COLOR CODED AS SHOWN IN THE COLOR CODING OF WIRE LEAD TERMINALS TABLE.

COLOR CODING OF WIRE LEAD TERMINALS TABLE

COLOR	TERMINAL NUMBER(S)
BLACK	4301
BROWN	4302
RED	4303
ORANGE	4304
YELLOW	4305
GREEN	4306
BLUE	4307
VIOLET	4308
GREY	4309
WHITE	4310
WHITE/BLACK	4311
WHITE/BROWN	4312
WHITE/RED	43113
WHITE/ORANGE	4314
WHITE/YELLOW	4315
WHITE/GREEN	43116
WHITE/BLUE	4317
WHITE/VIOLET	4318
WHITE/GREY	4319

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONSTRUCTION	
TYPE (SELECT ONE)	
OPEN.	1569
ENCAPSULATED/MOLDED.	1571
METAL ENCLOSED.	1572
HERMETIC SEALED.	1579
CORE (SELECT ONE)	
GROUND TO CASE.	1600
ELECTRICALLY ACCESSIBLE.	1602
DUTY CYCLE (SELECT ONE)	
(PERCENT)	1574
CONTINUOUS.	1577

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1569	CONSTRUCTION. THE INDUCTOR SHALL BE ON THE OPEN TYPE CONSTRUCTION.
1571	CONSTRUCTION. THE INDUCTOR SHALL BE OF THE ENCAPSULATED/MOLDED TYPE CONSTRUCTION.
1572	CONSTRUCTION, THE INDUCTOR SHALL BE OF THE METAL ENCLOSED TYPE CONSTRUCTION.
1579	CONSTRUCTION. THE INDUCTOR SHALL BE OF THE HERMETRIC SEALED TYPE OF CONSTRUCTION.
1600	CORE. THE CORE SHALL BE GROUNDED TO THE CASE.
1602	CORE. THE CORE SHALL BE ELECTRICALLY ACCESSIBLE.
1574	DUTY CYCLE. THE DUTY CYCLE SHALL BE 1574 PERCENT.
1577	DUTY CYCLE. THE DUTY CYCLE SHALL BE CONTINUOUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ELECTRICAL CHARACTERISTICS	
SEE ELECTRICAL CHARACTERISTICS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS. THE ELECTRICAL CHARACTERISTICS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS TABLE

	COIL NUMBER				
	1	2	3	4	5
ILLUS TERM IDENT	2100	2110	2120	2130	2140
PROD TERM IDENT	2151	2164	2177	2190	2203
VOLTAGE					
VOLTS RMS	2101	2111	2121	2131	2141
MILLIVOLTS RMS	2153	2166	2179	2192	2205
WORKING VOLTS	2154	2167	2180	2193	2206
WORKING MILLIVOLTS	2155	2168	2181	2194	2207
MAX CURRENT					
AMPERES AC	2102	2112	2122	2132	2142
AMPERES DC	2103	2113	2123	2133	2143
MILLIAMPERES AC	2156	2169	2182	2195	2208
MILLIAMPERES DC	2157	2170	2183	2196	2209
IMPEDANCE, OHMS	2104	2114	2124	2134	2144
IMPEDANCE TOL, PCT	2105	2115	2125	2135	2145
MAX DC RESISTANCE, OHMS	2106	2116	2126	2136	2146
DC RESISTANCE TOL, PCT	2107	2117	2127	2337	2147
INDUCTANCE					
HENRIES	2108	2118	2128	2138	2148
MILLIHENRIES	2158	2171	2184	2197	2210
MICROHENRIES	2159	2172	2185	2198	2211
TOLERANCE, PCT	2606	2613	2620	2627	2634
MIN Q FACTOR	2109	2119	2129	2139	21149

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ELECTRICAL CHARACTERISTICS (CONT)	
MAGNETIZING CURRENT	
MINIMUM (AMPERES RMS)	1603
PHASE SHIFT	
MAXIMUM (DEGREES)	1604

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS TABLE (CONT)

	COIL NUMBER				
	1	2	3	4	5
MAX POWER LEVEL					
WATTS	2160	2173	2186	2199	2212
MILLIWATTS	2161	2174	2187	2200	2213
FREQUENCY					
HERTZ	2162	2175	2188	2201	2214
KILOHERTZ	2163	2176	2189	2202	2235

(A) NOTE: 2661.
(B) NOTE: 2662.
(C) NOTE: 2663.
(D) NOTE: 2664.
(E) NOTE: 2665.
(F) NOTE: 2666.
(G) NOTE: 2667.
(H) NOTE: 2668.

1603 MAGNETIZING CURRENT. THE MAGNETIZING CURRENT SHALL BE NOT LESS THAN 1603 AMPERE(S) RMS.

1604 PHASE SHIFT. THE PHASE SHIFT SHALL BE NOT GREATER THAN 1604 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
NO DISCONTINUITY.	7345
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 Kilogram

6272 ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 62720

6273 ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

7345 THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.

6250 ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (CONT)	
PER MIL–STD–202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD–202, METHOD 212. (CONT)	
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
ELECTRICAL LOAD (SELECT ONE)	
(PERCENT OF THE RATED LOAD)	6210
(OHMS)	6266
ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
NO EVIDENCE OF PHYSICAL DAMAGE.	2301
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2304
PER MIL-STD-883, METHOD 2011.	2305
MOUNT PER DOCUMENT (DOC DES)	2307

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6263 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

6264 MOUNTING SHALL BE BY THE NORMAL METHOD.

6265 MOUNTING SHALL BE IN ACCORDANCE WITH ~~6265~~.

6210 THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.

6266 THE ELECTRICAL LOAD SHALL BE ~~6266~~ OHM(S).

2300 ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.

2301 ADHESION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2304 ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2304~~.

2305 ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2011 OF MIL-STD-883.

2307 MOUNTING SHALL BE IN ACCORDANCE WITH ~~2307~~.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHESION (CONT)	
PER MIL–STD–833, METHOD 2011. (CONT)	
PULL FORCE ON TERMINALS (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2308
(POUNDS)	2309
SI (SELECT ONE)	
(GRAMS)	2310
(NEWTONS)	2311
ANGLE OF PULL (DEGREES)	2312
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1599
AS FOLLOWS:	1596
MAXIMUM CAPACITANCE BETWEEN WINDINGS (MICROFARADS)	1597
MAXIMUM CAPACITANCE BETWEEN WINDINGS AND GROUND (MICROFARADS)	1598

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2308	THE PULL FORCE ON THE TERMINAL(S) SHALL BE 2308 OUNCE(S).
2309	THE PULL FORCE ON THE TERMINAL(S) SHALL BE 2309 POUND(S).
2310	THE PULL FORCE ON THE TERMINAL(S) SHALL BE 2310 GRAM(S).
2311	THE PULL FORCE ON THE TERMINAL(S) SHALL BE 2311 NEWTON(S).
2312	THE ANGLE OF PULL TO THE SURFACE OF THE TEST ITEM SHALL BE 2312 DEGREE(S).
1599	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1599.
1596	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1597	THE CAPACITANCE BETWEEN WINDINGS SHALL BE NOT GREATER THAN 1597 MICROFARAD(S).
1598	THE CAPACITANCE BETWEEN WINDINGS AND GROUND SHALL BE NOT GREATER THAN 1598 MICROFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1591
PER MIL-STD–202, METHOD 305.	1589
FREQUENCY (HERTZ)	1592
MINIMUM MEASUREMENT ACCURACY (PERCENT)	1593
POLARIZING VOLTAGE (VOLTS DC)	1594
(WRITE-IN)	1587
CORONA DISCHARGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
MAXIMUM CORONA DEFLECTION PEAK-TO-PEAK (INCH)	1662
MAXIMUM CORONA DEFLECTION PEAK-TO–PEAK (MILLIMETERS)	1663
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER MIL-T–27,	1665

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1591	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1591.
1589	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL–STD–202.
1592	THE TEST FREQUENCY SHALL BE 3592 HERTZ.
1593	THE MEASUREMENT ACCURACY SHALL BE NOT LESS THAN 1593 PERCENT.
1594	THE POLARIZING VOLTAGE SHALL BE 1594 VOLT(S) DC.
1587	1587.
1660	CORONA DISCHARGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1662	CORONA DISCHARGE. THE CORONA DEFLECTION SHALL BE NOT GREATER THAN 1662 INCH(S) PEAK-TO-PEAK.
1663	CORONA Discharge THE CORONA DEFLECTION SHALL BE NOT GREATER THAN 1663 MILLIMETER(S) PEAK-TO-PEAK.
1652	CORONA DISCHARGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1665	CORONA DISCHARGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-27.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA DISCHARGE (CONT)	
PER MIL-T–270 (CONT)	
TEST ALTITUDE (SELECT ONE)	
(FEET)	1656
(METERS)	1666
PEAK TERMINAL VOLTAGE (PERCENT)	1654
TEST VOLTAGE (VOLTS RMS)	1667
TERMINALS (IDENTIFICATION)	1668
MAXIMUM INCLINATION ANGLE (DEGREES)	1657
(WRITE-IN)	1669
TEST CIRCUIT NUMBER 1 ILLUSTRATION (NUMBER)	2320
TEST (PURPOSE)	2321
TEST (PARAMETERS)	2322
TEST CIRCUIT COMPONENTS AS FOLLOWS:	2323
RESISTORS _____	2324
CAPACITORS _____	2325
DIODES _____	2326
TRANSISTORS _____	2327
OTHER _____	2328

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1656	THE TEST ALTITUDE SHALL BE 1656 FEET.
1666	THE TEST ALTITUDE SHALL BE 1666 METERS.
1654	THE PEAK TERMINAL VOLTAGE SHALL BE ~~1654~~ PERCENT*
1667	THE TEST VOLTAGE SHALL BE 1667 VOLT(S) RMS.
1668	THE TEST VOLTAGE SHALL BE APPLIED TO TERMINALS ~~1668~~.
1657	THE INCLINATION ANGLE SHALL BE NOT GREATER THAN ~~1657~~ DEGREE(S).
1669	1669.
2320	TEST CIRCUIT NUMBER 1. THE ITEM(S) SHALL BE TESTED IN ACCORDANCE WITH ILLUSTRATION 2320.
2321	THE TEST PURPOSE SHALL BE TO 2321.
2322	THE TEST PARAMETERS SHALL BE 2322.
2323	TEST CIRCUIT COMPONENTS SHALL BE AS FOLLOWS:
2324	THE RESISTOR(S) SHALL BE 2324.
2325	THE CAPACITOR(S) SHALL BE 2325.
2326	THE DIODE(S) SHALL BE 2326.
2327	THE TRANSISTOR(S) SHALL BE 2327.
2328	OTHER CIRCUIT COMPONENT(S) SHALL BE 2328.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA DISCHARGE (CONT)	
PER MIL-T-27. (CONT)	
TEST CIRCUIT NUMBER 2 ILLUSTRATION (NUMBER)	2331
TEST (PURPOSE)	2332
TEST (PARAMETERS)	2333
TEST CIRCUIT COMPONENTS AS FOLLOWS:	2334
RESISTORS _____	2335
CAPACITORS _____	2336
DIODES _____	2337
TRANSISTORS _____	2338
OTHER _____	2339
TEST CIRCUIT NUMBER 3 ILLUSTRATION (NUMBER)	2341
TEST (PURPOSE)	2342
TEST (PARAMETERS)	2343
TEST CIRCUIT COMPONENTS AS FOLLOWS:	2344
RESISTORS _____	2345
CAPACITORS _____	2346
DIODES _____	2347
TRANSISTORS _____	2348
OTHER _____	2349

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2331	TEST CIRCUIT NUMBER 2. THE ITEM(S) SHALL BE TESTED IN ACCORDANCE WITH ILLUSTRATION 2331.
2332	THE TEST PURPOSE SHALL BE TO 2332.
2333	THE TEST PARAMETERS SHALL BE 2333.
2334	TEST CIRCUIT COMPONENTS SHALL BE AS FOLLOWS:
2335	THE RESISTOR(S) SHALL BE 2335.
2336	THE CAPACITOR(S) SHALL BE 2336.
2337	THE DIODE(S) SHALL BE 2337.
2338	THE TRANSISTOR(S) SHALL BE 2338.
2339	OTHER CIRCUIT COMPONENT(S) SHALL BE 2339.
2341	TEST CIRCUIT NUMBER 30 THE ITEM(S) SHALL BE TESTED IN ACCORDANCE WITH ILLUSTRATION 2341.
2342	THE TEST PURPOSE SHALL BE TO 2342.
2343	THE TEST PARAMETERS SHALL BE 2343.
2344	TEST CIRCUIT COMPONENTS SHALL BE AS FOLLOWS:
2345	THE RESISTOR(S) SHALL BE 2345.
2346	THE CAPACITOR(S) SHALL BE 2346.
2347	THE DIODE(S) SHALL BE 2347.
2348	THE TRANSISTOR(S) SHALL BE 2348.
2349	OTHER CIRCUIT COMPONENT(S) SHALL BE 2349.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COUPLING AMONG UNITS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1772
MAXIMUM COUPLING VOLTAGE (VOLTS RMS)	1774
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
PER MIL–T-27.	2361
INPUT VOLTAGE (VOLTS RMS)	1764
MINIMUM FREQUENCY (KILOHERTZ)	1766
MAXIMUM FREQUENCY (KILOHERTZ)	1768
ELECTRICAL LOAD (OHMS)	2362
WRITE-IN)	2363
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
PER ELECTRICAL CHARACTERISTICS TABLE.	1818

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1772 COUPLING AMONG UNITS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.

1774 COUPLING AMONG UNITS. THE COUPLING VOLTAGE SHALL BE NOT GREATER THAN 1774 VOLT(S) RMS.

1762 COUPLING AMONG UNITS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.

2361 COUPLING AMONG UNITS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–T–27.

1764 THE INPUT VOLTAGE SHALL BE 1764 VOLT(S) RMS.

1766 THE TEST FREQUENCY SHALL BE NOT LESS THAN 1766 KILOHERTZ.

1768 THE TEST FREQUENCY SHALL BE NOT GREATER THAN 1768 KILOHERTZ.

2362 THE ELECTRICAL LOAD SHALL BE 2362 OHM(S).

2363 2363.

1816 DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.

1818 DC RESISTANCE. THE DC RESISTANCE SHALL BE AS SHOWN IN THE ELECTRICAL CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-STD-202, METHOD 303.	1804
MAXIMUM TEST CURRENT (MILLIAMPERES)	1806
MEASURING INSTRUMENT ACCURACY WITHIN (PERCENT)	1810
PERIOD OF UNINTERRUPTED TEST (SECONDS)	1812
TEST VOLTAGE (VOLTS DC)	1808
(WRITE-IN)	2365
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (SELECT ONE)	
(MILLIAMPERES)	4894
(MICROAMPERES)	4896

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1802 DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

1804 DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD–202.

1806 THE CURRENT SHALL BE NOT GREATER THAN 1806 MILLIAMPERE(S).

1810 MEASURING EQUIPMENT SHALL BE WITHIN 1810 PERCENT ACCURACY.

1812 THE TEST SHALL BE FOR 1812 SECOND(S) OF UNINTERRUPTED TIME.

1808 THE TEST VOLTAGE SHALL BE 1808 VOLT(S) DC.

2365 2365.

4908 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

4906 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4894 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

4896 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4896 MICROAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL–STD–202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4901 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4884 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

6300 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL–STD-202.

4886 ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL–STD-202.

4885 TEST VOLTAGE SHALL BE 4885 VOLTS, DC.

4849 TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPEREs)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4891 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

6308 REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

4900 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS, THAN 4900 KILOVOLTAMPERE (S).

4902 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).

6310 THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (SELECT ONE)	
(MILLIAMPERES)	4875
(MICROAMPERES)	4817
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD–202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4817	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4817 MICROAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL–STD–202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
EFFECTIVE PARALLEL RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2371
EFFECTIVE RESISTANCE (KILOHMS)	2372
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2375

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

4870 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S),

2371 EFFECTIVE PARALLEL RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2371.

2372 EFFECTIVE PARALLEL RESISTANCE. THE EFFECTIVE PARALLEL RESISTANCE SHALL BE 2372 KILOHM(S).

2375 EFFECTIVE PARALLEL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2375.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EFFECTIVE PARALLEL RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-I–83446.	2376
FREQUENCY (MEGAHERTZ)	2377
CAPACITANCE (PICOFARADS)	2378
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1974
NO EVIDENCE OF EXPLOSION OR VIOLENT BURNING.	1976
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1966
PER MIL-STD–202, METHOD 109.	1967
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1968
ELECTRICAL LOAD (OHMS)	1970
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1944

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2376 EFFECTIVE PARALLEL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I–83446.

2377 TEST FREQUENCY SHALL BE 2377 MEGAHERTZ.

2378 THE CAPACITANCE SHALL BE 2378 PICOFARAD(S).

1974 EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3974.

1976 EXPLOSION. THERE SHALL BE NO EVIDENCE OF EXPLOSION OR VIOLENT BURNING.

1966 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.

1967 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL–STD–202.

1968 THE CHAMBER TEMPERATURE SHALL BE 1968 DEGREES CELSIUS.

1970 THE ELECTRICAL LOAD SHALL BE 1970 OHM(S).

1944 FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1944.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	
NO EXPLOSIVE FLAME.	1948
NO DRIPPING OF FLAMMABLE MATERIAL.	1952
MAXIMUM BURNING DURATION (SECONDS)	1946
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1954
WINDINGS SHALL REMAIN ELECTRICALLY CONTINUOUS.	1950
ELECTRICAL CHARACTERISTICS SHALL NOT EXCEED THE VALUES SPECIFIED IN THE ELECTRICAL CHARACTERISTICS TABLE.	1956
MAXIMUM INDUCTANCE CHANGE (PERCENT)	1958
MAXIMUM DC RESISTANCE CHANGE (PERCENT)	1960
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER MIL-STD-202, METHOD 111.	1923

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1948	THERE SHALL BE NO EXPLOSIVE FLAME.
1952	THERE SHALL BE NO DRIPPING OF FLAMMABLE MATERIAL.
1946	THE BURNING TIME SHALL BE NOT GREATER THAN 1946 SECOND(S).
1954	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1954 MEGOHM(S).
1950	THE WINDINGS SHALL REMAIN ELECTRICALLY CONTINUOUS.
1956	THE ELECTRICAL CHARACTERISTICS SHALL NOT EXCEED THE VALUES SPECIFIED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1958	THE INDUCTANCE CHANGE SHALL BE NOT GREATER THAN 1958 PERCENT.
1960	THE DC RESISTANCE CHANGE SHALL BE NOT GREATER THAN 1960 PERCENT.
1922	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1923	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 121 OF MIL–STD–202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
PER MIL–STD–202, METHOD 111. (CONT)	
DIRECTION OF FLAME AXIS (SELECT ONE)	
ANY SUITABLE DIRECTION.	1928
HORIZONTAL.	1930
(WRITE-IN)	1931
POINT OF FLAME IMPINGEMENT (SELECT ONE)	
ANY SUITABLE POINT.	1924
POINT PER MIL–T–27.	1926
MINIMUM DURATION OF FLAME APPLICATION (SECONDS)	1932
EXAMINATIONS AND MEASUREMENTS AFTER TEST _____	1933
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1928 THE DIRECTION OF AXIS OF FLAME SHALL BE ANY SUITABLE DIRECTION.

1930 THE DIRECTION OF AXIS OF FLAME SHALL BE HORIZONTAL.

1931 1931.

1924 THE POINT OF IMPINGEMENT OF FLAME SHALL BE ANY SUITABLE POINT.

1926 THE POINT OF IMPINGEMENT OF FLAME SHALL BE IN ACCORDANCE WITH MIL–T–27.

1932 THE DURATION OF FLAME IMPINGEMENT SHALL BE NOT LESS THAN 1932 SECOND(S).

1933 EXAMINATIONS AND MEASUREMENTS AFTER TEST SHALL BE 1933.

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL–STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HIGH TEMPERATURE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
NO EVIDENCE OF PHYSICAL DAMAGE.	2401
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2404

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS performed THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL–STD–810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

2400 HIGH TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.

2401 HIGH TEMPERATURE EXPOSURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2404 HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2404.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH TEMPERATURE EXPOSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-I–83446.	2405
HIGH TEMPERATURE (DEGREES CELSIUS)	2406
DURATION OF EXPOSURE (HOURS)	2407
TOLERANCE (HOURS)	2408
DURATION AT AMBIENT TEMPERATURE PRIOR TO MEASUREMENTS (HOURS)	2410
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	48115
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2405 HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-83446.

2406 THE HIGH TEMPERATURE SHALL BE 2406 DEGREES CELSIUS.

2407 DURATION OF EXPOSURE TO THE HIGH TEMPERATURE SHALL BE 2407 HOUR(S).

2408 DURATION OF EXPOSURE TOLERANCE SHALL BE 2408 HOUR(S).

2410 DURATION OF TEST AT AMBIENT TEMPERATURE PRIOR TO MEASUREMENT(S) SHALL BE 2410 HOUR(S).

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

4815 THERE SHALL BE NO DEGRADATION OF Performance

1477 THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.

4795 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD–202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (SELECT ONE)	
(HOURS)	4790
(MINUTES)	4794

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4805 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.

4813 DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.

4803 DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.

4788 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

4853 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL–STD–202.

4890 TEST CONDITION LETTER 4890 SHALL APPLY.

4793 MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.

4790 DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

4794 DURATION OF APPLICATION OF VOLTAGE SHALL BE 4794 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 14030 (CONT)	
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	49711
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
NO EVIDENCE OF MOISTURE PENETRATION.	4866

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING,
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4866	THERE SHALL BE NO EVIDENCE OF MOISTURE PENETRATION.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD–202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INCREMENTAL CURRENT INDUCTANCE REDUCTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2415
INDUCTANCE REDUCTION (PERCENT)	2416
INDUCTANCE REDUCTION LESS THAN INDUCTANCE MEASURED WITH ZERO DC CURRENT.	2417

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4809 IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.

4810 IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL–STD-202.

4811 TEST CONDITION LETTER 4811 SHALL APPLY.

4812 FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.

4814 MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

2415 INCREMENTAL CURRENT INDUCTANCE REDUCTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2415.

2416 INCREMENTAL CURRENT INDUCTANCE REDUCTION* THE INCREMENTAL CURRENT INDUCTANCE REDUCTION VALUE SHALL REPRESENT A REDUCTION OF 2416 PERCENT.

2417 INCREMENTAL CURRENT INDUCTANCE REDUCTION. THE INCREMENTAL CURRENT INDUCTANCE REDUCTION VALUE SHALL BE LESS THAN THE INDUCTANCE MEASURED WITH ZERO DC CURRENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCED VOLTAGE, REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1702
PER MIL-T-27.	1704
ALTITUDE PER MIL–STD-202, METHOD 105.	2428
TEST FREQUENCY (KILOHERTZ)	1708
MINIMUM DURATION OF APPLICATION (SECONDS)	1714
CYCLES (NUMBER)	1716
TEST VOLTAGE (VOLTS RMS)	2429
INDUCED PULSE WIDTH (MICROSECONDS)	2430
REPETITION RATE (PULSES PER SECOND)	2431
POINTS OF APPLICATION, TERMINALS (NAME)	2432
ELECTRICAL LOAD (OHMS)	2433
PROTECTIVE DEVICES PROVIDED (NAME)	1712
(WRITE-IN)	2434
INDUCED VOLTAGE, SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2440

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	INDUCED VOLTAGE, REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	INDUCED VOLTAGE, REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–T–27.
2428	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 2428 OF METHOD 1105 OF MIL–STD–2020
1708	THE TEST FREQUENCY SHALL BE 1708 KILOHERTZ.
1714	THE DURATION OF APPLIED VOLTAGE SHALL BE NOT LESS THAN 1714 SECOND(S).
1716	THERE SHALL BE 1716 TEST CYCLE(S).
2429	THE TEST VOLTAGE SHALL BE 2429 VOLT(S) RMS.
2430	THE INDUCED PULSE WIDTH SHALL BE 2430 MICROSECOND(S).
24311	THE REPETITION RATE SHALL BE 2431 PULSE(S) PER SECOND.
2432	THE POINTS OF APPLICATION SHALL BE 2432.
2433	THE ELECTRICAL LOAD SHALL BE 2433 OHM(S).
1712	PROTECTIVE DEVICE(S) PROVIDED SHALL BE 1712.
2434	2434.
2440	INDUCED VOLTAGE, SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2440.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCED VOLTAGE, SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2441
NO EVIDENCE OF CONTINUOUS ARCING OR BREAKDOWN IN INSULATION.	2442
MAXIMUM FLUCTUATION OF INPUT CURRENT (PERCENT)	2443
MAXIMUM CHANGE IN Q FACTOR (PERCENT)	2444
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2448
PER MIL–T–27.	2449
TEST FREQUENCY (KILOHERTZ)	2450
TEST VOLTAGE (VOLTS RMS)	2451
MINIMUM DURATION OF APPLICATION (SECONDS)	2452
CYCLES OF APPLICATION (NUMBER)	2453
INDUCED PULSE WIDTH (MICROSECONDS)	2454
REPETITION RATE (PULSES PER SECOND)	2455

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2441	INDUCED VOLTAGE, SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2442	THERE SHALL BE NO EVIDENCE OF CONTINUOUS ARCING OR BREAKDOWN IN INSULATION.
2443	FLUCTUATION OF INPUT CURRENT SHALL BE NOT GREATER THAN 2443 PERCENT.
2444	CHANGE IN Q FACTOR SHALL BE NOT GREATER THAN 2444 PERCENT.
2448	INDUCED VOLTAGE, SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2448.
2449	INDUCED VOLTAGE, SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-27.
2450	THE TEST FREQUENCY SHALL BE 2450 KILOHERTZ.
2451	THE TEST VOLTAGE SHALL BE 2451 VOLT(S) RMS.
2452	THE DURATION OF APPLIED VOLTAGE SHALL BE NOT LESS THAN 2452 SECOND(S).
2453	THERE SHALL BE 2453 TEST CYCLE(S).
2454	THE INDUCED PULSE WIDTH SHALL BE 2454 MICROSECOND(S).
2455	THE REPETITION RATE SHALL BE 2455 PULSE(S) PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCED VOLTAGE, SEA LEVEL (CONT)	
PER MIL–T-27. (CONT)	
POINTS OF APPLICATION, TERMINALS (NAME)	2456
ELECTRICAL LOAD (OHMS)	2458
(WRITE-IN)	2459
INDUCTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1748
PER ELECTRICAL CHARACTERISTICS TABLE.	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
PER MIL-T-27.	1744
TEST CURRENT (AMPERES DC)	2464
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	2466
(MEGAHERTZ)	2467
TEST VOLTAGE (VOLTS RMS)	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2456 THE POINTS OF APPLICATION SHALL BE TERMINAL(S) 2456.

2458 THE ELECTRICAL LOAD SHALL BE 2458 OHM(S).

2459 2459.

1748 INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1748.

2462 INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

3742 INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.

1744 INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T–27.

2464 THE TEST CURRENT SHALL BE 2464 AMPERE(S) DC.

2466 THE TEST FREQUENCY SHALL BE 2466 HERTZ.

2467 THE TEST FREQUENCY SHALL BE 2467 MEGAHERTZ.

2468 THE TEST VOLTAGE SHALL BE 2468 VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCTANCE (CONT)	
PER MIL–T-27. (CONT)	
TERMINALS (NAME)	2469
(WRITE-IN)	2470
PER MIL-I–83446.	2471
TEST CURRENT (AMPERES DC)	2472
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	2473
(MEGAHERTZ)	2474
TEST VOLTAGE (VOLTS RMS)	2475
TERMINALS (NAME)	2476
(WRITE-IN)	2477
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2469	THE TERMINAL(S) TO BE USED IN MEASURING INDUCTANCE SHALL BE 2469.
2470	2470.
2471	INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–I–83446.
2472	THE TEST CURRENT SHALL BE 2472 AMPERE(S) DC.
2473	THE TEST FREQUENCY SHALL BE 2473 HERTZ.
2474	THE TEST FREQUENCY SHALL BE 2474 MEGAHERTZ.
2475	THE TEST VOLTAGE SHALL BE 2475 VOLT(S) RMS.
2476	THE TERMINAL(S) TO BE USED IN MEASURING INDUCTANCE SHALL BE 2476.
2477	2477.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE- THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD–202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1386 INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE ~~1376~~ SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL–STD–202, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
LOW TEMPERATURE OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2480
NO EVIDENCE OF PHYSICAL DAMAGE.	2481

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
2480	LOW TEMPERATURE OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2480.
2481	LOW TEMPERATURE OPERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
LOW TEMPERATURE OPERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2483
PER MIL–I–83446.	2484
LOW TEMPERATURE (DEGREES CELSIUS)	2485
TOLERANCE (DEGREES CELSIUS)	2486
STABILIZATION TIME AT LOW TEMPERATURE (MINuTEs)	2487
TOLERANCE (MINUTES)	2488
APPLY RATED CONTINUOUS DC CURRENT AT LOW TEMPERATURE.	2489
DURATION (MINUTES)	2490
DURATION AT AMBIENT TEMPERATURE PRIOR TO EXAMINATION (HOURS)	2491
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2483 LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2483.

2484 LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–I–83446.

2485 THE LOW TEMPERATURE SHALL BE 2485 DEGREES CELSIUS.

2486 THE LOW TEMPERATURE TOLERANCE SHALL BE 2486 DEGREES CELSIUS.

2487 THE STABILIZATION TIME AT LOW TEMPERATURE SHALL BE 2487 MINUTE(S).

2488 THE STABILIZATION TOLERANCE AT LOW TEMPERATURE SHALL BE 2488 MINUTE(S).

2489 APPLY RATED CONTINUOUS DC CURRENT AT THE LOW TEMPERATURE.

2490 RATED CONTINUOUS DC CURRENT SHALL BE APPLIED AT THE LOW TEMPERATURE FOR 2490 MINUTE(S).

2491 THE INDUCTOR SHALL BE MAINTAINED AT AMBIENT TEMPERATURE FOR 2491 HOUR(S) PRIOR TO EXAMINATION.

1400 MOISTURE RESISTANCE, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL–STD–202, METHOD 106.	1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1396 MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

1398 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1394 THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

1429 CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.

1404 CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

1432 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.

1406 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

1391 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.

1397 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL–STD–202, METHOD 106. (CONT)	
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1634
MAXIMUM TOTAL SURFACE SHOWING EVIDENCE OF PHYSICAL DAMAGE (PERCENT)	1636
NO EVIDENCE OF ARCING, BURNING, OR CHARRING.	2493

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL–STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL–STD–202 IS NOT APPLICABLE.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1634	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1634.
1636	OVERLOAD. THE TOTAL SURFACE SHOWING EVIDENCE OF PHYSICAL DAMAGE SHALL BE NOT GREATER THAN 1636 PERCENT.
2493	OVERLOAD. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1612
PER MIL–T–27.	1614
AMBIENT TEMPERATURE (DEGREES CELSIUS)	1616
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1618
TEST VOLTAGE (VOLTS RMS)	1620
DURATION OF APPLIED VOLTAGE (HOURS)	1622
TEST CURRENT (AMPERES)	2494
TEST FREQUENCY (HERTZ)	1624
PER MIL–I–83446.	2495
TEST CURRENT (AMPERES DC)	2496
DURATION OF APPLIED CURRENT (MINUTES)	2497
PERCENT COUPLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
COUPLING (PERCENT)	2501

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1612 OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.

1614 OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–T–27.

1616 THE AMBIENT TEMPERATURE SHALL BE 1616 DEGREES CELSIUS.

1618 THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1618 DEGREES CELSIUS.

1620 THE TEST VOLTAGE SHALL BE 1620 VOLT(S) RMS.

1622 DURATION OF APPLIED VOLTAGE SHALL BE 1622 HOUR(S).

2494 THE TEST CURRENT SHALL BE 2494 AMPERE(S).

1624 THE TEST FREQUENCY SHALL BE 1624 HERTZ.

2495 OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–I–83446.

2496 THE TEST CURRENT SHALL BE 2496 AMPERE(S) DC.

2497 DURATION OF APPLIED CURRENT SHALL BE 2497 Minute

2500 PERCENT COUPLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.

2501 PERCENT COUPLING. PERCENT COUPLING SHALL BE 2501 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERCENT COUPLING (CONT)	
COUPLING (CONT)	
COEFFICIENT OF MUTUAL INDUCTANCE (MICROHENRIES)	2507
SERIES AIDING INDUCTANCE (MICROHENRIES)	2508
SERIES BUCKING INDUCTANCE (MICROHENRIES)	2509
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2504
PER MIL–I–83446.	2505
FREQUENCY (HERTZ)	2506
PERMEABILITY, MAGNETIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2515
MAXIMUM PERMEABILITY (MU)	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2519
TEST PER MIL-I-17214.	2520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2507 COEFFICIENT OF MUTUAL INDUCTANCE SHALL BE 2507 MICROHENRY(S).

2508 SERIES AIDING INDUCTANCE SHALL BE 2508 MICROHENRY(S).

2509 SERIES BUCKING INDUCTANCE SHALL BE 2509 MICROHENRY(S).

2504 PERCENT COUPLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2504.

2505 PERCENT COUPLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–I–83446.

2506 THE FREQUENCY SHALL BE 2506 HERTZ.

2515 PERMEABILITY, MAGNETIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2515.

2516 PERMEABILITY, MAGNETIC. THE INITIAL RELATIVE PERMEABILITY SHALL BE NOT GREATER THAN 2516 MU WHEN COMPARED TO AIR WHICH EQUALS 1.0.

2519 PERMEABILITY, MAGNETIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2519.

2520 PERMEABILITY, MAGNETIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-L7214.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
QUALITY FACTOR (Q)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1788
PER ELECTRICAL CHARACTERISTICS TABLE.	1790
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
PER MIL–STD–202, METHOD 306.	1784
*TEST FREQUENCY (HERTZ)	1785
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1788 QUALITY FACTOR (Q). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1788.

1790 QUALITY FACTOR (Q). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

1782 QUALITY FACTOR (Q). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.

1784 QUALITY FACTOR (Q). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 306 OF MIL-STD-202.

1785 THE TEST FREQUENCY SHALL BE 1785 HERTZ.

6291 RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

6371 RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE.)

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS. (CONT)	
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY)	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4857 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.

4858 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.

6282 RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.

4843 RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.

6286 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).

6285 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X–RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).

6287 THE VIEWING EQUIPMENT SHALL BE 6287.

6288 THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.

6289 THE DEFECTS TO BE SOUGHT SHALL BE 6289.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PER MIL–STD-202, METHOD 209. (CONT)	
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297
RANDOM DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4967
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4968

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6284 NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.

6283 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X–RAY FILM.

5297 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X–RAY FILM.

4967 RANDOM DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967.

4968 RANDOM DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM DROP (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4963
PER MIL–STD–202, METHOD 203.	4972
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD–202, METHOD 108.	6697

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4963	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4963~~.
4972	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL–STD-202.
6929	RELIABILITY SCREENING (BURN–IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN? AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
6696	RELIABILITY SCREENING (BURN–IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN–IN, AGEING, CONDITIONING STABILIZATION LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL–STD–202, METHOD 108. (CONT)	
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 005 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6698	TEST CONDITION LETTER ~~6698~~ SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE–HALF HOURS ON AND ONE–HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE ~~6706~~ VOLTS, AC.
6707	TEST POTENTIAL SHALL BE ~~6707~~ VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL–STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4673
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4700 RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.

4701 RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4718 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE*

4689 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.

4698 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL–STD–202.

4691 TEST CONDITION LETTER 4691 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED.

4692 DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

4669 DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).

4671 IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.

4989 SPECIAL PREPARATION SHALL BE PERMITTED.

4695 COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD–202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA,	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL–STD–202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
48311	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL–STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47700
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL–STD–202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47450
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
AS FOLLOWS: (CONT)	
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4746 THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD Sensitivity

4741 THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.

4734 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.

4732 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

4737 TEST CONDITION LETTER A SHALL APPLY.

4738 LIQUID FOR BUBBLE TEST BATH SHALL BE ~~47380~~

4739 TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.

6320 TEST CONDITION LETTER B SHALL APPLY.

6321 LIQUID FOR BUBBLE TEST BATH SHALL BE ~~6321~~.

6322 TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SELF–RESONANT FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
AS FOLLOWS:	2601

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6329	PROCEDURE NUMBER IV SHALL APPLY.
47511	CHAMBER PRESSURE SHALL BE ~~4751~~ TORR.
4735	CHAMBER PRESSURE SHALL BE ~~4735~~ KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE ~~4752~~ MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER ~~6330~~ SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2600	SELF-RESONANT FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2600~~.
2602	SELF-RESONANT FREQUENCY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SELF-RESONANT FREQUENCY (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM SELF–RESONANT FREQUENCY (SELECT ONE)	
(HERTz)	2602
(KILOHERTZ)	2603
(MEGAHERTZ)	2604
MAXIMUM SELF-RESONANT FREQUENCY (SELECT ONE)	
(HERTZ)	2605
(KILOHERTZ)	2609
(MEGAHERTZ)	2607
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2610
PER MIL-I–83446.	2611
AS FOLLOWS:	2612

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2602	SELF–RESONANT FREQUENCY SHALL BE NOT LESS THAN 2602 HERTZ.
2603	SELF–RESONANT FREQUENCY SHALL BE NOT LESS THAN 2603 KILOHERTZ.
2604	SELF-RESONANT FREQUENCY SHALL BE NOT LESS THAN 2604 MEGAHERTZ.
2605	SELF-RESONANT FREQUENCY SHALL BE NOT GREATER THAN 2605 HERTZ.
2609	SELF-RESONANT FREQUENCY SHALL BE NOT GREATER THAN 2609 KILOHERTZ.
2607	SELF-RESONANT FREQUENCY SHALL BE NOT GREATER THAN 2607 MEGAHERTZ.
2610	SELF–RESONANT FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610.
2611	SELF-RESONANT FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I–83446.
2612	SELF–RESONANT FREQUENCY. TESTING SHALL BE PERFORMED AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SELF–RESONANT FREQUENCY (CONT)	
AS FOLLOWS: (CONT)	
PRIMARY VOLTAGE (VOLTS RMS)	2618
LOAD IMPEDANCE (OHMS)	2614
MINIMUM SOURCE FREQUENCY (HERTZ)	2615
MAXIMUM SOURCE FREQUENCY (HERTZ)	2616
(WRITE-IN)	2617
SHOCK, HIGH-IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
NO DISCONTINUITY DURING TEST.	1451
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL–STD–202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

26118 THE PRIMARY VOLTAGE SHALL BE 2618 VOLT(S) RMS.

2614 THE LOAD IMPEDANCE SHALL BE 2614 OHM(S).

2615 THE SOURCE FREQUENCY SHALL BE NOT LESS THAN 2615 HERTZ.

2616 THE SOURCE FREQUENCY SHALL BE NOT GREATER THAN 2616 HERTZ.

2617 2617.

1494 SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1451 THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

1486 SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.

1482 SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD–202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD–202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL–STD–202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
PERCENT RATED LOAD APPLIED (PERCENT)	6203
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 2113.	1500
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL–STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD–202; METHOD 213. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL–STD-202, METHOD 208.	4683

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD–202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL–STD-202, METHOD 208. (CONT)	
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	11830
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1832
NO EVIDENCE OF PHYSICAL DAMAGE.	1834
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4666 4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

4667 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).

4663 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

4664 THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.

4665 THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.

6205 SPECIAL PREPARATION SHALL BE PERMITTED.

1830 TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.

1832 TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1832 DEGREES CELSIUS.

1834 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE,

1822 TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
TEST METHODS (CONT)	
PER MIL–T–27.	2630
METHOD (NUMBER)	1824
MINIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	2631
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	1826
PULSE VOLTAGE (VOLTS PEAK)	2632
PULSE WIDTH (MICROSECONDS)	2633
REPETITION RATE (PULSES PER SECOND)	2642
ELECTRICAL LOAD (OHMS)	2635
TEST CURRENT (AMPERES DC)	2636
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	2638
(KILOHERTZ)	2639
TERMINALS (NUMBERS)	2640
(WRITE-IN)	2637

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2630	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T–27.
1824	METHOD 1824 SHALL APPLY.
2631	THE AMBIENT TEMPERATURE SHALL BE NOT LESS THAN 2631 DEGREES CELSIUS.
1826	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1826 DEGREES CELSIUS.
2632	THE PULSE VOLTAGE SHALL BE 2632 VOLT(S) PEAK.
2633	THE PULSE WIDTH SHALL BE 2633 MICROSECOND(S).
2642	THE REPETITION RATE SHALL BE 2642 PULSES PER SECOND.
2635	THE ELECTRICAL LOAD SHALL BE 2635 OHM(S).
2636	TEST CURRENT SHALL BE 2636 AMPERE(S) DC.
2638	TEST FREQUENCY SHALL BE 2638 HERTZ.
2639	TEST FREQUENCY SHALL BE 2639 KILOHERTZ.
2640	TERMINAL(S) APPLICABLE TO THE TEST SHALL BE NUMBER(S) 2640.
2637	2637.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

1418 TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

11433 TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1410 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

1375 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL–STD–202.

1411 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).

1419 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

1432 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BENDS(S).

1413 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).

1420 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL–STD–202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4722~~.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
47113	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL–STD–202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
47119	MOUNTING SHALL BE IN ACCORDANCE WITH ~~4719~~.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2650
MAXIMUM TORQUE (OUNCE–INCHES)	2651
MAXIMUM TORQUE (NEWTON METERS)	2652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2655
PER MIL-I-83446.	2656
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2650 TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2650.

2651 TORQUE. THE TORQUE SHALL BE NOT GREATER THAN 2651. OUNCE–INCH(S).

2652 TORQUE. THE TORQUE SHALL BE NOT GREATER THAN 2652 NEWTON METER(S).

2655 TORQUE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2655.

2656 TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I–83446.

1455 VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.

1456 VIBRATION? HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3473 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1446 VIBRATION HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL–STD–202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
NO DISCONTINUITY DURING TEST.	1490

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1447 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.

1448 TEST CONDITION LETTER 1448 SHALL APPLY.

6200 THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.

4709 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4708 MOUNTING SHALL BE BY THE NORMAL METHOD.

4707 MOUNTING SHALL BE IN ACCORDANCE WITH 4707.

1533 THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.

1534 THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

1475 VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

1476 VIBRATION, LOW FREQUENCY THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL–STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.

1467 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL–STD-202.

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

4731 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4730 MOUNTING SHALL BE BY THE NORMAL METHOD.

4729 MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

1535 THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

1536 THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.

4979 THE DIRECTION OF MOTION-SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

4978 THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.

1537 THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
NO DISCONTINUITY.	1374
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL–STD–202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATIONS RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION? RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL–STD–202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL–STD-202, METHOD 214. (CONT)	
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	
MOUNTING HARDWARE (SEE TABLE X, DOD–STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1430 THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

1439 THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.

1462 THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

4977 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4976 MOUNTING SHALL BE BY THE NORMAL METHOD.

4975 MOUNTING SHALL BE IN ACCORDANCE WITH 49750

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL–STD–12850	7630
MIL–STD–130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 70040
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL–STD-130.

ADDITIONAL PART MARKING.

6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1579 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD–STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A273)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

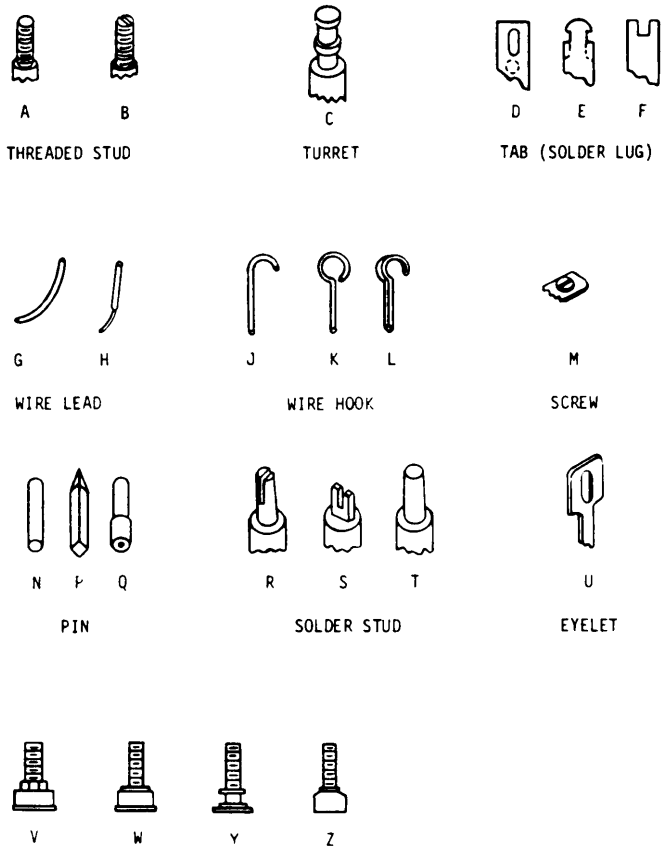


020-01-1

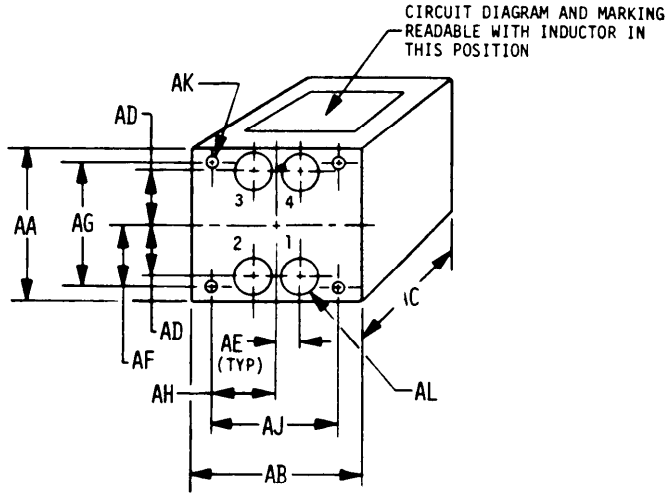


020-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

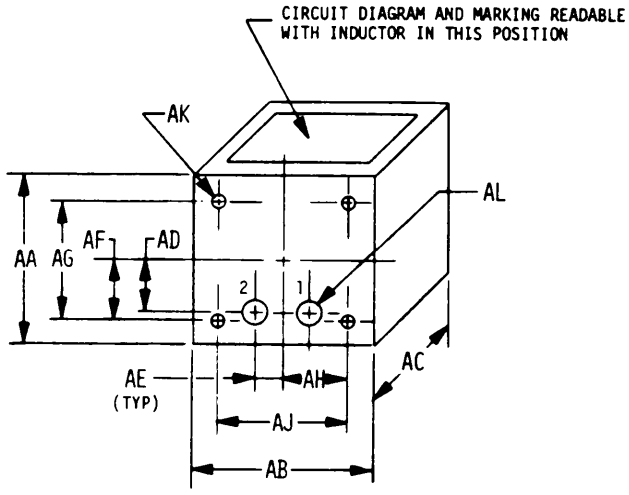



020-02-2

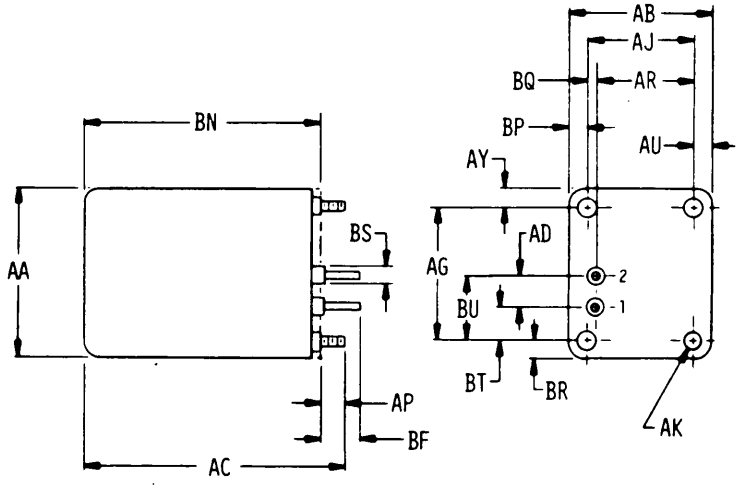


020-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

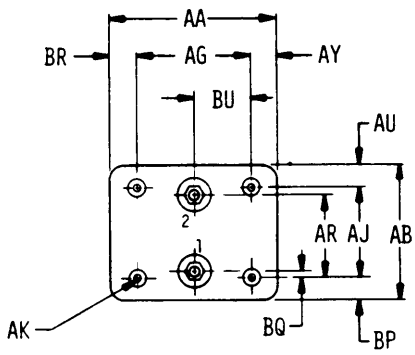

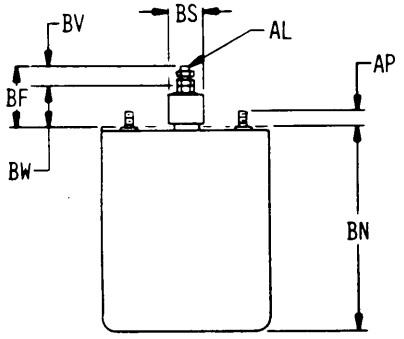


020-02-4

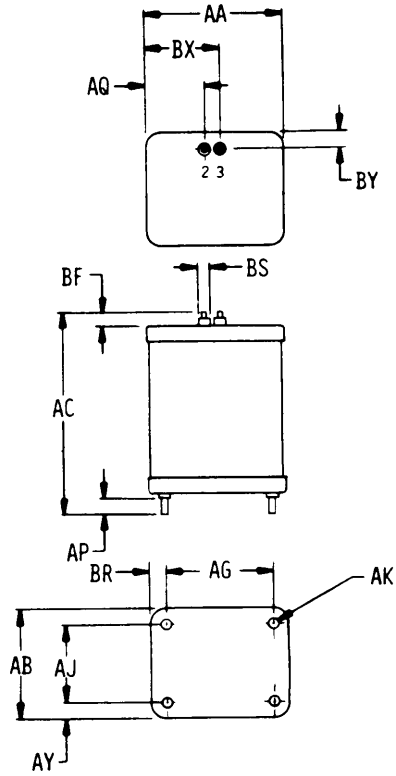


020-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

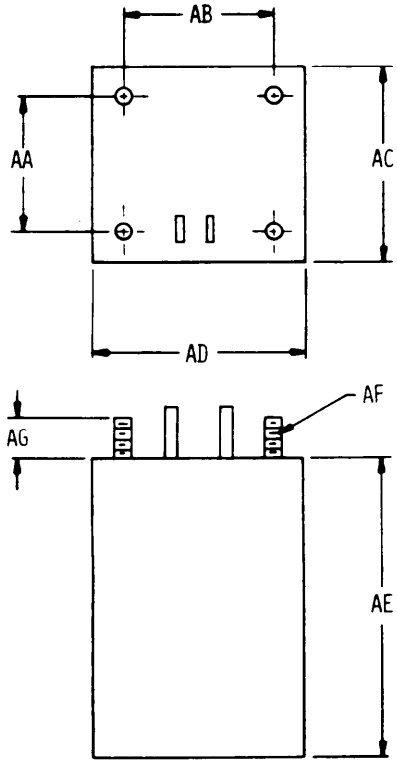


020-02-6

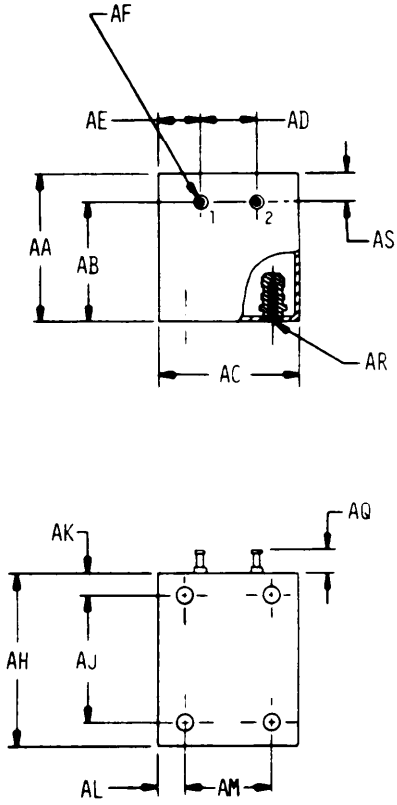


020-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

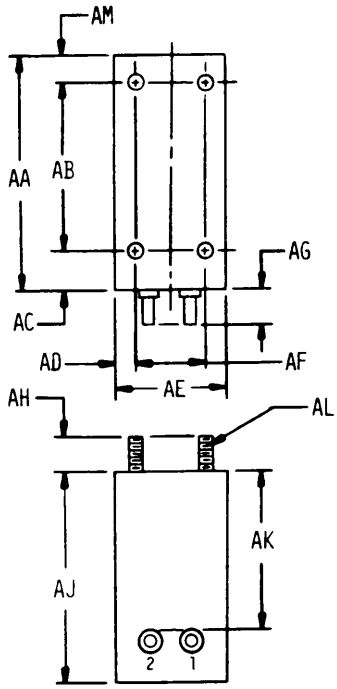


020-02-8

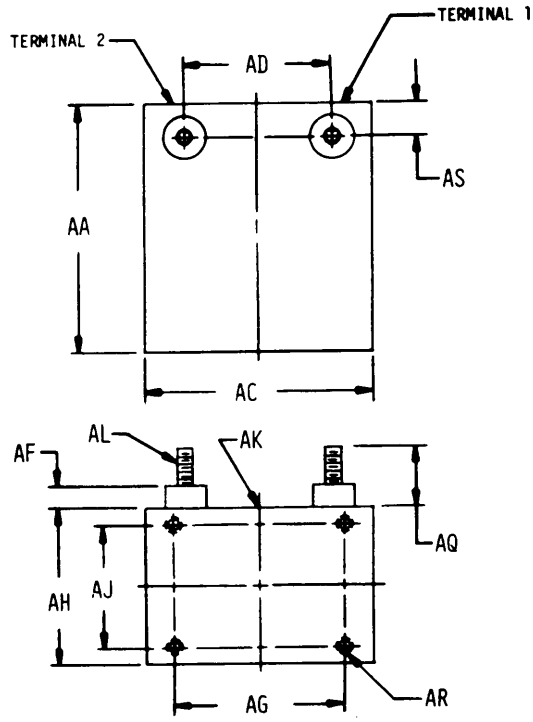


020-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

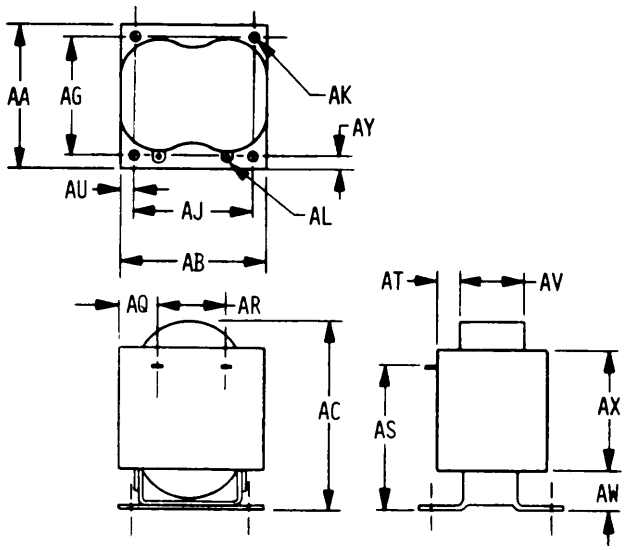


020-03-1

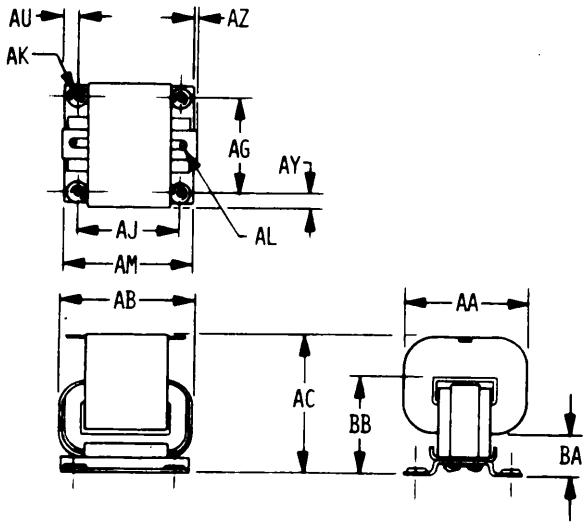


020-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

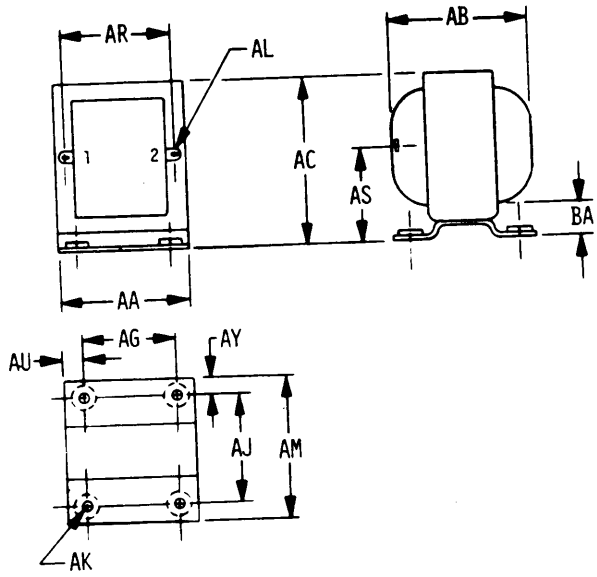


020-03-3

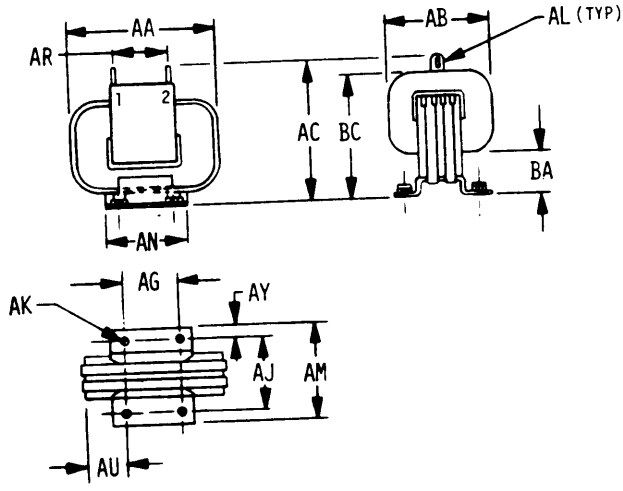


020-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

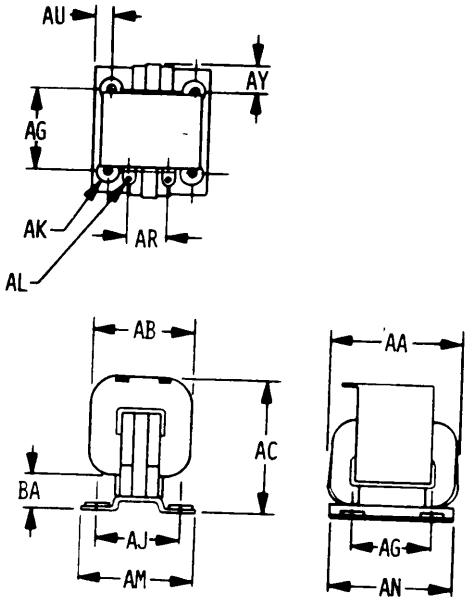


020-03-5

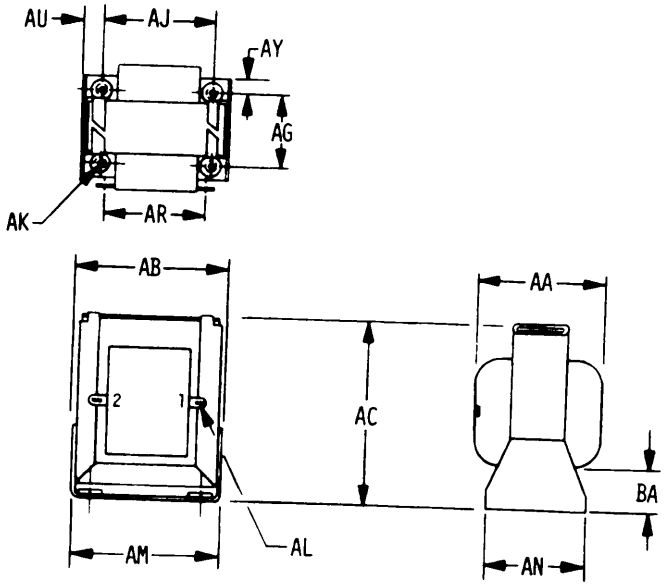


020-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

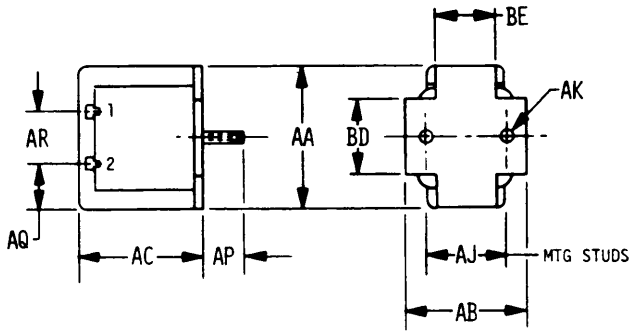


020-03-7

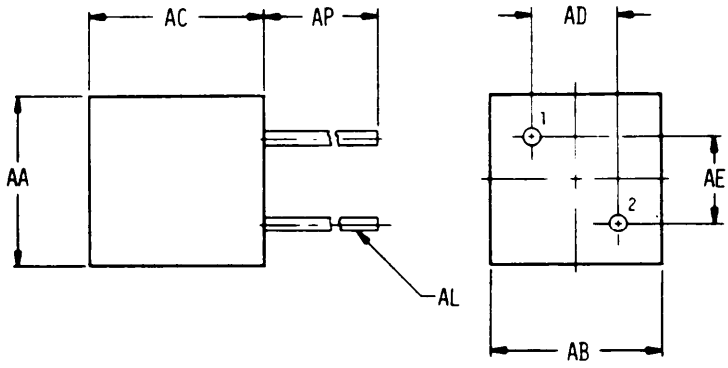


020-03-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

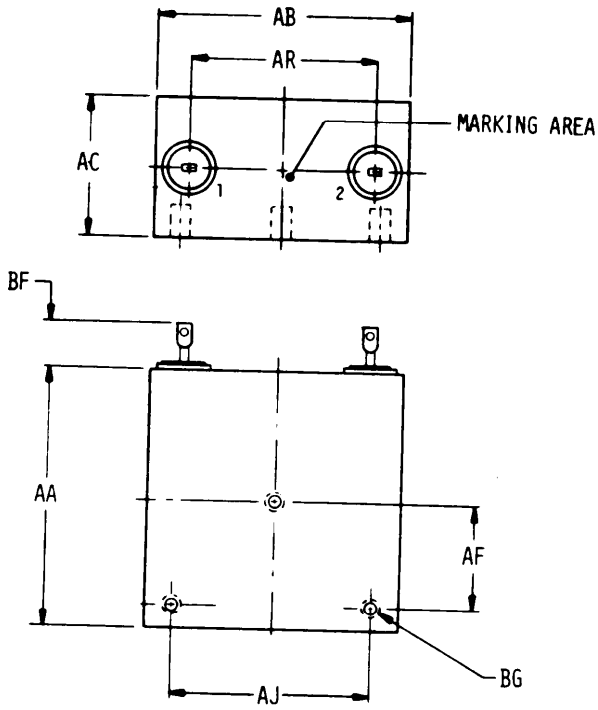


020-03-9

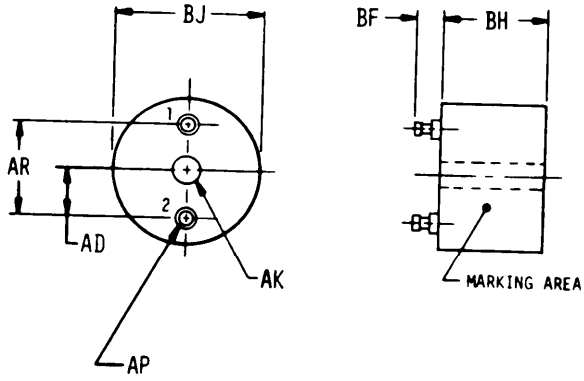


020-03-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

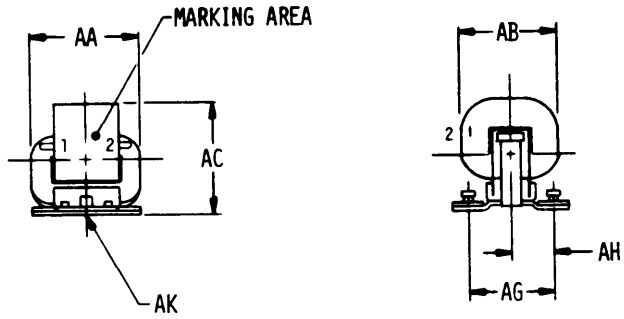

020-03-11

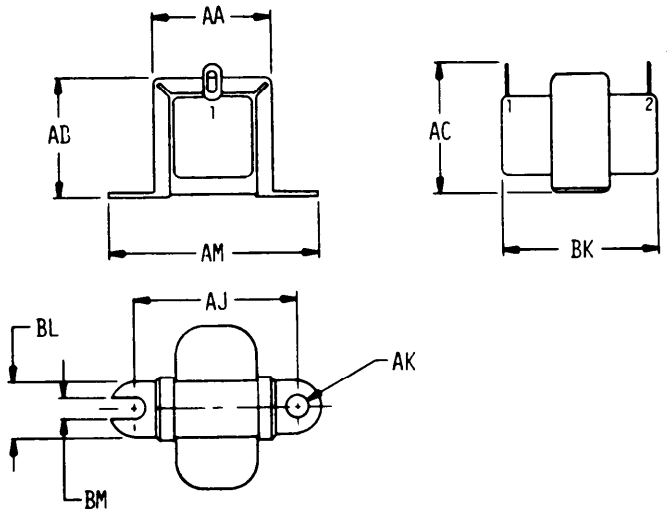


020-03-12

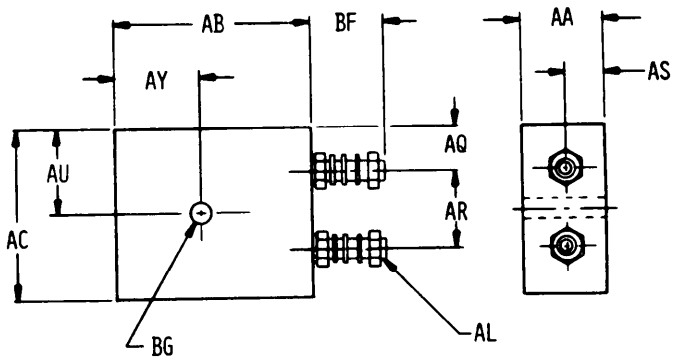


020-03-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

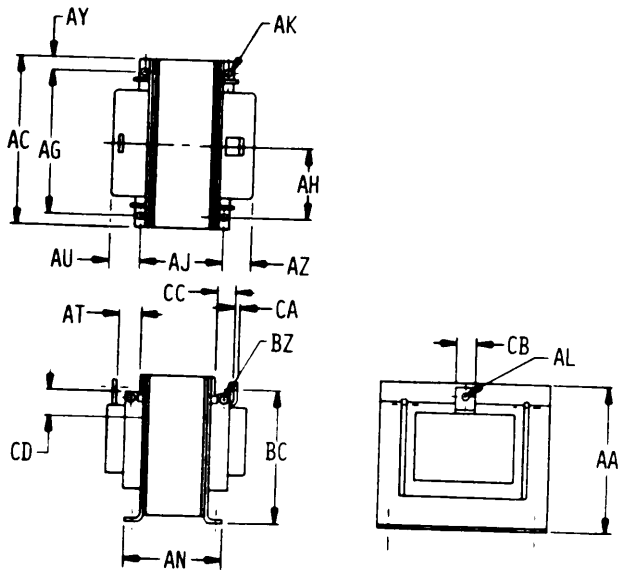


020-03-14

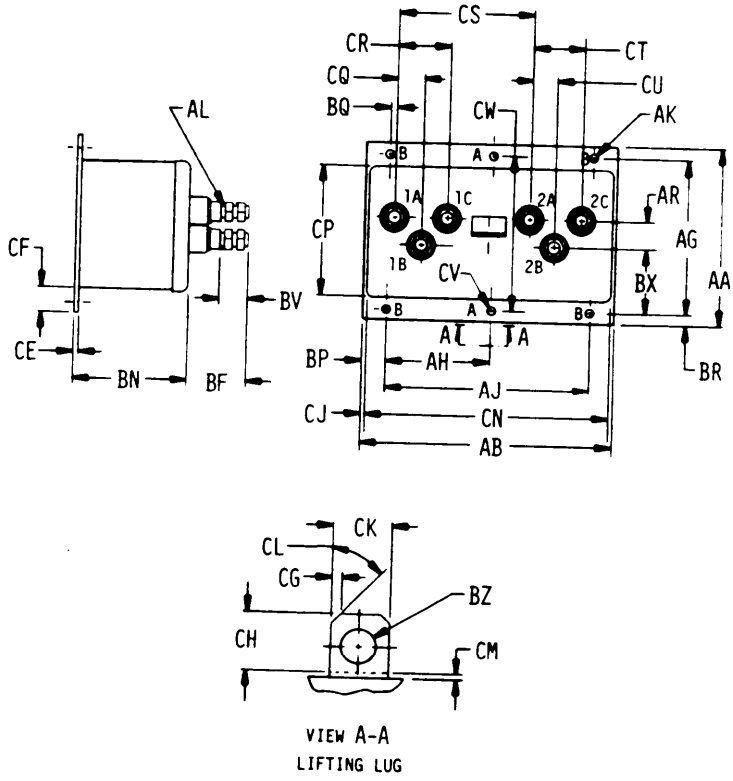


VIEW A-A
LIFTING LUG

020-03-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

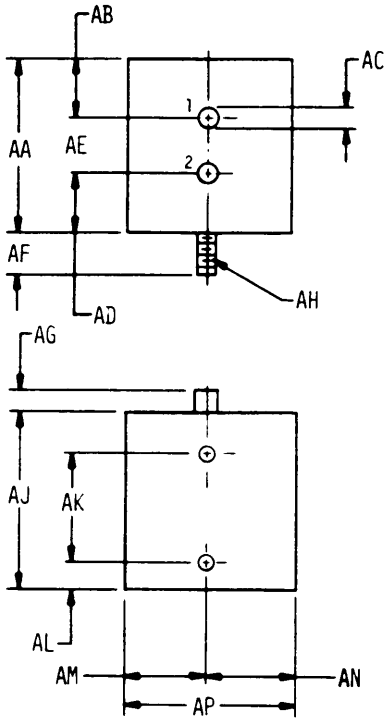

020-03-16

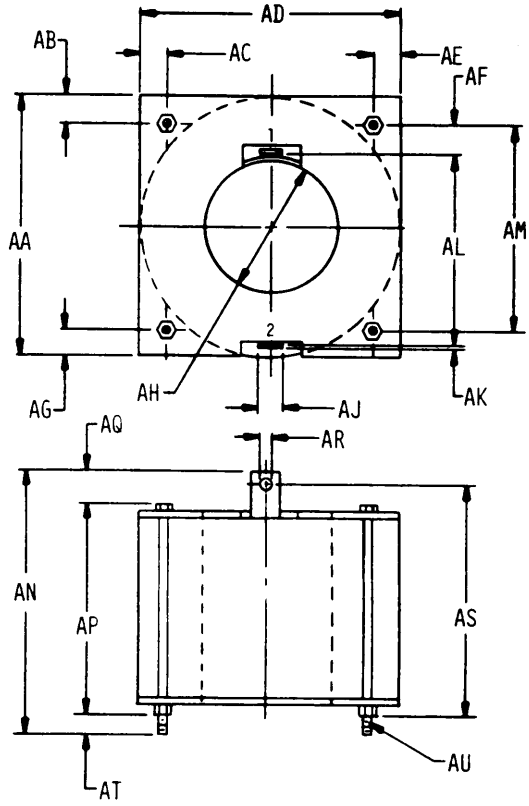


020-03-17

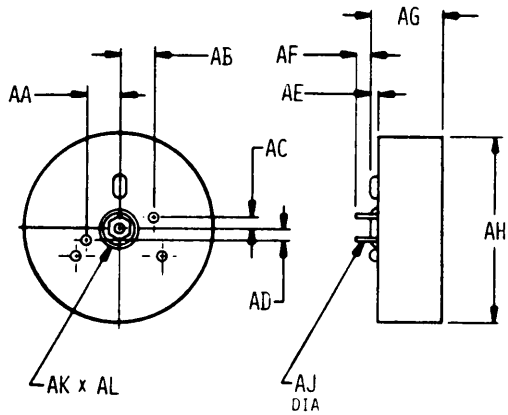


020-03-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

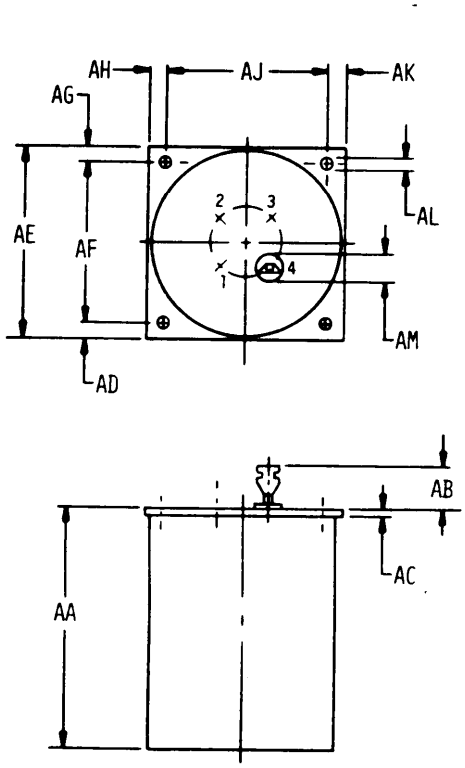


020-03-19

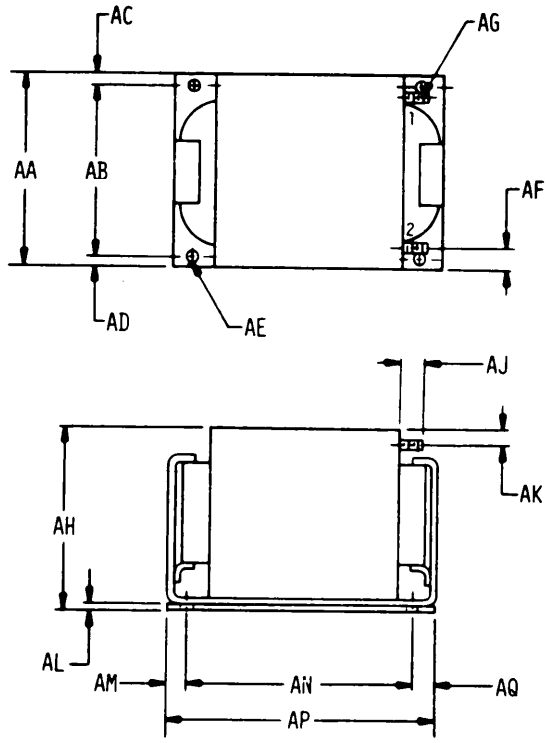


020-03-20


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

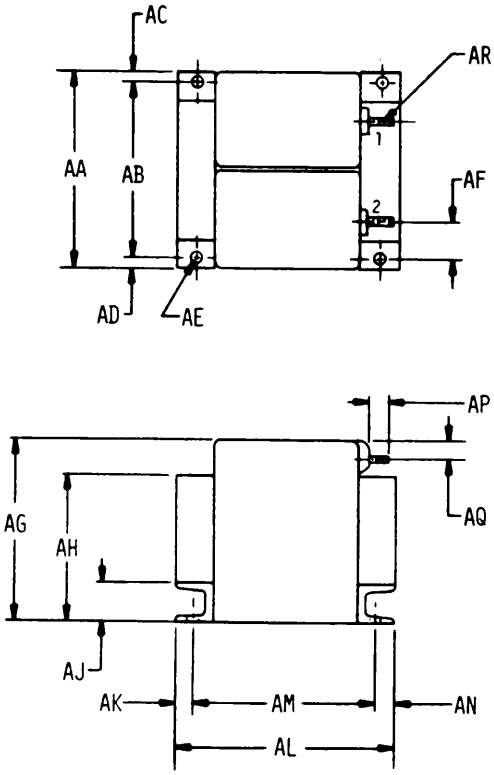


020-03-21

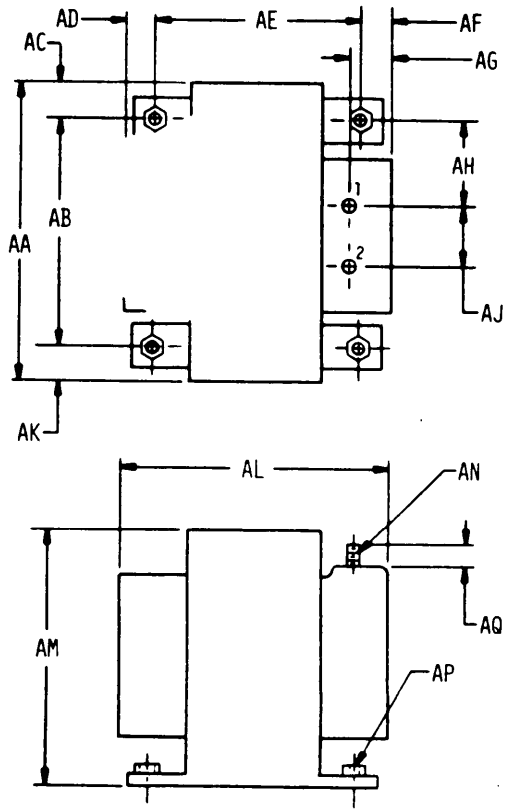

020-03-22

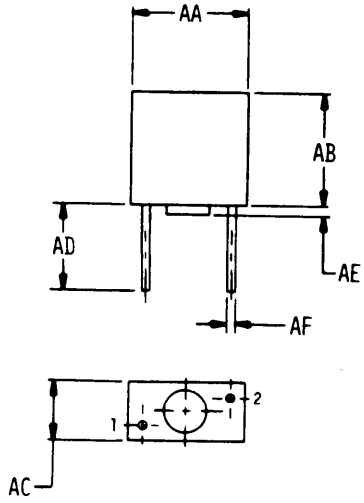


020-03-23

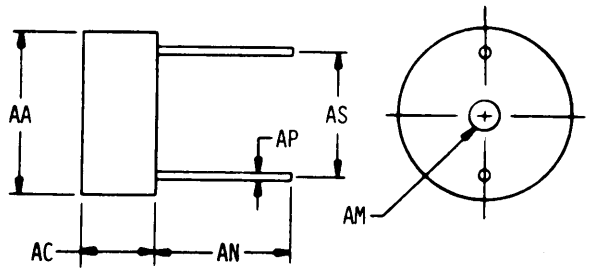


020-03-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

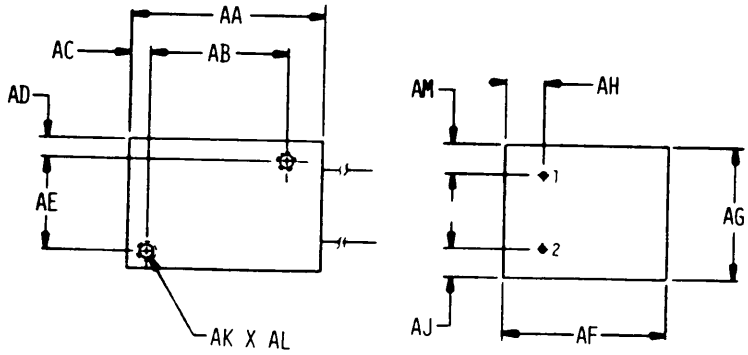


020-03-25

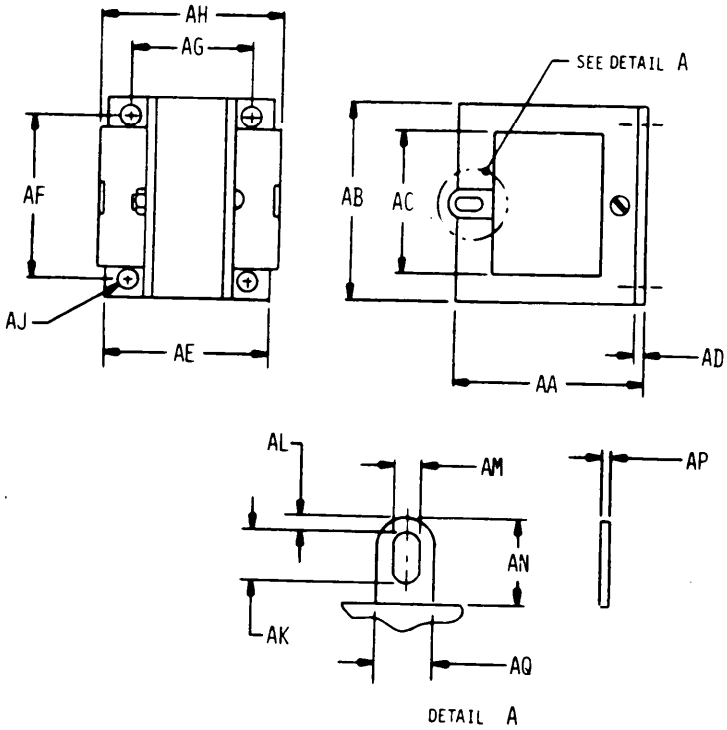


020-03-26


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

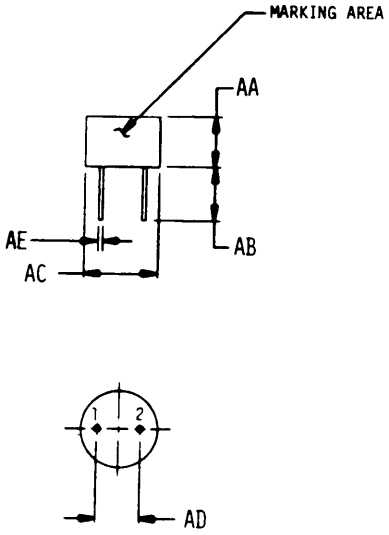


020-03-27

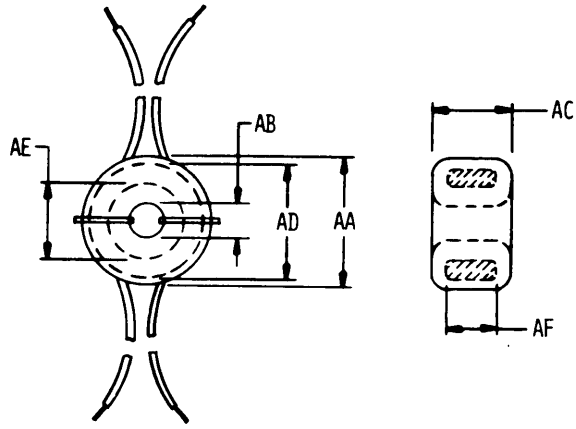

020-03-28

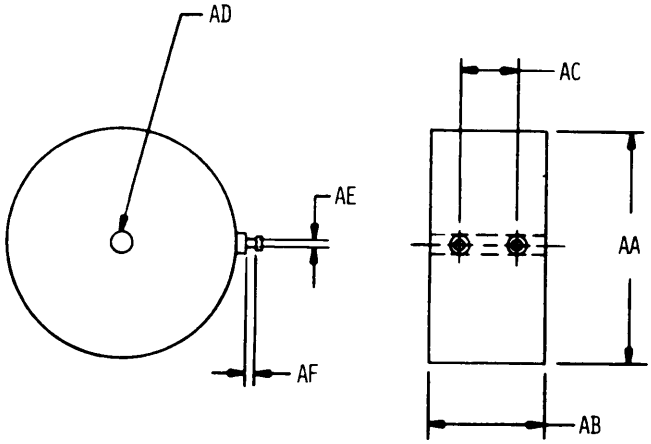


020-03-29

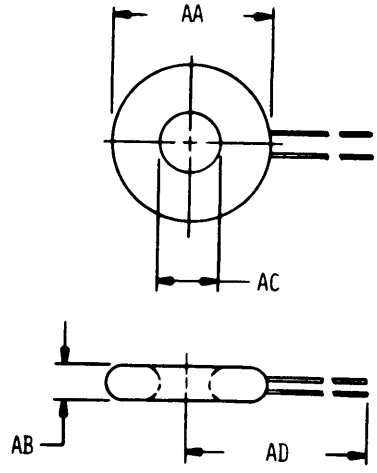


020-03-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

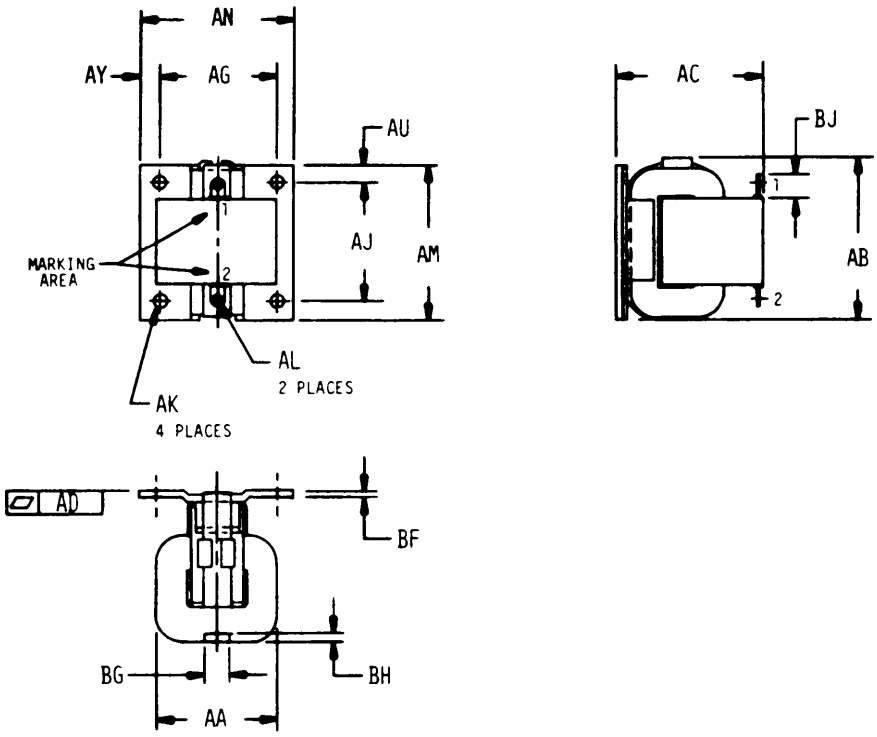


020-03-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

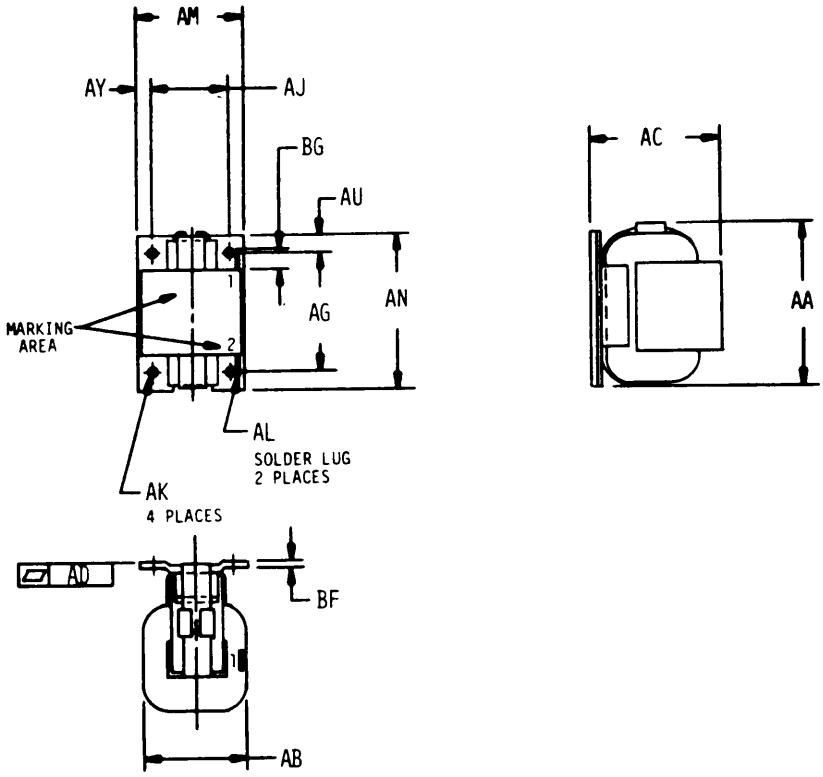


020-03-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

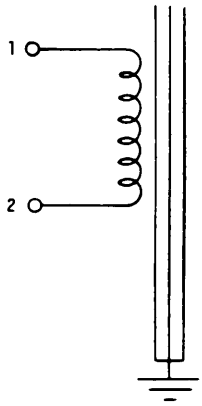


020-04-1

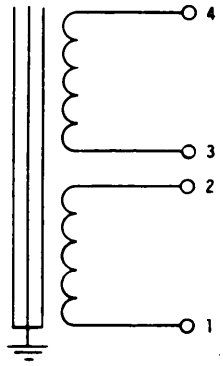

020-04-2




020-04-3

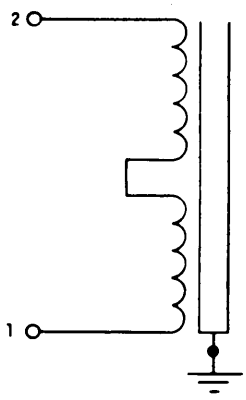

020-04-4




020-04-5




020-04-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

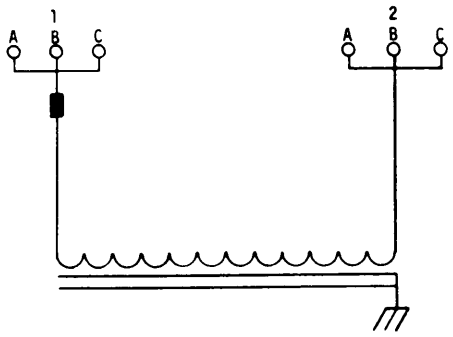


020-04-7




020-04-8




020-04-9



020-04-10

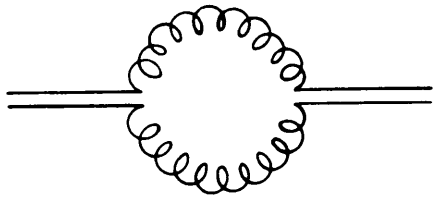


020-04-11



020-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

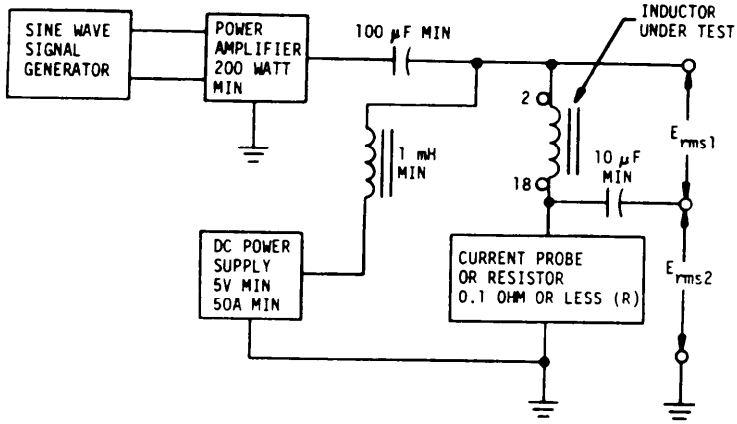

NOTES: 1. $L = \frac{E_{rms1}}{2\pi FI_{ac}}$

2. TEST EQUIPMENT EMPLOYED IS OPTIONAL.

3. E_{rms2} IS MEASURED WHEN A RESISTOR IS EMPLOYED TO DETERMINE I_{ac}:

$$I_{ac} = \frac{E_{rms2}}{R} \text{ (A rms)}$$

	(a) (1-2)	(b) (1-2)	RATED VALUE
4. E_{rms1} =	25V RMS	1.0V RMS	25V RMS
5. F =	1200 Hz	1200 Hz	1200 Hz
6. I_{dc} =	10A	50A	32A

7. 50 A CURRENTS THROUGH INDUCTOR TO BE LIMITED TO 1 MINUTE IN EACH 10 MINUTE PERIOD.

020-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1413	132	1486	122	1593	40
0102	12	1414	134	1488	124	1594	40
0103	12	1416	134	1490	138	1596	38
0104	12	1418	132	1494	122	1597	38
0105	12	1419	132	1495	122	1598	38
0107	14	1420	132	1497	86	1599	38
0108	14	1421	134	1498	86	1604	26
0700	12	1426	142	1500	124	1602	26
0800	12	1427	142	1502	124	1603	30
1003	12	1428	142	1504	124	1604	30
l004	12	1429	90	1500	124	1612	94
1005	12	1430	144	1509	124	1614	94
l006	12	1431	142	1511	84	1616	94
1008	12	1432	90	1522	86	1618	94
1009	20	1433	132	1523	86	1620	94
1371	84	1435	142	1524	86	1622	94
1373	84	1436	142	1533	138	1624	94
1374	142	1438	142	1534	138	1634	92
1375	132	1439	144	1535	140	1636	92
1376	84	1446	136	1536	140	1652	40
1377	86	1447	138	1537	140	1654	42
1378	84	1448	138	1557	34	1656	42
1380	82	1451	122	1558	34	1657	42
1384	84	1452	142	1562	16	1660	40
1386	84	1453	142	1563	16	1662	40
1387	84	1455	136	1564	16	1663	40
1388	84	1456	136	1565	16	1665	40
1391	90	1459	142	1566	16	1666	42
1394	90	1462	144	1567	16	1667	42
1395	92	1466	140	1569	26	1668	42
1396	90	1467	140	1571	26	1669	42
1397	90	1468	124	1572	26	1702	76
1398	90	1470	140	1574	26	1704	76
1400	88	1471	124	1576	20	1708	76
1404	90	1473	136	1577	26	1712	76
1406	90	1475	138	1579	26	1714	76
1407	84	1476	138	1587	40	1716	76
1410	132	1477	66	1589	40	1724	74
1411	132	1478	124	1591	40	1726	74
1412	132	1482	122	1592	44	1727	74

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1728	74	1930	62	2121	29	2163	31
1730	74	1931	62	2122	29	2164	29
1742	80	1932	62	2123	29	2166	29
1744	80	1933	62	2124	29	2167	29
1748	80	1944	58	2125	29	2168	29
1762	46	1946	60	2126	29	2169	29
1764	46	1548	60	2127	29	2170	29
1766	46	1950	60	2128	29	2171	29
1768	46	1952	60	2129	29	2172	29
1772	46	1954	60	2130	29	2173	31
1774	46	1956	60	2131	29	2174	31
1782	98	1558	60	2132	29	2175	31
1784	98	1960	60	2133	29	2176	31
1785	98	1966	58	2134	29	2177	29
1780	98	1967	58	2135	29	2179	29
1790	98	1968	58	2136	29	2180	29
1802	48	1970	50	2137	29	2181	29
1804	48	1974	56	2138	29	2182	29
1806	48	1976	58	2139	29	2183	29
1808	46	2100	29	2140	29	2184	29
1810	48	2101	29	2141	29	2185	29
1812	48	2102	29	2142	29	2186	31
1816	46	2103	29	2143	29	2187	31
1818	46	2104	29	2144	29	2188	31
1822	128	2105	29	2145	29	2189	31
1824	130	2106	29	2146	29	2198	29
1826	130	2107	29	2147	29	2192	29
1630	128	2108	29	2148	29	2193	29
1832	128	2109	29	2149	29	2194	29
1834	128	2110	29	2151	29	2195	29
1835	18	2111	29	2153	29	2196	29
1836	18	2112	29	2154	29	2197	29
1837	18	2113	29	2155	29	2198	29
1838	18	2114	29	2156	29	2199	31
1839	18	2115	29	2157	29	2200	31
1922	60	2116	29	2158	29	2201	31
1923	60	2117	29	2159	29	2202	31
1924	62	2118	29	2160	31	2203	29
1926	62	2119	29	2161	31	2205	29
1928	62	2120	29	2162	31	2206	29

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2207	29	2345	44	2442	76	2494	94
2208	29	2346	44	2443	78	2495	94
2209	29	2347	44	2444	78	2496	94
2210	29	2348	44	2448	78	2497	94
2211	29	2349	44	2449	78	2500	94
2212	31	2361	46	2450	78	2501	94
2213	31	2362	46	2451	78	2504	96
2214	31	2363	46	2452	78	2505	96
2215	31	2365	48	2453	78	2506	96
2300	36	2371	56	2454	78	2507	96
2301	36	2372	56	2455	70	2508	96
2304	36	2375	56	2456	80	2509	96
2305	36	2376	58	2458	80	2515	96
2307	36	2377	58	2459	80	2516	96
2308	38	2378	58	2462	80	2519	96
2309	38	2400	64	2464	80	2520	96
2310	38	2401	64	2466	80	2600	118
2311	38	2404	64	2467	80	2601	118
2312	38	2405	66	2468	84	2602	120
2320	42	2406	66	2469	82	2603	120
2321	42	2407	66	2470	82	2604	120
2322	42	2408	66	2471	82	2605	120
2323	42	2410	66	2472	82	2606	29
2324	42	2415	72	2473	82	2607	120
2325	42	2416	72	2474	82	2609	120
2326	42	2417	72	2475	82	2610	120
2327	42	2420	74	2476	82	2611	120
2328	42	2421	74	2477	82	2612	120
2331	44	2422	74	2480	86	2613	29
2332	44	2423	74	2481	86	2614	122
2334	44	2424	74	2483	88	2615	122
2335	44	2428	76	2484	88	2616	122
2336	44	2429	76	2485	88	2617	122
2337	44	2430	76	2486	88	2618	122
2338	44	2431	76	2487	88	2620	29
2339	44	2432	76	2488	88	2627	29
2341	44	2433	76	2489	98	2630	130
2342	44	2434	76	2490	88	2631	130
2343	44	2440	76	2491	88	2632	130
2344	44	2441	78	2493	92	2633	130

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2634	29	4662	126	4734	114	4810	72
2635	130	4663	128	4735	118	4811	72
2636	130	4664	128	4736	116	4812	72
2637	130	4665	128	4737	114	4813	68
2636	130	4666	128	4738	114	4814	72
2639	130	4667	123	4739	114	4815	66
2640	130	4669	108	4740	116	4817	54
2642	130	4671	108	4741	116	4819	70
2650	136	4672	126	4742	116	4820	70
26501	136	4674	126	4743	118	4825	70
2652	136	4675	126	4745	112	4829	110
2655	136	4677	126	4746	114	6830	110
2656	136	4683	126	4748	114	4831	110
2661	31	4684	126	4749	116	4834	110
2662	31	4685	126	4756	116	4835	110
2663	31	4686	126	4751	118	4836	110
2664	31	4689	108	4752	118	4838	110
2665	31	4691	108	4754	64	4839	110
2666	31	4692	108	4755	64	4842	54
2667	31	4694	108	4756	64	4843	100
2668	31	4695	108	4760	62	4844	56
4301	25	4698	108	4761	64	4845	56
4302	25	4700	108	4762	64	4846	56
4303	25	4701	108	4765	112	4847	54
4304	25	4707	138	4766	112	4848	54
4305	25	4708	138	4770	112	4849	50
4306	25	4709	138	4771	112	4853	68
4307	25	4713	134	4772	112	4854	54
4308	25	4714	134	4773	112	4855	54
4309	25	4715	134	4782	112	4856	52
4310	25	4717	56	4788	68	4857	100
4311	25	4718	108	4790	68	4858	100
4312	25	4719	134	4793	68	4861	54
4313	25	4722	134	4794	68	4862	54
4314	25	4723	134	4795	66	4663	34
4315	25	4726	134	4790	66	4864	34
4316	25	4729	140	4799	66	4665	34
4317	25	4730	140	4803	68	4866	70
4318	25	4731	140	4805	68	4867	56
4319	25	4732	114	4809	72	4868	34

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4669	56	4991	92	6293	52	6922	106
4870	56	5052	18	6294	52	6923	106
4874	52	5054	18	6300	50	6929	104
4875	54	5060	16	6308	52	6930	104
4878	112	5061	16	6310	52	6937	104
4884	50	5062	16	6311	50	6939	106
4885	50	5063	16	6312	50	6941	14
4886	50	5068	18	6328	114	6942	14
4890	68	5069	18	6321	114	6991	146
4891	52	5297	102	6322	114	6992	146
4892	34	6200	138	6323	l16	6993	146
4893	34	6202	70	6324	l16	6994	146
4894	48	6203	124	6325	116	6995	146
4896	48	6204	126	6326	l16	700l	146
4897	56	6205	128	6328	l16	7002	146
4900	52	6206	70	6329	118	7003	146
4901	50	6207	70	6330	118	7004	146
4902	52	6210	36	6331	118	7005	146
4906	48	6226	34	6332	118	7021	32
4908	48	6233	34	6333	118	7022	32
4950	20	6239	34	6359	82	7023	32
4963	104	6250	32	6369	12	7024	32
4967	102	6251	34	6370	112	7301	20
4968	102	6263	36	6371	98	7302	20
4969	70	6264	36	6372	146	7345	32
4970	70	6265	36	6696	104	7572	20
4971	70	6266	36	6697	104	7577	20
4972	104	6272	32	6698	106	7580	22
4975	144	6273	32	6699	106	7627	18
4976	144	6279	110	6700	106	7629	146
4977	144	6282	l00	6701	106	7630	146
4978	140	6283	102	6706	106	7641	18
4979	140	6284	l02	6707	106		
4980	92	6285	100	6710	106		
4981	92	6286	l00	6713	106		
4983	92	6287	100	6878	144		
4984	92	6288	100	6873	12		
4985	92	6289	100	6874	14		
4986	92	6291	98	6920	106		
4989	100	6292	50	6921	106		

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	32
Additional Part Marking	146
Additional Requirements	146
Adhesion	36
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	148
Base Document	12
Capacitance	38
City, State, Zip	12
Classification	16
Color Coding of Wire Lead Terminals	24
Company Name/Command	12
Configuration	20
Construction	26
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Core	26
Corona Discharge	40
Coupling Among Units	46
Date	12
DC Resistance	46
Definition of Hermetic Sealing	148
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	48
Dielectric Withstanding Voltage at Sea Level	52
Duty Cycle	26
Effective Parallel Resistance	56
Electrical Characteristics	28
Explosion	58
Finishes	22
Flammability	58
Format	12
Frequency Rating	18
Fungus	62
Government Design Activity FSCM	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
High Temperature Exposure	64
Humidity	66
Illustrations	20
Immersion	70
Incremental Current Inductance Reduction	72
Induced Voltage, Reduced Barometric Pressure	74
Induced Voltage, Sea Level	76
Inductance	80
Insulation Resistance	82
Life Expectancy Rating	18
Low Temperature Operation	86
Magnetizing Current	30
Materials	22
Metals	22
Moisture Resistance	88
Mounting Hardware	144
Nomenclature	148
Notes	148
Overload	92
Packaging	148
Part Marking	146
Part Number	14
Part Number Cross-Reference	148
Percent Coupling	94
Performance Characteristics	144
Permeability, Magnetic	96
Phase Shift	30
Phone Number	12
Quality Assurance Provisions	148
Quality Factor (Q)	98
Radiographic	98
Random Drop	102
Ratings	16
Reliability Screening	104
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	108
Resistance to Solvents	110

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Resonance Rating	18
Revision of AEDPS Document (Number)	14
Salt Spray	112
Scope	14
Seal	112
Self-Resonant Frequency	118
Shock, High Impact	122
Shock, Specified Pulse	124
Solderability	126
Source Table	14
Street/Building	12
Superseded Document	148
System Application	12
Tabulated Characteristics	22
Temperature Rating	18
Temperature Rise	128
Terminal Strength	132
Thermal Shock (Temperature Cycling)	134
Torque	136
Units of Measure	14, 20
Vibration, High Frequency	136
Vibration, Low Frequency	138
Vibration, Random	142
Volt Ampere Rating	20
Weight	32
Workmanship	144

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-37A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST Help Desk at 215-697-6396 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 79 LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

DOD-STD-35 170378

185/186


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-37A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

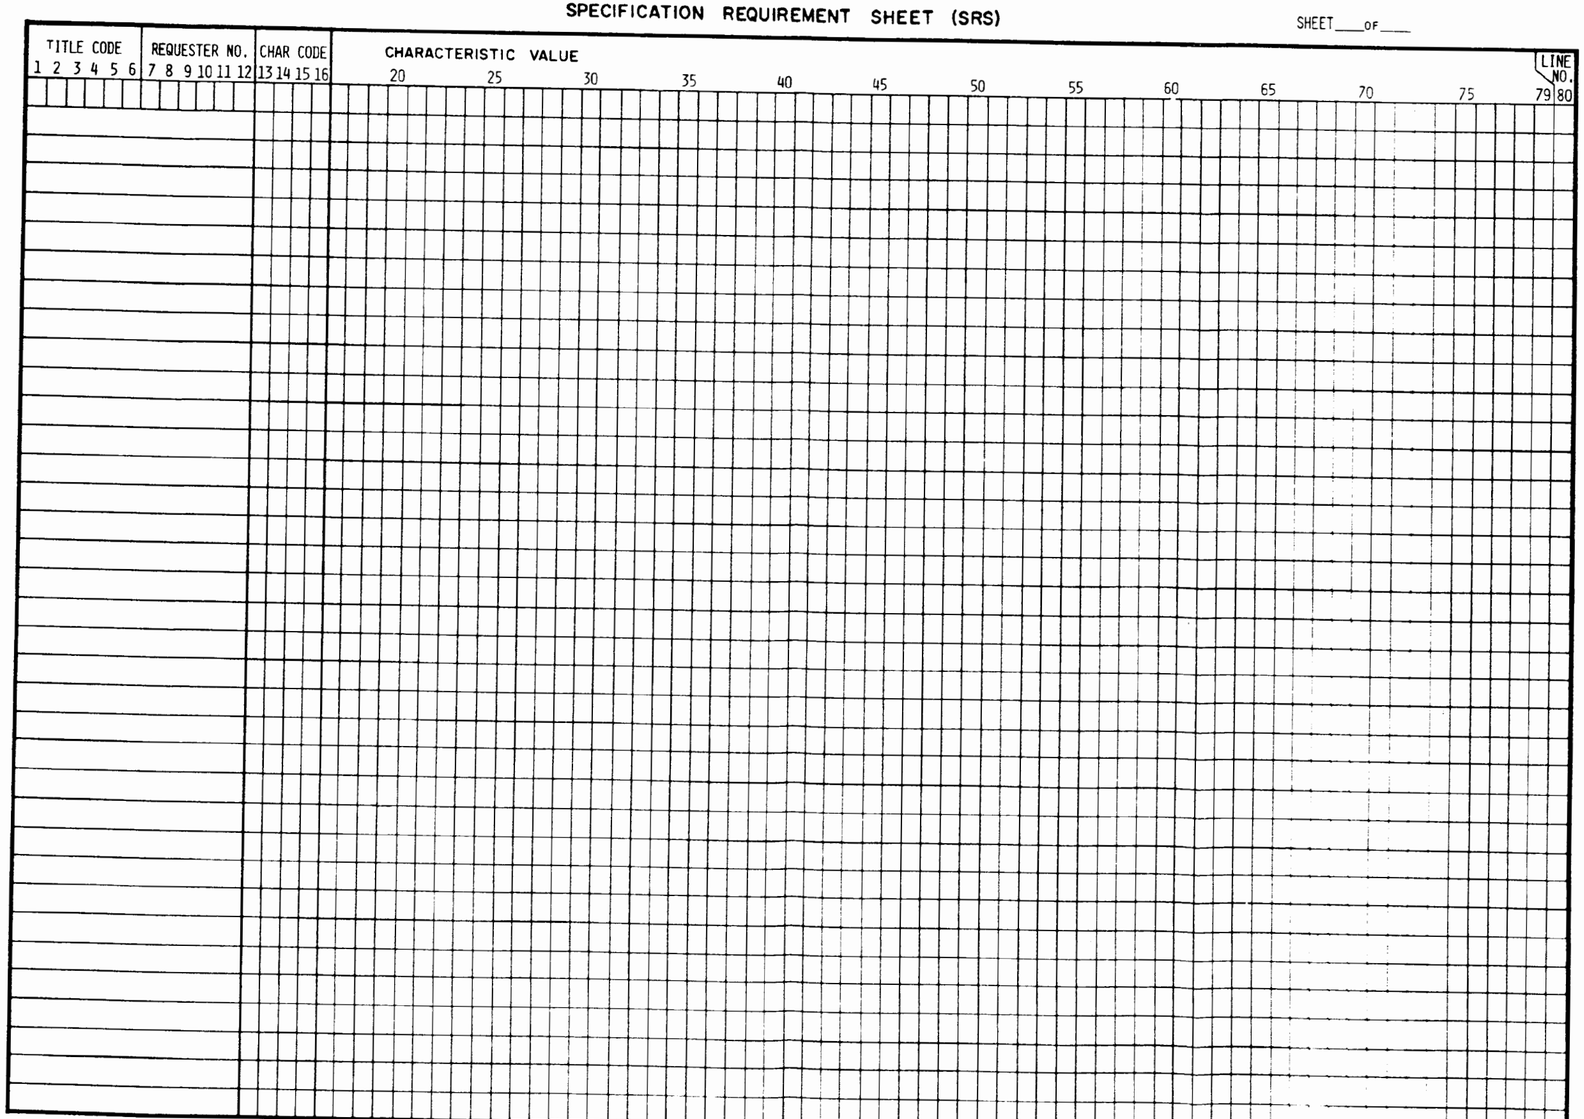

XX-ATD-35 L-0277

183,124

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

LD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
ALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

LD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.