MILITARY SPECIFICATION

COMPUTER, RANGE CP-888/VPS-2: 10548339

1. SCOPE

1.1 This specification covers the Computer, Range CP-888/VPS-2, hereinafter called the computer. The computer is part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-46357	Computer, Gun Direction; M18 Manufacturing Processes and Inspection of
MIL-P-50317A	Protector, Over Voltage: 10548031 (+5 Volt Filter)
MIL-R-50318A	Regulator, Voltage: 10548034
MIL-R-50319A	Regulator, Voltage: 10548043
MIL-G-50322A	Generator, Digital: 10548613

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

MIL-C-50344A	Counter, Electronic: 10548009
MIL-C-50652/1	Modulator Trigger Generator: 10548018
MIL-C-50652/2	Computer Timing Generator: 10548007
MIL-C-50652/3	RCFD Decoder: 10548119
MIL-C-50652/4	Range Counter: 10548046
MIL-C-50652/5	RCFD Generator: 10548016
MIL-C-50652/6	Range Register A: 10548122
MIL-C-50652/7	Range Register B: 10548021
MIL-C-50652/8	Search Track and Gain Control: 10548148
MIL-C-50652/9	Range Rate Counter A: 10548125
MIL-C-50652/10	Range Rate Counter B: 10548012
MIL-C-50652/11	Rate Scaler: 10548049
MIL-C-50652/12	Rate Integrator: 10548086
MIL-C-50652/13	Phase Detector: 10548133
MIL-C-50652/14	Range D/A Converter: 10548359
MIL-C-50652/15	Range Rate D/A Converter: 10548330
MIL-C-50652/16	Control Amplifier: 10548450
MIL-C-50652/17	Fine/Fine Delay: 10548638
MIL-C-50652/18	Universal Board: 10549234

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U. S. Army, Frankford Arsenal

F10548339	Computer, Range CP-888/VPS-2

PACKAGING DATA SHEET

10548339	Packaging of Computer, Range CP-888/VPS-2

(Copies of specifications, standards, drawings and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. - The computer shall be manufactured in accordance with Drawing F10548339 and drawings pertaining thereto. The subassemblies of the computer shall have been inspected and accepted in accordance with their respective drawings or specifications prior to their installation in the computer. The following subassemblies are covered by the indicated specifications:

UNIT NO.	NAME	SPECIFICATION
A1	Generator Digitial: 10548613	MIL-G-50322A
A2	Counter Electronic: 10548009	MIL-C-50344A
A3	Modulator Trigger Generator: 10548018	MIL-C-50652/1
A4	Computer Timing Generator: 10548007	MIL-C-50652/2
A5	RCFD Decoder: 10548119	MIL-C-50652/3
A6	Range Counter: 10548046	MIL-C-50652/4
A7	RCFD Generator: 10548016	MIL-C-50652/5
A8	Range Register A: 10548122	MIL-C-50652/6
A9	Range RegisterB: 10548021	MIL-C-50652/7
A10	Search, Track and Gain Control: 10548148	MIL-C-50652/8
A11	Range Rate Counter A: 10548125	MIL-C-50652/9
A12	Range Rate Counter B: 10548012	MIL-C-50652/10
A13	Rate Scaler: 10548049	MIL-C-50652/11
A14	Rate Integrator: 10548086	MIL-C-50652/12
A15	Phase Detector: 10548133	MIL-C-50652/13
A16	Range D/A Converter: 10548359	MIL-C-50652/14
A17	Range Rate D/A Converter: 10548330	MIL-C-50652/15
A18	Protector, Overvoltage: 10548031 (+5 volt filter).	MIL-F-50317A
A19	Regulator,Voltage: 10548034	MIL-R-50318A
A20	Regulator, Voltage: 10548043	MIL-R-50319A
A21	Control Amplifier: 10548450	MIL-C-50652/16
A22	Fine/Fine Delay: 10548638	MIL-C-50652/17
A23	Universal Board: 10549234	MIL-C-50652/18

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

3.2 General specifications. - Where applicable, the computer shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishings
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.2.2 MIL-C-46357.

a. Etched circuit assemblies
b. Wiring
c. Threaded fasteners
d. Marking
e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. - The computer shall be mounted on the vibration table in normal service position. The computer shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 55 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. - The computer shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 ±1 milliseconds (ms). The G value of each impulse shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. - The computer shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

3.3.3.2 Nonoperating. - The computer shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

3.3.4.1 Operating. - The computer shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40° F and +155° F.

3.3.4.2 Nonoperating (storage). - The computer shall not suffer permanent damage when subjected to not less than 4 hours at each temperature extreme of -65° F and +160° F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). - The computer shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity of 95 ±5 percent for a period of not less than 10 days.

3.4 Electrical. - Each conductor shall be electrically continuous as specified on the schematic diagram of the range computer.

3.5 Performance. - For the requirements of 3.5.1 through 3.5.26 the following conditions shall apply:

a. Logic 0: 0.0 ±0.5 volts dc (Vdc) level.
b. Logic 1: +3.5 ±1.0, Vdc level.
c. Positive pulse: a change in dc level from 0.0 ±0.5 V to +3.5 ±1.0 V and return to 0 V.
d. Negative pulse: a change in dc level from +3.5 ±1.0 V to 0.0 ±0.5 V and return to +3.5 V.
e. Switch 4S2 (Mode): in test position.
f. Switch 4S3 (Accel.): in negative position.
g. Switch 4S4 (Return): in no target position.
h. Switch 4S5 (Range): in run position.
i. Switch 4S6 (Rate): in normal position.
j. Delays in signals when specified shall be from the leading edges of each signal.
k. All pulse widths are specified at the 50 percent points.

3.5.1 Voltage inputs and distribution. - With the input voltages applied as specified in Table I, the internal voltages for distribution to the assemblies in the computers shall be as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE I. - INPUT VOLTAGES

INPUT VOLTAGE (Vdc)	CHARACTERISTICS (Vdc)	TERMINALS
-33	-33.00 ±0.25	J1-a(-), J1-b(ret)
+33	+33.00 ±0.25	J1-Y(+), J1-Z(ret)
-23	-23.00 ±0.25	J1-j(-), J1-c(ret)
+23	+23.00 ±0.25	J1-h(+), J1-c(ret)
+6.2	+6.20 ±0.50	J1-e(+), J1-g(ret) J1-d(+), J1-f(ret)
+24	+24.0 ±0.5	J1-T(+), J1-U(Ret)

TABLE II. - DISTRIBUTED VOLTAGES

VOLTAGE (Vdc)	CHARACTERISTICS (Vdc)	TERMINAL TEST POINT
-25	-25.0 ±0.5	E1(-), E2(ret)
+25	+25.0 ±0.5	E3(+), E4(ret)
-23	-15.0 ±0.5	E5(-), E6(ret)
+23	+15.0 ±0.5	E8(+), E7(ret)
+5	+5.0 ±0.5	E9(+), E10(Ret) W1(+), W2(ret)

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.2 Mid range lamp, 4DS1. - With voltages applied as specified in Table I and no input signals applied, the mid range lamp 4DS1 shall be dimly lit.

3.5.3 Mid range switch, 4S1. - With +24 Vdc applied to 4J1-T and with "PRESS TO TEST" switch 4S1 depressed, there shall be +24 Vdc present at 4J1-R and 4J3-C.

3.5.4 7.5 MHz clock output. - With a 60.0 ±5.0 megahertz (MHz) having an amplitude between the limits of 2.5 to 4 V peak-to-peak applied to J4-A, a 7.5 ±0.6 MHz clock signal shall be present at TP38 on the computer. The clock signal shall have a period of 133 ±10 nonoseconds (ns) with an amplitude of 4.0 V peak-to-peak or greater.

3.5.5 $\overline{\text{PRF RESET}}$ signal. - The $\overline{\text{PRF RESET}}$ signal at TP20 shall be a negative pulse, 67 ±25 ns wide, occuring every 50 ±5 microseconds (μs).

3.5.6 $\overline{\text{PRF}}$ signal. - The $\overline{\text{PRF}}$ signal at TP19 shall be a negative pulse having the same characteristics as specified in 3.5.5.

3.5.7 $\overline{\text{PRF CAL}}$ signal. - With 4S1, mid range C-1 switch, depressed, the $\overline{\text{PRF CAL}}$ signal at TP19 shall be two negative pulses. Each pulse shall be 67 ±25 ns from each other. The first pulse shall be delayed 16 ±2 μs from the signal specified in 3.5.5.

3.5.8 $\overline{\text{PRF}}$ signal. - The $\overline{\text{PRF}}$ signal at TP31 shall be a negative pulse, 0.6 ±0.1 μs wide, occuring every 50 ±5 μs. With switch 4S1 depressed the negative pulse at TP31 shall be 0.8 ±0.1 μs wide, occuring every 50 ±5 μs, and be delayed 16 ±2 μs from the signal specified in 3.5.5.

3.5.9 $\overline{\text{T1}}$ signal. - The $\overline{\text{T1}}$ signal at TP21 shall be a positive pulse, 0.75 ±0.10 μs wide occuring every 50 ±5 μs, and be delayed 34 ±4 μs from the signal specified in 3.5.5.

3.5.10 MOD T_o trigger signal. - The MOD T_o trigger signal at TP45 and 4J4-E shall be a positive pulse of not less than 15 V in amplitude and having a maximum rise time, to the 10 V amplitude point, of 100 ns. The signal at TP45 shall be delayed 150 ±30 ns from the signal specified in 3.5.8. The signal shall show no changes when switch 4S1 is depressed.

3.5.11 T2 signal. - The T2 signal at TP34 shall be as specified in 3.5.9 except the delay shall be 1.0 ±0.1 μs from the T1 signal specified 3.5.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.12 T3 signal. - The T3 signal at TP23 shall be as specified in 3.5.8 except the delay shall be 1.0 ±0.1 μs from the T2 signal specified in 3.5.11.

3.5.13 $\overline{\text{T11}}$ signal. - The $\overline{\text{T11}}$ signal at TP32 shall be a negative pulse, 0.75 ±0.10 μs wide occuring every 50 ±5 μs, and delayed 43 ±3 μs from the PRF RESET signal specified in 3.5.5.

3.5.14 $\overline{\text{T1/250}}$ signal. - The T1/250 signal at TP9 shall be a complementary pulse (negative pulse) to the T1 signal as specified in 3.5.9 except they shall occur every 4.0 ±0.5 ms.

3.5.15 $\overline{\text{T3/4KC}}$ signal. - The $\overline{\text{T3/4KC}}$ signal at TP10 shall be a complementary pulse to the T3 signal as specified in 3.5.12 except they shall occur every 250 ±25 μs.

3.5.16 $\overline{\text{200M}}$ signal. - With switch 4S4 in the target position, the $\overline{\text{200M}}$ signal at TP11 shall be a logic 1 level. With switch 4S4 in the target position and 24 Vdc applied between 4J1-G(+) and 4J1-H(return), the $\overline{\text{200M}}$ signal at TP11 shall be a logic 0 level.

3.5.17 T3 → T10 serial and R serial signals. - With the switches 4S2 through 4S6 sequentially placed as specified in Table III, the T3 T10 serial and R serial signals at TP17 and TP18 shall be as specified in Table III. Signal waveform characteristics are shown in Figure 1. When going from step 1 to step 2 of Table III and the signal at TP18, shown in Figure 18, changes to that shown in Figure 1C, all eight time slots of the signal shall be counting, i.3., no pulses shall remain always present or always missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE III. - PLACEMENT OF SWITCHES

STEP	4S2 MODE	4S3 ACCEL	4S4 RETURN	4S5 RANGE	4S6 RATE	SIGNAL CHARACTERISTICS TP17	SIGNAL CHARACTERISTICS TP18
1	Test	Pos.	Tgt.	Run	Normal	Fig. 1a	Fig. 1b
2	Test	Neg.	Tgt.	Run	Normal	Fig. 1a	Fig. 1c
3	Test	Pos.	Tgt.	Run	Reset	Fig. 1a	Logic 0
4	Test	Neg.	Tgt.	Run	Reset	Fig. 1a	Logic 0
5	Test	Pos.	No tgt.	Run	Normal	Fig. 1a	Logic 0
6	Test	Neg.	No tgt.	Run	Normal	Fig. 1a	Logic 0

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T20:34Z
Check the source to verify that this is the current version before use.

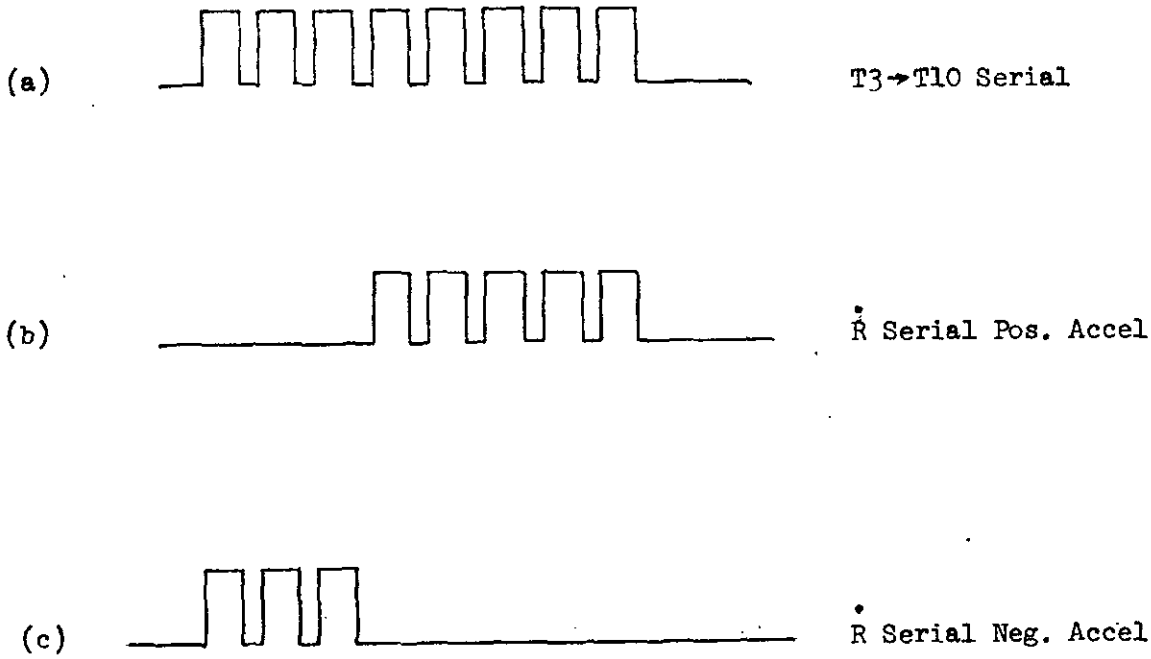


FIGURE 1. T3 → T10 AND R SERIAL SIGNALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.18 TRACK signal.

3.5.18.1 No target condition. - With switches 4S2 through 4S6 placed in positions as specified in 3.5, the TRACK signal at TP15 and TP24 shall be a logic 0 level.

3.5.18.2 Target condition. - When switch 4S4 is changed from the no target position to the target position, the TRACK signal at TP15 and TP24 shall change from a logic 0 level to a logic 1 level.

3.5.18.3 Target fade (short term). - When switch 4S4 is changed from the target position to the no target position, the TRACK signal at TP15 and TP24 shall change from a logic 1 level to a logic 0 level after 1.00 ±0.20 seconds (s).

3.5.18.4 Target fade (long term). - When switch 4S6 is place in the reset position and simultaneously switch 4S4 is changed from the target position to the no target position, the TRACK signal at TP15 and TP24 shall change from a logic 1 level to a logic 0 level after 3.00 ±0.25 s.

3.5.18.5 Target lock-on signal. - When switch 4S4 is changed from the no target position to the target position, the target lock-on signal between 4J5-C(signal) and 4J-D(signal return) shall change from a logic 1 level to a logic 0 level.

3.5.19 MID RANGE lanp 4DS1. - The mid range lamp 4DS1 shall be flashing brightly at 1-second intervals.

3.5.20 E/L COURSE signal. - The E/L COURSE signal at TP33 shall be a single positive-going step function, whose leading edge moves from less than 2.0 μs to 33 ±3 μs, with respect to the $\overline{\text{PRF}}$ signal at TP31, at 1-second intervals.

3.5.21 PRE RANGE trigger. - The PRE RANGE trigger signal at TP36 and 4J4-B shall be a single positive-going step function whose leading edge moves in synchronization with, and less than 2 μs behind, the E/L COARSE signal at TP33.

3.5.22 E/L TRIGGER.

3.5.22.1 E/L TRIGGER characteristics. - The E/L trigger signals shall be present at TP43, TP44, and 4J4-D, and have the characteristics as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the currentversion before use.

TABLE IV. - E/L TRIGGER CHARACTERISTICS

TERMINAL	
TP43	Positive pulse 0.4 to 1.5 μs wide, and move from a delay of less than 2 μs to a delay of 33 ±3 μs with respect to signal at TP31.
TP44	Positive pulse 0.2 to 0.6 μs wide, and move with the same delays as specified for TP43.
4J4-D	Positive pulse with the same characteristics as signal at TP44 except delayed by 1.0 ±0.3 μs from signal at TP44.

3.5.22.2 E/L TRIGGER movements. - When the switches 4S3 through 4S6 are sequentially positioned as specified in Table V, the E/L trigger signals at TP43 and TP44 shall have the characteristics as specified in Table IV except the direction and times of movement shall be as specified in Table V.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE V. - E/L TRIGGER MOVEMENT

	SWITCH POSITIONS				SIGNAL CHARACTERISTICS
STEP	4S3	4S4	4S5	4S6	TP43, TP44
1	Run	Neg.	No tgt.	Normal	Left to right motion at 1 s rate.
2	Freeze	Neg.	No tgt.	Normal	No motion.
3	Freeze	Pos.	Tgt.	Normal	No motion.
4	Run	Pos.	Tgt.	Normal	Left to right motion at a 17 ±1 s rate.
5	Run	Toggle	Tgt.	Normal	Right to left motion at a 17 ±1 s rate.
6	Run	Toggle switch between pos. & neg. several times.	Tgt.		Pulse motion shall be faster (almost twice as fast) for the first couple of seconds after each toggle of 4S4, then resume the 17 s rate.
7	Run	Same as Step 6.	Tgt.	Reset momentarily for each toggle.	Pulse Motion shall cease until 4S6 is placed back to normal, then pulse motion shall be double for first couple of seconds, then resume the 17 s rate.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.22.3 E/L TRIGGER leading edges. - The E/L trigger signals at TP43, TP44, and 4J4-D, shall have leading edges with the characteristics as specified in Table VI; switches 4S2 through 4S6 shall be as specified in 3.5.

TABLE VI. - E/L TRIGGER LEADING EDGES

TEST POINT OR TERMINAL	TEST POINT FOR SYNCHRONIZATION	CHARACTERISTIC
TP43	TP33	Sixteen leading edges evenly spaced at 8.0 ±0.5 ns. The total duration from first to last leading edges shall be 130 ns maximum. There shall be no unusually wide or narrow spacings.
TP44	TP44	Five leading edges evenly spaced 1.7 ±0.2 ns. The total duration from first to last leading edge shall be 6.5 ±0.5 ns.
4J4-D	TP44	Five leading edges with the same characteristics as for TP44 except with the delay as specified for 4J4-D in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.23 R > ±10M/S signal. - When the steps of Table VII are sequentially performed, the R > ±10M/S signal at TP42 shall be as specified in Table VII under the following conditions:

a. 4S2 placed in Test.
b. 4S3 placed as specified in Table VII.
c. 4S4 placed in Target.
d. 4S5 placed in Run.
e. 4S6 as specified in Table VII.

TABLE VII. - R > ±10M/S SIGNAL

STEP	4S3	4S6	TP42 SIGNAL CHARACTERISTICS
1	Neg.	Run	Logic 0 level.
2	Neg.	Reset	Logic 1 level.
3	Note	Run	Momentary transition from logic 0 to logic 1 and back to logic 0 level again each time 4S3 is toggled.

NOTE: Toggle 4S3 between the negative and positive positions several times.

3.5.24 Range rate analog signals. - When the switches 4S2 through 4S6 are sequentially positioned as specified in Table IX, the range rate signals shall be as specified in Table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE VIII. - RANGE RATE ANALOG SIGNALS

REQUIREMENT	CHARACTERISTIC	TERMINALS	
		COMPUTER	TEST FIXTURE
+310M/S ref.	Adjustable to +10.000 ±0.050 Vdc.	4J5-K	TP-2
-310M/S ref.	-10.000 ±0.050 Vdc	4J5-G	TP-3
Range rate output	As specified in Table IX	4J5-H	TP-1
Range rate return	Return side for rate signals	4J5-F	TP-4

TABLE IX. - RANGE RATE OUTPUT SIGNAL

STEP	4S2	4S3	4S4	4S5	4S6	OUTPUT SIGNAL
1	Test	Pos.	Tgt.	Run	Run	Adjustable to +9.775 ±0.005 Vdc.
2	Test	Neg.	Tgt.	Run	Run	Adjustable to -9.775 ±0.005 Vdc.
3	Test	Neg.	Tgt.	Run	Reset	0.0 ±0.1 Vdc.
4	Test	Neg.	No Tgt.	Run	Run	-6.4 ±0.1 Vdc.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.25 Range analog signals. - When the switches 4S2 through 4S6 are sequentially positioned as specified in Table XI the range analog signals shall be as specified in Table X.

TABLE X. - RANGE OUTPUT SIGNALS

REQUIREMENT	CHARACTERISTICS	TERMINALS	
		COMPUTER	TEST FIXTURE
5000M range ref.	+20.0 ±0.1 V	4J5-J	TP-5
Range output	As specified in Table XI.	4J5-A	TP-6
Range return	Return side for range signals.	4J5-B	TP-7

TABLE XI. - RANGE OUTPUT SIGNAL

STEP	4S2	4S3	4S4	4S5	4S6	
1	Test	Pos.	No tgt.	Run	Run	+6.4 ±0.1 Vdc
2	Test	Pos.	Tgt.	Run	Run	0.0 ±0.1 Vdc rising to +20.0 ±0.1 Vdc, taking 17 ±1 s to complete.
3	Test	Neg.	Tgt.	Run	Run	+20.0 +0.1 Vdc falling to 0.0 ±0.1 Vdc, taking 17 ±1 s to complete.
4	Test	Neg.	Tgt.	Freeze	Run	Dc level stops changing and remains stationary.
5	Test	Neg.	No tgt.	Run	Reset	+6.4 ±0.1 Vdc.
6	Test	Neg.	Tgt.	Run	Reset	Same as specified in Step 4.
7	Test	Neg.	Tgt.	Run	Run	Dc level shall continue to fall.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.26 Doppler signals response. - The computer shall respond to the application of sum and difference signals sequentially applied as specified in Table XII and with the following conditions:

a. Sum and difference input signal characteristics as specified in Table XIII.

b. The E/L trigger at TP44 shall move as specified in Table XIII, between the delay limits of less than 2 μs to 33 ±3 μs with respect to the signal at TP45.

c. The ECM relay (4K3) shall provide contact closures between terminals 4J4-B and as specified in Table XIII.

d. The TGT lock-on relay (4K2) shall provide contact closures between terminals 4J4-D and as specified in Table XIII.

e. The doppler audio output test signal shall be as specified in Table XIII for the conditions of Step 4 of Table XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE XII. - DOPPLER SIGNAL RESPONSE

STEP	TP44 SIGNAL	RELAY CLOSURES ECM	LOCK-ON	SIGNAL SUM	INPUTS DIFFERENCE	PHASE
1	Left to right 1 s	4J4-A	4J4-C	No signal	No signal	
2	Left to right, 1 s	4J4-A	4J4-C	No signal	1.5 V	170°
3	Right to left, 17 s	4J4-A	Note 1	0.2 V	0.75 V	170°
4	Left to right, 17 s	4J4-A	4J4-2	0.2 V	0.75 V	10°
5	Stationary (note 2)	4J4-A	4J4-w	0.2 V	0.75 V	10°
6	Left ro right, 17 s	4J4-A	4J4-w	0.2 V	0.75 V	10°
7	Stationary (note 2)	Note 3	4J4-w	1.1 V	0.75 V	10°

NOTES 1. Adjustable to point where contact closure for terminal 4J4-w shall occur when the 0.2 V sum input level is reached.

2. With the RATE switch (4S6) in reset position the E/L trigger signal shall stop moving and remain stationary.

3. Adjustable to point where contact closure for terminal 4J4-V shall occur when the 1.1 V sum input level is reached.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE XIII. - DOPPLER INPUT AND OUTPUT SIGNALS

REQUIREMENT	CHARACTERISTIC	TERMINAL
Sum signal	Reference phase: 1.0 ±0.1 kHz sine wave, amplitude in peak-to-peak volts as specified in Table XII and as measured between TP47 (signal) and TP46 (signal return) on the computer.	4J4-F
Difference signal	Variable phase: 1.0 ±0.1 kHz sine wave having a lagging phase angle from the reference phase as specified in Table XII, amplitude in peak-to-peak volts as specified in Table XII and as measured between TP49 (signal) and TP48 (signal return) on the computer.	4J4-G
Audio signal	Sine wave having same characteristics as the sum signal except the amplitude shall be adjustable to 1.0 ±0.1 V peak-to-peak under conditions stated in Step 6 of Table XII.	4J1-E (signal) 4J1-F (signal return)

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

3.5.27 Subclutter visibility (SCV) and range rate accuracy test. - The computer after having met the requirements of 3.5.1 through 3.5.26 shall meet the subclutter visibility (SCV) and range rate accuracy tests as specified in MIL-R-50651 when substituted into a Radar Set AN/VPS-2. Radar Set AN/VPS-2 and facilities shall be as specified in MIL-R-50651

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be listed in MIL-STD-109.

4.2 First article (initial production) submission. - The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three computers manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. - When the Governemnt is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the currentversion before use.

4.3 Inspection provisions.

4.3.1 Submission of product. - Unless otherwise specified by the contracting officer, inspection lot size, lot information and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. - All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAP's the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. - Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. - The requirements and tests in Table XIV shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at the standard ambient temperature (60° F and 90° F).

TABLE XIV. - CLASSIFICATION OF DEFECTS
(100 percent inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL: NONE		
MAJOR:		
101. Electrical	3.4	4.6.2
102. Performance	3.5	4.6.3
MINOR: NONE		

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the currentversion before use.

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance or rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling. - One computer shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table XV. Three computers shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table XVI.

TABLE XV. - SPECIAL SAMPLING

CONTROL TEST	REQUIREMENT	TEST PROCEDURES
301. Fabrication	3.1	Applicable drawings - Visual
302. General specifications	3.2	MIL-F-13926 & MIL-C-4637 - Visual

TABLE XVI. - SPECIAL SAMPLING, ENVIRONMENTAL

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

4.4.1 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment. - Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Government design. - Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design. - The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliable indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. - In conjunction with 4.5.2.2, the standard test equipment listed in Table XVII shall be utilized in performing the applicable test of 4.6.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the currentversion before use.

TABLE XVII. - TEST EQUIPMENT LIST

ITEM NUMBER	
1. Power supply	6.2 ±0.5 Vdc, regulated; ac ripple less than 50 mV peak-to-peak; capacity, 3 A.
2. Power supply	Dual, 23.0 ±0.25 Vdc supplies, regulated; ac ripple less than 50 mV peak-to-peak; capacity, 1 A.
3. Power supply	Dual, 33.0 ±0.25 Vdc supplies, regulated; ac ripple less than 50 mV peak-to-peak; capacity, 1 A.
4. Power supply	24.0 ±0.5 Vdc, regulated; ac ripple less than 100 mV peak-to-peak; capacity, 100 mA.
5. 60 MHz oscillator	60.0 ±5.0 MHz sine wave, 50 mV output.
6. Variable phase	Provide two output sine wave signals, one as reference phase and one with 0 to 360° adjustable phase lug with respect to the reference phase. Frequency 1.0 ±0.1 kHz. Power output 40 mW (5 V across 600 ohms).
7. Dc digital voltmeter	Visual display 5 digits. Full scale range: 50,000 V or greater. Input resistance: 10 megohm or greater. Accuracy: ±0.01%.
8. Oscilloscope	Dual channel; rise time of scope plus measuring probe, 10 ns/cm or greater; input resistance 8 megohms or greater.
9. Test fixture	See Figure 2. See Table XVIII for test fixture parts list.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

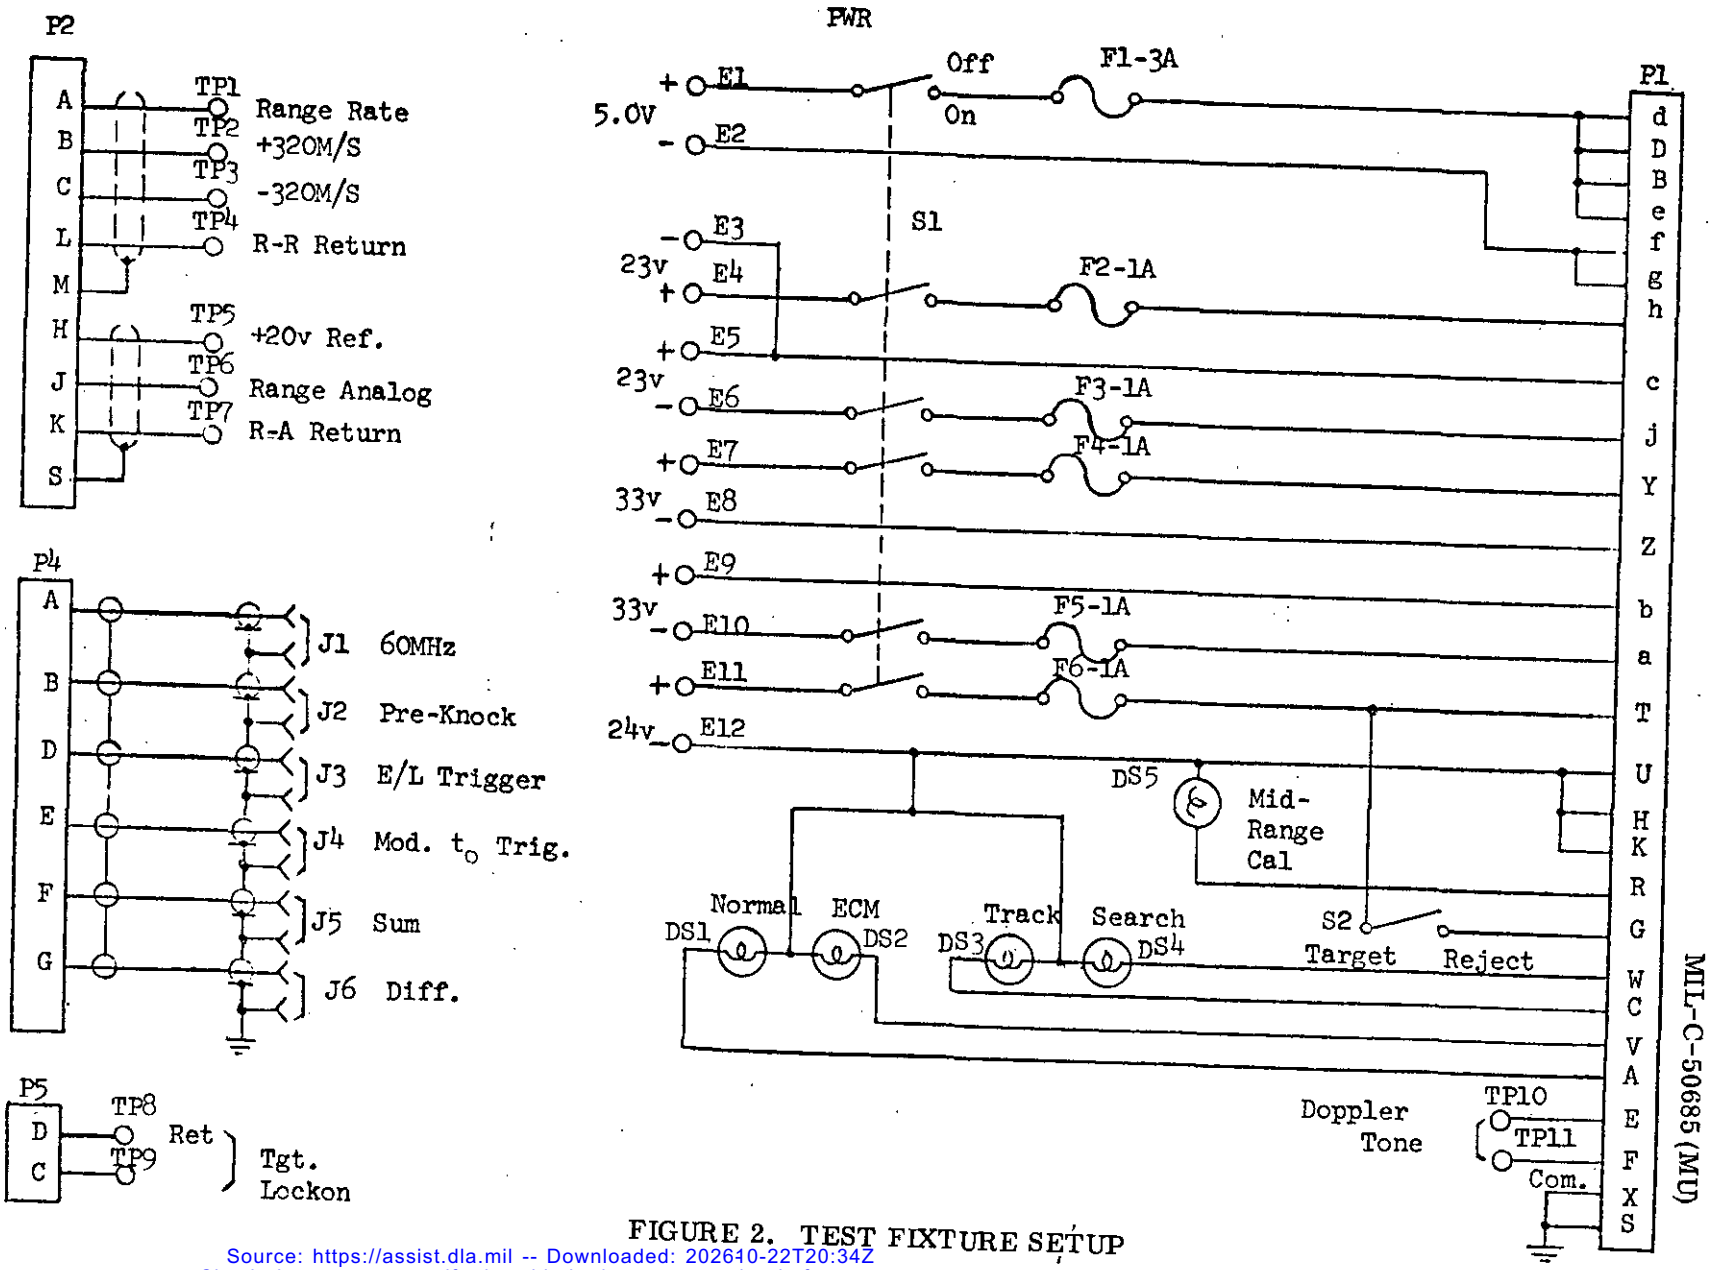


FIGURE 2. TEST FIXTURE SETUP

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

TABLE XVIII. - TEST FIXTURE PARTS LIST

DESIGNATION	NOMENCLATURE AND DESCRIPTION
DS1 thru DS4	Lamp, miniature bayonet, type 47.
DS5	Lamp, miniature bayonet, type 313.
B1 thru E12	Binding post, H. H. Smith 257 or equivalent.
F1	Fuse, type 3AG, 3 A.
F2 thru F6	Fuse, type 3AG, 1 A.
J1 thru J6	Connector, Receptacle, UG-625B/U or equivalent.
P1	Connector, Plug, Burndy L18 TF32S6N-A.
P2	Connector, Plug, Burndy L20 TF16P6N-A.
P4	Connector, Plug, Bendix PTSF06SE22-78C.
P5	Connector, Plug, Burndy L12 TF106PX-A.
S1	Switch, 6PST.
S2	Switch, SPST.
TP1 thru TP11	Tip jack, H. H. Smith - 1501 or equivalent.
XDS1 thru XDS5	Lamp holder, Dialoc 502-8136-102.
XF1 thru XF6	Fuse holder, Littelfuse 342014.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

4.6 Test methods and procedures.

4.6.1 Environmental. - Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration. - The test shall be performed as specified in Method 514, Procedure IX, Part I, of MIL-STD-810 except that failure criteria do not apply. After vibration, the computer shall be tested as specified in 4.6.2 and 4.6.3 for compliance with 3.3.1.

4.6.1.2 Shock. - This test shall be performed as specified in Procedure I of Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 G. After the shock impulses, the computer shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (nonoperating and operating). - This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in Step 2 the altitude shall be limited to 40,000 feet (5.5 in Hg). Operation of Step 3 shall be the performance tests specified in 4.6.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). - This test shall be performed as specified in Procedure I, Method 501, of MIL-STD-810. The temperature of Step 2 shall be +160° F. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155° F. In Step 5, the temperature shall be maintained for 4 hours and the computer shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

4.6.1.4.2 Low (operating and nonoperating). - This test shall be performed as specified in Procedure I, Method 502 of MIL-STD-810. The temperature of Step 2 shall be -65° F maintained for not less than 4 hours. The temperature of Step 4 shall be -40° F. In Steps 5 and 7, the computer shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5 Humidity (nonoperating). - This test shall be performed in accordance with Procedure II, Method 507 of MIL-STD-810. The computer shall be tested in accordance with 4.6.3.


Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the current version before use.

4.6.2 Electrical. - Continuity shall be inspected by standard and measuring equipment (SME) and visual examination for compliance with 3.4.

4.6.3 Performance. - The selected computers shall be tested as follows: Connect power supplies to the test fixture (item 9) in accordance with Figure 3. Adjust power supplies, items 1 through 4, to deliver input voltages as specified in Table I. Leave the 60 MHz oscillator, item 5, and the variable phase generator, item 6, disconnected from the test fixture, item 9, at this time. For 4.6.3.1 through 4.6.3.26 the requirements of 3.5 shall apply. Oscilloscope, item 8, will be used to observe all signals unless otherwise noted. When it is specified to observe signals at test points, it shall mean the test points on the computer unless otherwise noted.

4.6.3.1 Voltage inputs and distribution. - Turn the test fixture PWR switch S1 to the ON position and using the digital voltmeter, item 7, observe the distributed voltages at terminals as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

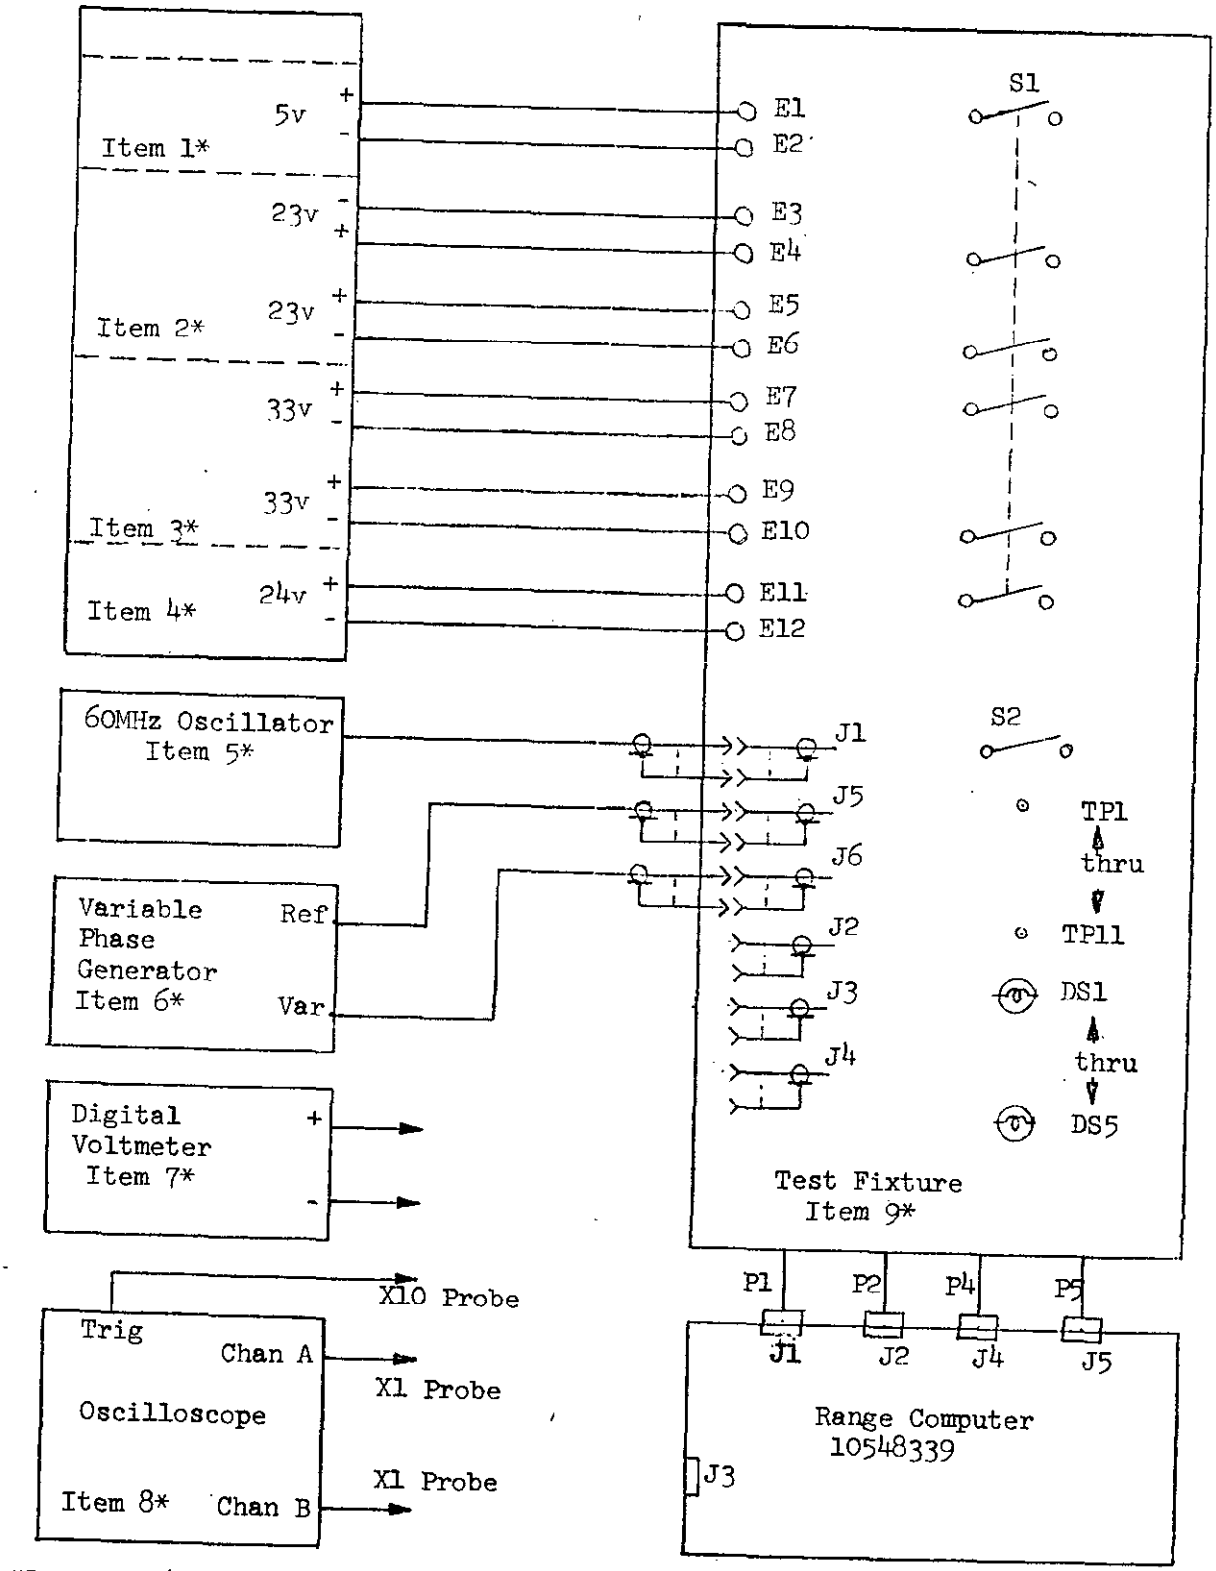

*Refer to 4.5.2.3

FIGURE 3. TEST SETUP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

4.6.3.2 Midrange lamp 4DS1. - With the conditions of 4.6.3 observe that the midrange lamp 4DS1 shall be dimly lit.

4.6.3.3 Midrange switch 4S1. - Using midrange calibration lamp DS5 on the test fixture, depress the midrange switch 4S1 on the computer and check for compliance with 3.5.3.

4.6.3.4. 7.5 MHz clock output. - Connect the 60 MHz oscillator, item 5, to J1 on the test fixture with the amplitude requirements of 3.5.4. At TP38 observe the 7.5 MHz clock signal as specified in 3.5.4.

4.6.3.5 $\overline{\text{PRF RESET}}$ signal. - Sync scope from TP20 and at TP20 observe the $\overline{\text{PRF RESET}}$ signal as specified in 3.5.5.

4.6.3.6 $\overline{\text{PRF}}$ signal. - Sync scope from TP20 and observe at TP19 the $\overline{\text{PRF}}$ signal as specified in 3.5.6.

4.6.3.7 $\overline{\text{PRF}}$ cal signal. - Sync scope from TP20 and observe at TP19 the $\overline{\text{PRF}}$ calibration signal as specified in 3.5.7 with the midrange calibration switch 4S1 depressed.

4.6.3.8 $\overline{\text{PRF}}$ signal. - Sync scope from TP20 and observe at TP31 the $\overline{\text{PRF}}$ signal as specified in 3.5.8 with the midrange calibration switch 4S1 depressed.

4.6.3.9 T1 signal. - Sync scope from TP20 and observe at TP21 the T1 signal as specified in 3.5.9.

4.6.3.10 Mod t_o trigger signal. - Sync scope from TP31 and observe at TP45 and also at J4 on the test fixture MOD to trigger as specified in 3.5.10.

4.6.3.11 T2 signal. - Sync scope from TP21 and observe at TP34 the T2 signal as specified in 3.5.11.

4.6.3.12 T3 signal. - Sync scope from TP21 and observe at TP23 the T3 signal as specified in 3.5.12.

4.6.3.13 $\overline{\text{T11}}$ signal. - Sync scope from TP20 and observe the $\overline{\text{T11}}$ signal as specified in 3.5.13.

4.6.3.14 $\overline{\text{T1/250}}$ signal. - Sync scope from TP9 and observe at TP9 the $\overline{\text{T1/250}}$ signal as specified in 3.5.14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

4.6.3.15 $\overline{\text{T3/4KC}}$ signal. - Sync scope from TP10 and observe at TP10 the $\overline{\text{T3/4KC}}$ signal as specified in 3.5.15.

4.6.3.16 $\overline{\text{200M}}$ signal. - Establish the conditions of 3.5.15, using switch S2 on the test fixture to apply the +24 V to 4J1-G and observe the $\overline{\text{200M}}$ signal at TP11 as specified in 3.5.16.

4.6.3.17 T3 $\rightarrow$T10 SERIAL and $\dot{\text{R}}$ SERIAL signals. - Sequentially place switches 4S2 through 4S6 as specified in Table III and at TP17 and TP18 observe the T3 $\rightarrow$T10 SERIAL and $\dot{\text{R}}$ SERIAL signals respectively as specified in Table III and the conditions of 3.5.17.

4.6.3.18 TRACK signals.

4.6.3.18.1 No target condition. - With switches 4S2 through 4S6 placed in the positions as specified in 3.5 observe the TRACK signal at TP15 and TP24 as specified in 3.5.18.1.

4.6.3.18.2 Target condition. - With the conditions of 3.5.18.2 observe the TRACK signal at TP15 and TP24 as specified in 3.5.18.2

4.6.3.18.3 Target fade (short term). - With the conditions of 3.5.18.3 observe the TRACK signal at TP15 and TP24 as specified in 3.5.18.3.

4.6.3.18.4 Target fade (long term). - With the conditions of 3.5.18.4 observe the TRACK signal at TP15 and TP24 as specified in 3.5.18.4.

4.6.3.18.5 Target lock-on signal. - With the conditions of 3.5.18.5 observe the target lock-on signal, at TP9 (signal) and TP8 (signal return) on the test fixture, as specified in 3.5.18.5

4.6.3.19 MID RANGE lamp 4DS1. - Observe the conditions of the midrange lamp as specified in 3.5.19.

4.6.3.20 E/L COURSE signal. - Observe at TP33 the E/L COURSE signal as specified in 3.5.20.

4.6.3.21 PRE RANGE trigger signal. - Observe at TP36 and also J2 on the test fixture the PRE RANGE (pre-knock) trigger signal as specified in 3.5.21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

4.6.3.22 E/L TRIGGER.

4.6.3.22.1 E/L TRIGGER characteristics. - Observe at TP43 and TP44 and also J3 on the test fixture the E/L trigger characteristics as specified in Table IV.

4.6.3.22.2 E/L TRIGGER movements. - Sequentially position switches 4S2 through 4S6 as specified in Table V and observe the E/L trigger characteristics at TP43 and TP44 as specified in Table IV and VI.

4.6.3.22.3 E/L TRIGGER leading edges. - Position the switches 4S2 through 4S6 as specified in 3.5 and observe the E/L trigger leading edges at TP43, TP44 and J3 on the test fixture, as specified in Table VI.

4.6.3.23 $\dot{R} > \pm 10$ M/S signal. - Position switches 4S2 through 4S6 as specified in 3.5.23. Sequentially perform the steps of Table VII and observe the $\dot{R} > \pm 10$ M/S signal at TP42 as specified in Table VII.

4.6.3.24 Range rate analog signals. - Sequentially position switches 4S2 through 4S6 as specified in Table IX and observe the range rate analog signals, as specified in Table VIII.

4.6.3.25 Range analog signals. - Sequentially position switches 4S2 through 4S6 as specified in Table XI and observe the range analog signals at terminals as specified in Table X.

4.6.3.26 Doppler signals response. - Connect the variable phase generator, item 6, as shown in Figure 3. Sequentially apply the sum and difference signals as specified in Table XII under the conditions as specified in 3.5.26. Observe that the E/L trigger at TP44 responds as specified in Table XII.

4.6.3.27 Subclutter visibility (scv) and range rate accuracy test. - After performing the test of 4.6.3 through 4.6.3.26, substitute the computer into a Radar Set AN/VPS-2 and perform the subclutter visibility and range rate accuracy test as specified in MIL-R-50651. The Radar Set AN/VPS-2 and test facilities used shall be as specified in MIL-R-50651.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:34Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. - Packaging, packing and marking shall be in accordance with Packaging Data Sheet 10548339. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. - The computer, Range CP-888/VPS-2 is part of Radar Set AN/VPS-2. The computer provides the synchronizing and ranging systems for the radar set. The synchronizing system establishes the PRF of the radar, and generates the timing signals used to coordinate the transmitting, receiving, ranging, and test facilities systems. The ranging system generates the target range and range rate in the form of two dc analog voltages for use in the FCS to compute target motion lead angle.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable level of preservation packaging and packing.

d. Level of protection required.

e. Applicable stock number.

f. Block of serial numbers to identify each computer.

g. Requirement for first article submission.

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 1285-A288

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Army

OFFICIAL BUSINESS

Commanding Officer
Frankford Arsenal
ATTN: SMUFA-T1000
Philadelphia, Pa. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:34Z
Check the source to verify that this is the current version before use.