INCH-POUND

MIL-C-82121B(MC)

23 May 1994

SUPERSEDING
MIL-C-82121A(MC)
9 September 1986

MILITARY SPECIFICATION

CUMMERBUND, WOMAN'S: EVENING AND MESS DRESS (OFFICER'S)

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a scarlet wool cummerbund.

1.2 Classification. The cummerbunds shall be of one type and size with elastic strap adjustment.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specification and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50196	-	Thread, Silk
A-A-52094	-	Thread, Cotton
CCC-C-426	-	Cotton, Drill
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-21115	-	Cloth, Tropical: Wool; Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Method
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

2.2 Non-Government publications. The following documents(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

American Society for Testing and Materials (ASTM)
ASTM D 3951 Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide samples. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), before production is commenced, the first article, consisting of the number of cummerbunds specified by the procuring activity (see 6.2), shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of the responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Cloth, wool, tropical. The material for the front of the cummerbund shall be cloth, wool, tropical 10.5-ounce, scarlet shade 2502, conforming to type I, class 1 of MIL-C-21115.

3.3.2 Cloth, rayon, satin. The material for lining the cummerbund shall be cloth, satin, rayon, scarlet shade 2504 (see 6.3), 4.5 ounce conforming to class 3 of MIL-C-368.

3.3.3 Elastic webbing. The elastic webbing shall be made of rayon yarn of suitable grade and denier to meet the requirements specified below, and natural or synthetic rubber strands of a suitable gage to meet the requirements specified below. The webbing shall be composed of two ground warps (one face and one back), one elastic warp, and one filling so as to produce a right twill effect on the face and back of the fabric. The elastic strands shall weave in such a manner as to be over all the back picks and under all the face picks. The finished webbing shall conform to the following when tested as specified in Section 4, Table II:

Width-inches	1-1/8 ± 1/16
Weight per linear yd-ozs	0.96 minimum
Total warp	170 minimum
Elastic strands	22 minimum
Picks per inch	56 minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

The color of the webbing shall be black, showing good fastness to laundering, wet (dry) cleaning, crocking and perspiration when tested as specified in Section 4, Table II.

3.3.4 Cloth, cotton, drill. The cummerbund shall be interlined with cloth, cotton drill 7.5 ounce/square yard, unbleached, conforming to type I,
class 2 of CCC-C-426.

3.3.5 Thread

3.3.5.1 Silk thread. The thread for hand sewing shall be silk, size C, 2-ply, conforming to type III of A-A-50196.

3.3.5.2 Cotton thread. Thread for seaming and stitching shall be cotton, mercerized finish, ticket No. A, 3-ply, conforming to type III of A-A-52094. Basting thread shall be a good commercial grade.

3.3.5.3 Color and colorfastness. The cotton and silk thread shall show good fastness to light when tested as specified in the applicable thread specification.

3.3.6 Hardware. The buckle and slides shall be made of brass or bronze, nickel plated, and shall conform to the design and dimensions shown on Figure 1.

3.3.7 Label. Each cummerbund shall be provided with an identification label, conforming to type VI, class 1 of DDD-L-20. The label shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract Number
Name of Contractor
Wool Products Act Information
Dry Clean Only

Note: Size of characters for "Name of Contractor" shall be minimum 6 point (approximately 1/16 inch).

The label shall show fastness to laundry and wet (dry) cleaning.

3.4 Design. The cummerbund shall be the U. S. Marine Corps design shown on Figure 2, having three horizontal pleats, left and right side extensions with the front interlined, two piece lined back, with elastic straps at each end, a clasp type metal buckle at the turned ends of the elastic straps, and metal adjusting slides on each elastic webbing strap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. The standard patterns provide a 1/4-inch allowance for front and interlining seams, and 3/8-inch allowance for front and lining seams, unless otherwise specified in Table I. Standard patterns shall show seam allowances and directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. The cummerbund shall be cut from the specified materials in accordance with the number of pattern parts indicated:

Item	Pattern Nomenclature	No. of Cut Parts
	Material: Cloth, Wool Tropical	
1.	Front	1
2.	Side Front	2
	Material: Cloth, Rayon, Satin	
3.	Front Lining	1
4.	Extension Piece	1
	Material: Cloth, Cotton, Drill	
5.	Front Interlining	1

3.6 Construction. The cummerbunds shall be manufactured in accordance with the operations and stitch, seam and stitching types specified in Table I. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cummerbunds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitchings, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.1.2 Shade marking. The rayon lining parts of the cummerbund shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

1. Corrosive metal fastening devices
2. Sew-on shade tickets
3. Adhesive type tickets whose adhesive discolors or adheres to the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. a. Cut cummerbund in strict accordance with patterns furnished. b. Cut all materials in direction indicated by directional lines on pattern. c. Cut rayon lining parts from one piece of rayon satin material. d. Cut two pieces of 1-1/8 inches wide elastic 15 inches and 8 inches long. e. The use of drill holes is prohibited.					
2	Replacement of damaged parts. a. Replace at time of cutting any part containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends or burns.					
3	Shade marking. a. Mark or ticket (see 3.6.1.2) all satin lining parts to insure proper assembly and a uniform shade throughout cummerbund. b. Adhesive tickets when used shall be adhered to the inside of cummerbund.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Shade marking. (cont'd)					
	c. The use of metal fastening devices is prohibited on the rayon lining.					
4	Sew on identification label.					
	Finished appearance. The label shall be properly positioned and sewn to the back of cummerbund.					
	a. Position identification label on the back lining midway between each end and with top edge of label 1 inch from the top edge of the lining. Sew label to back lining with a single row of stitches 1/16 inch from each edge.	301	SSa-1	10-14	A	A
5	Make center front.					
	Finished appearance. All pleats and joining seams shall finish smooth and flat without distortions. The seams shall finish with outside folded edge towards the top of the front piece.					
	a. The front shall be made of one ply of wool material.					
	b. Fold front lengthwise, inside out, in accordance with notches on patterns, forming pleats. Stitch each pleat from end to end with a continuous row of stitches, 3/8 inch from folded edge.	301	OSf-1	6-10	A	A
	c. Press front with the outside folded edge of each pleat towards the top of the finished cummerbund.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Join side fronts.					
	Finished appearance. The side fronts shall finish smooth and flat without distortion.					
	a. Join left and right side front smooth and flat without distortion.	301	SSa-1	10-14	A	A
7	Interline front.					
	a. The interlining shall be made of a single ply of cotton drill material.					
	b. Position interlining on the inside of the front with edges even and seam 1/8 inch from the raw edges.	301	SSa-1	10-14	A	A
8	Assemble cummerbund.					
	Finished appearance. The assembled cummerbund shall be uniform in appearance and finish smooth and flat. Seams shall be without puckers, pleats, or distortions. The cummerbund shall finish 3-1/2 ± 1/4 inches wide.					
	a. Seam the left lining piece to the front 1/4 inch from the top and bottom edges, leaving the left end open and turning the right edge in at the notches.	301	SSa-1	10-14	A	A
	b. Seam the right extension lining piece to the front 1/4 inch from the top and bottom edges leaving the right end open.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8	Assemble cummerbund. (cont'd)					
	c. Slip the 15-inch length of elastic through the right end opening into the enclosed assembly with the edges even. Turn the top and bottom seams of the front assembly onto the lining and against the elastic. Stitch across the end with 1/4 inch seam, closing the right end and catching the elastic in the stitching.	301	SSa-1	10-14	A	A
	d. Slip the 8-inch length of elastic through the left end opening and repeat operation (c).	301	SSa-1	10-14	A	A
	e. Trim corners and raw edges of seams for proper turning.					
	f. Turn cummerbund to outside position through the opening of the right side lining, forcing out the seamed edges and baste the edges to hold the desired shape.					
	g. Turn under the end of the 8 inch elastic 1/4 to 3/8 inch and stitch to the body of the elastic 1/8 inch from the folded edge catching the turned under portion in the stitching.	301	EFa-1	10-14	A	A
9	Clean cummerbund.					
	a. Remove basting threads, trim all ends of stitchings and remove all loose threads from cummerbund.					
	b. Remove all spots, shade tickets, markers and stains from the cummerbund without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Press cummerbund. Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice without damage to the hooks. a. Press the entire cummerbund, removing all wrinkles, impressions, gloss marks and creases. b. Finish press.					
11	Attach hardware to buckle straps. Finished appearance. The buckle and adjustable slides shall be positioned and secured to the straps. a. The male half of the buckle and one adjustment slide shall be secured to the left strap as shown in Figure 2. The female half of the buckle and one adjustment slide shall be attached to the right strap. b. Insert the end of the left strap through the slide, the buckle opening and back through the slide to secure. c. Insert the end of the right strap through the slide, the buckle opening and back through the slide and into the opening of the extension lining piece.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements shall conform to those listed in Figure 2.

3.8 Workmanship. The finished cummerbund shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certificate.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with MIL-STD-105.

4.4 First article inspection. When first article is required, inspection shall be made of completely fabricated cummerbunds for all provisions of this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise, excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

4.5.2 In process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable, and as listed in Table II. The sample size (number of sample units) shall be as shown below. The lot shall be unacceptable if one or more units fail to meet requirements specified.

TABLE II Test methods.

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Elastic webbing	Width	3.3.3	Visual	1	Pass or fail
	Weight/linear yd.	3.3.3	5041 1/	5	Avg. of 5 det. to the nearest 0.01 oz
	Total warp	3.3.3	Visual	1	Pass or fail
	Elastic strands	3.3.3	Visual	1	Pass or fail
	Pick per inch	3.3.3	Visual	1	Pass or fail
	Weave	3.3.3	Visual	1	Pass or fail
	Material identification 2/	3.3.3			
	Colorfastness to:				
	- Laundering	3.3.3	5614	1	Good, fair or poor
	- wet (dry) cleaning	3.3.3	5622	1	Good, fair or poor
	- crocking	3.3.3	5651	1	Good, fair or poor
	- perspiration	3.3.3	5680	1	Good, fair or poor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Buckle and slide	Material identification 2/	3.3.6
	Plating identification 2/	3.3.6

1/ Except that a full width specimen 4 inches in length shall be used.

2/ Acceptable under certification of compliance procedure.

Lot Size (Lot Unit)	Sample Size (Sample Unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot Size Expressed as	Sample Unit for Testing
Elastic Webbing	Yard	2 Continuous Yards
Buckle	Buckle and slide (each)	1 Buckle and 1 Slide

4.5.4 Examination of the end item. The end item shall be examined for the defects listed in 4.5.2.1 and 4.5.2.2. The sample unit shall be one cummerbund. All defects shall be as indicated below.

Major defect - When seriously affecting appearance or serviceability.
Minor defect - When affecting appearance or serviceability, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

4.5.4.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Material defects and damages	a. Any hole.	101		
	b. Any weakening defect such as a smash, multiple float, or loose slub.	1		
	c. Shade bar or unsightly slub:			
	- on outside.	2		
	- on inside.		201	
	d. Needle chew, cut, tear, or or mend.	3		
	Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment, or when it is so conspicuously located as to be clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified as defects.			
Shaded Parts	a. Rayon satin badly shaded.		202	
Cleanness	a. Basting thread not removed.		203	
	b. Shade tickets not removed.			204
	c. Any spot or stain clearly noticeable:			
	- on outside of cummerbund.	102		
	- on inside of cummerbund.		205	
	d. Thread end or loose threads not removed throughout.			206
Component and assembly	a. Any part or required operation omitted (unless otherwise classified herein).	103		
	b. Any component not as specified	104		
Cutting	a. Any component part not cut in accordance with specification requirements.	105		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Pressing	a. Burned or scorched.	106		
	b. Omitted over entire cummerbund.		207	
	c. Poorly pressed.			208
Seams and stitching	a. Accuracy of seaming.			
	1. Seam(s) twisted, puckered, or pleated (unless otherwise classified herein).			209
	2. Part of material caught in unrelated operation or stitching:			
	- up to a distance of 1/4 (inclusive).		210	
	- for a distance greater than 1/4 inch.	107		
	3. End(s) of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.	108		
	4. Stitching overlapping the end(s) of thread break less than 1/2 inch.			211
	b. Open Seams.			
	1. Joining seams:			
	- up to 1/4 inch (inclusive).		212	
	- more than 1/4 inch but not more than 1/2 inch.		213	
	- more than 1/2 inch.	109		
	c. Skipped Stitches:			
	- 1/4 inch to 1/2 inch long		214	
	- more than 1/2 inch long.		215	
	d. Raw Edge:			
	- more than 1/8 inch up to 1/4 inch (inclusive).		216	
	- more than 1/4 inch up to 3/4 inch (inclusive).			217
	- more than 3/4 inch.	110		
	e. Seam type or stitch type not as specified.		218	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seams and stitching (cont'd)	f. Stitch tension. 1. Loose tension resulting in a loose seam.		219	
	2. Tight tension, (stitches break when normal strain is applied to the seam or stitching).		220	
	Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.			
	g. Stitches per inch; to be scored only if the condition exists on major portion (i.e. over one half or more) of seam. 1. Less than specified: - one stitch.			221
	- two stitches.		222	
	- three or more stitches.	111		223
	2. More than maximum specified.			
Buckle and slide	a. Missing, broken, bent, cracked or otherwise defective, affecting appearance or function.	112		
	b. Type, size, color, or finish other than specified.	113		

4.5.4.2 Detailed defects applicable to specific parts. Detailed defects shall be classified as follows:

Front	a. Pleats 1. Outside folded edge of one or more pleat not towards top of finished cummerbund.		224	
	2. One or more pleats set on crookedly, affecting appearance.		225	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Front (cont'd)	3. One or more pleats uneven in width by 1/4 inch or more.		226	
	4. One or more pleats twisted, affecting appearance.		227	
	5. Less than 3 pleats.	114		
	b. Interlining Tight, short, or twisted, causing fullness or twist on front.		228	
Fitting of back lining	a. Lining tight or short causing fullness on outside of cummerbund.	115		
	b. Lining exposed on outside for a distance of:			
	- more than 1 inch but not more than 2 inches.		229	
	- more than 2 inches.		230	
Width of cummerbund	a. Less than 3-1/4 inches or more than 3-3/4 inches.			231
Buckle strap assembly	a. Improperly threaded, i.e., the male half of the buckle placed on the right strap and the female half of the buckle placed on the left strap.			232
	b. Improperly threaded, i.e., causing the buckle or slide to finish on reverse side or to function improperly.	116		
Label	a. Label omitted.	117		
	b. Label not stitched on 4 edges.			233
	c. Label positioned more than 1-1/4 inches from top edge of lining.			234

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

4.5.4.3 Size measurements. Any measurement deviating from the nominal dimensions and tolerances specified in Figure 2 shall be scored as a size measurement defect.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-129.

5. PACKAGING

5.1 Preservation. Preservation shall be in accordance with ASTM D 3951.

5.2 Packing . Cummerbunds preserved as specified in 5.1 shall be packed in accordance with ASTM D 3951.

5.3 Marking . In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. The cummerbund covered by this specification is intended to be worn by women officers with the evening dress and mess dress uniforms.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Acquisition data. Acquisition documents should specify the following:

(a) Title, number and date of this specification
(b) When first article is required (see 3.2)

6.3 Samples and patterns. For information regarding the availability of samples and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

6.5 Figures. Figures 1 and 2 show general design of the cummerbund and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

6.6 Subject term (key word) listing.

Cummerbund
Dress
Evening
Mess
Officers
Woman's

Preparing Activity
Navy - MC
Project No. 8445-N127

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

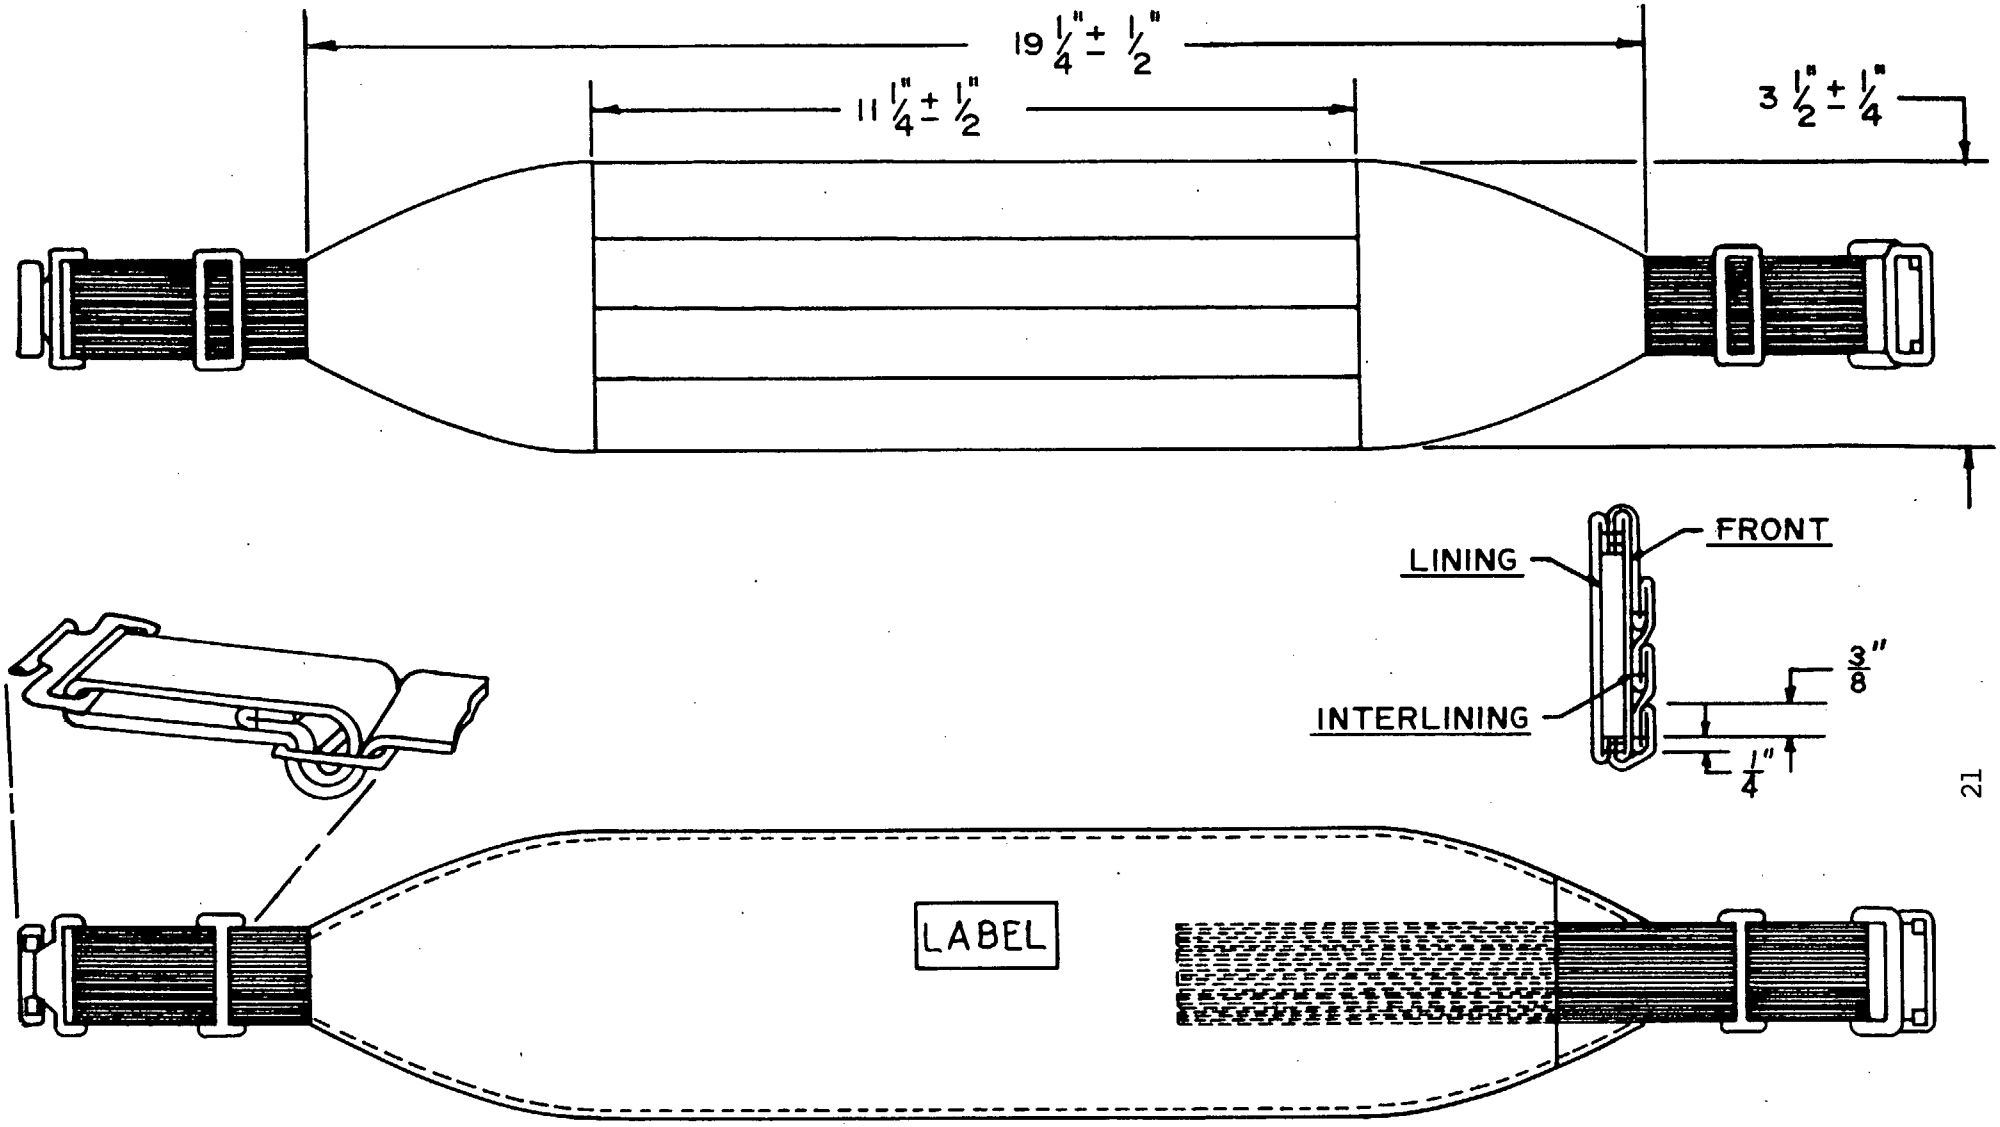


FIGURE 1. CUMMERBUND, WOMAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

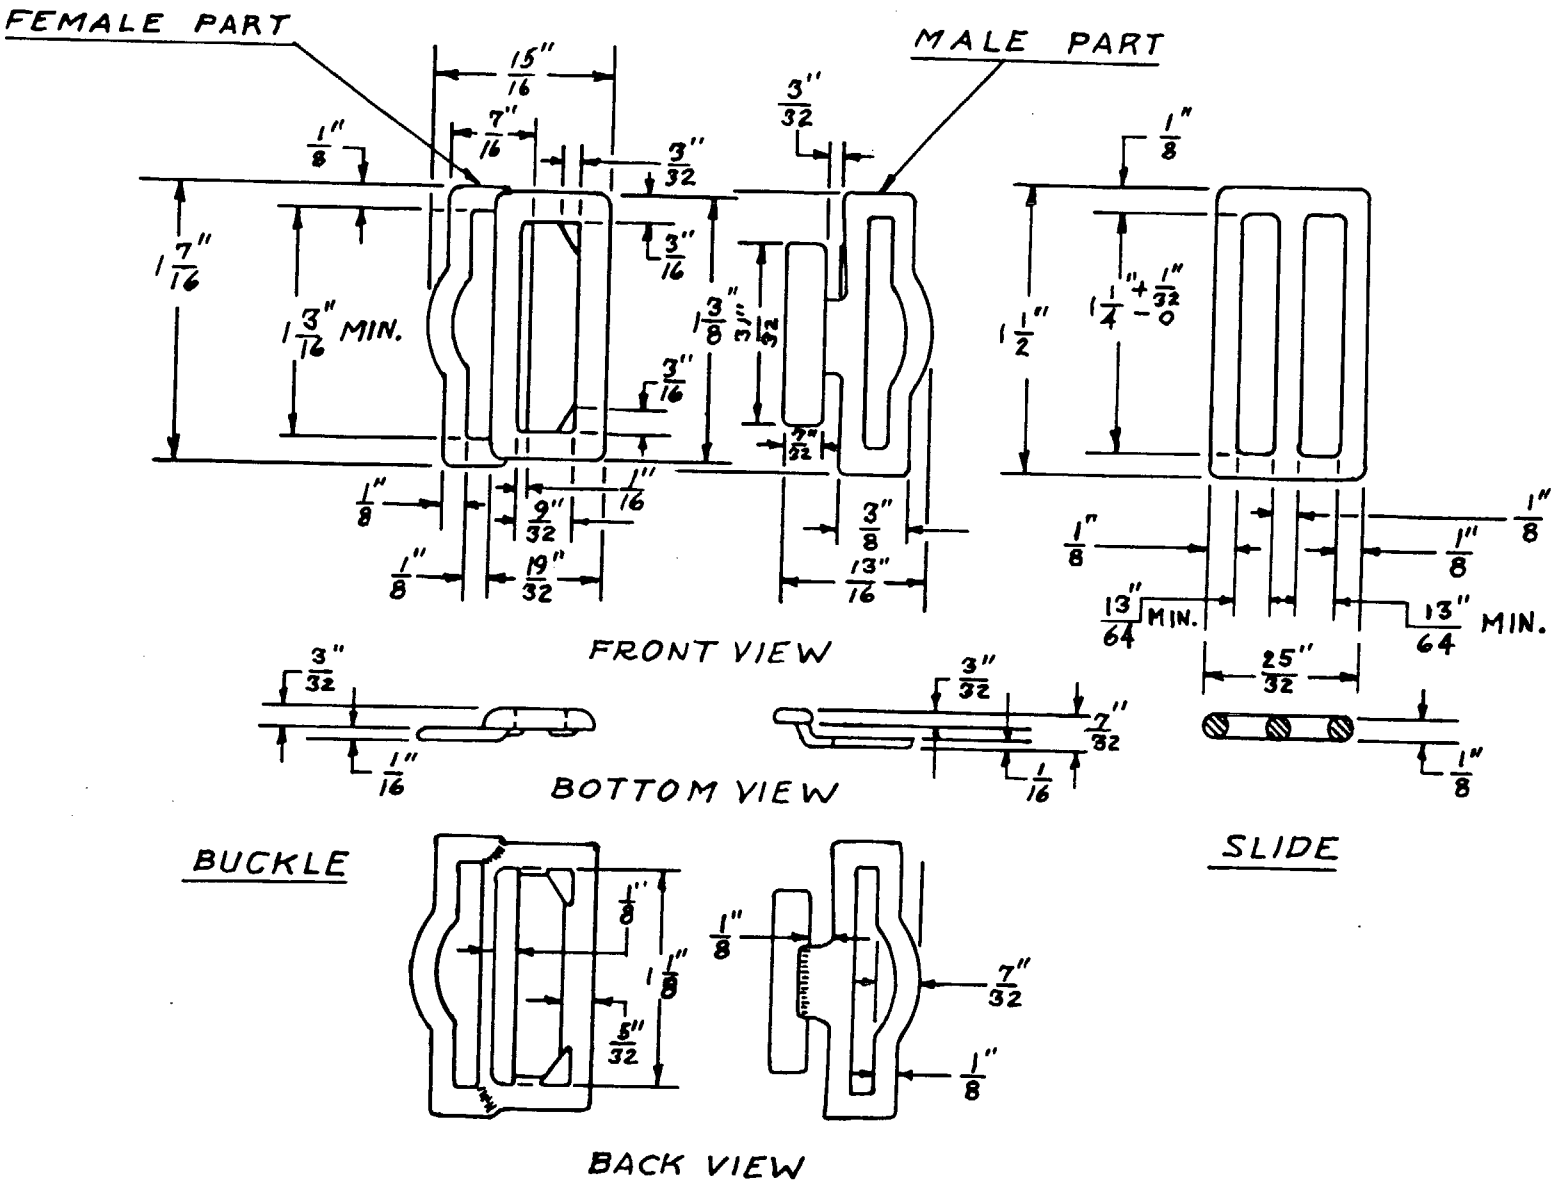


FIGURE 2. CUMMERBUND, WOMAN'S: SCARLET (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82121B(MC)	23 May 1994

3. DOCUMENT TITLE
CUMMERBUND, WOMAN'S: EVENING AND MESS DRESS (OFFICER'S)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER	(703) 640-4584	278-4584
c. ADDRESS (Include Zip Code) PROGRAM SUPPORT DIRECTORATE, PSE-C/S, MARCORSYSCOM, 2033 BARNETT AVENUE SUITE 315, QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23106:422
Check the source to verify that this is the current version before use.