26 September 1968
USED IN LIEU OF
MIL-B-43246
30 June 1964

MILITARY SPECIFICATION

BINDING, SNOWSHOE, UNIVERSAL

This limited coordinated Military specification has been prepared by the U.S. Army Natick Laboratories (GL) based upon currently available technical information, but has not been approved for promulgation as a coordinated revision of Military Specification MIL-B-43246. It is subject to modification. However, pending its promulgation as a coordinated Military specification, it may be used in procurement.

1. SCOPE

1.1 This specification covers one type and size universal snowshoe binding consisting of a toe strap and a heel and instep strap.

2. APPLICABLE DOCUMENTS

* **2.1** The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

V-T-295	– Thread, Nylon.
QQ-Z-325	– Zinc Coating, Electrodeposited, Requirements For.
DDD-L-20	– Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636	– Box, Fiberboard.
PPP-F-320	– Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Military

JAN-E-480	– Enamel, Baking, Phenol-Or Urea-Formaldehyde.
MIL-B-543	– Buckles, Tongueless and Web Strap.
MIL-H-9890	– Hardware, Individual Load Carrying Equipment: and Hardware, Miscellaneous.
MIL-L-11075	– Loop, Strap Fastener.
MIL-W-17337	– Webbing, Textile, Woven, Nylon.
MIL-W-27265	– Webbing, Textile, Woven Nylon, Impregnated.

STANDARDS

Federal

Fed. Std. No. 751 – Stitches, Seams, and Stitchings.

Military

MIL-STD-105	– Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	– Marking for Shipment and Storage.
MIL-STD-147	– Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:59Z
Check the source to verify that this is the current version before use.

DRAWING

ARMY NATICK LABORATORIES

2-10-61 – Binding, Snowshoe, Universal.

(Miniature copy of Drawing 2-10-61, identified as figure 1, is attached for information only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), before production is commenced, a sample of the binding covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials. Materials shall conform to the referenced specifications, drawing and requirements specified herein. Where materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice.

* 3.2.1 *Webbing, woven nylon.* The one (1) inch and two (2) inch width nylon woven webbing as shown on Drawing 2-10-61 shall conform to MIL-W-17337 except that the color of the webbing shall be natural (white).

3.2.1.1 *Impregnation.* Impregnation of webbing shall conform to class L treatment of MIL-W-27265 except that in the flexibility tests, the average stiffness increase determined at -65 F. shall be not greater than 60 percent when compared with the average stiffness at standard temperature and humidity.

3.2.2 *Buckle, tongueless, 2-bar.* The 2-bar tongueless buckle shall conform to type II, style 1, class 3 of MIL-B-543 except that the enamel shall conform to 3.2.6.

* 3.2.3 *Loop, strap fastener.* The strap fastener loop shall conform to type III, style G of MIL-L-11075 or to type IV hardware of MIL-H-9890, except that the color of the enamel shall be as specified in 3.2.6.

3.2.4 *Buckle, web strap.* The web strap buckle shall be a commercial type cited in 6.3 or equal. The buckle shall be given a phosphate treated zinc plating conforming to type III, class 2 of QQ-Z-325 followed by bake enameling. The enamel shall conform to 3.2.6.

3.2.5 *Thread, nylon.* Thread shall conform to type I or II, class 1, or to type III of V-T-295. The thread shall be letter size E and the color shall be natural (white).

3.2.6 *Enamel.* The enamel shall conform to type I or II of JAN-E-480. After application, the color of the enamel shall approximately match the color of the webbing specified in 3.2.1.

* **3.3 Construction.** Construction of the binding shall conform to Drawing 2-10-61 and as specified herein.

* 3.3.1 *Webbing, ends, cut.* The cut ends of the webbing as indicated on Drawing 2-10-61 shall be fused prior to stitching or assembly. After fusing, the ends shall be free from frayed edges and loose fibers.

* 3.3.2 *Stitching.* All stitching shall conform to type 301 of Fed. Std. No. 751 with 6 to 8 stitches per inch. Any thread breaks in stitching shall be overstitched not less than 1/2 inch at each break. The ends of all stitching shall be overstitched not less than 1/2 inch except where ends are turned under in a hem or are held down by other stitching. Where boxstitching is performed automatically, a minimum of 3 tying, overlapping or backstitches shall be used to secure the ends.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

* **3.4 Finish.** The finish coating of the buckles and loop shall be a smooth, uniform dry finish without blisters, peeling, chipping and cracking. The finish shall be free from any area of no film, sag, run, drop and scratch.

* **3.5 Marking.** The identification marking shall be applied in the locations shown on Drawing 2-10-61 and shall conform to type IV, class 5 of DDD-L-20 except that the marking medium may be blue and the legend shall consist of the letters "U.S.", the manufacturer's identification, and the contract number printed with characters a minimum of 1/4 inch in height.

* **3.6 Workmanship.** Thread tension shall be maintained so that there will be no loose stitching. Seam allowances shall be maintained with seams properly sewed so that no runoff, pleat, twist or pucker shall result. All thread ends shall be trimmed to 1/2 inch or less. The webbing shall be free of any cut, hole, tear, frayed or scalloped edge and abrasion mark. Metal components shall be free of deformation, fracture, burr, rough or sharp edge. The finished bindings shall be clean and free from oil, grease, dirt, or stain.

4. QUALITY ASSURANCE PROVISIONS

* **4.1 Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, the preproduction sample shall be examined in accordance with the defects in 4.3.3.1 and for dimensions specified.

* **4.3 Inspection.** Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 *Component and material.* In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.1.1 *Component testing.* In addition to the quality assurance provisions of the subsidiary specifications, testing shall be performed on components listed in table I for the test characteristics shown.

* 4.3.2 *Process inspection.* Inspection shall be made at any point or during any phase of the manufacturing process to determine whether the required operations are accomplished as specified. Process inspection shall be conducted to see that accomplishment of the following is in accordance with the specified requirements. Whenever a nonconformance is noted, correction shall be made to the affected items and the process.

Requirements or operation	Requirement reference
Web strap buckle is zinc plated.	3.2.4
Web strap buckle is phosphate treated to bake enameling.	3.2.4

Table I. *Component tests*

Component and lot expressed in terms of	Character-istic	Rqmt. para.	Test Method	Rqmt appl to		No. determ per sample unit	Results rptd as	Insp level	AQL
				Ind unit	Lot avg.				
Nylon webbing, 1 inch width (1 yard)	Flexibility	3.2.1.1	MIL-W-27265	----	X	5 (warp direction)	To near-est 1%	S-1	N/A
Nylon webbing, 2 inch width (1 yard)	Flexibility	3.2.1.1	MIL-W-27265	----	X	5 (warp direction)	To near-est 1%	S-1	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

4.3.3 *End item inspection.* The inspection lot shall be all of the completely fabricated and assembled bindings submitted for inspection at one time. The sample unit for this inspection shall be one binding.

* **4.3.3.1** *Visual examination.* Visual examination of the bindings shall be made for defects listed in table II. The inspection level shall be II with an acceptable quality level (AQL) of 6.5 for major defects and 15.0 for total defects expressed in terms of defects per hundred units.

TABLE II. *Classification of defects.*

Examine	Defect	Classification	
		Major	Minor
Webbing	Not latex impregnated finish.	X	
	Not natural color.		X
	Not uniform in color.		X
Finish:			
Buckles and loop	Missing.	X	
	Color of finish not as specified.		X
	Coating not smooth and uniform.		X
	Finish is not dry, i.e., wet or tacky to touch.		X
	Coating is blistered, peeled, chipped or cracked.		X
	Area of no film, sag, run, drop or scratch.		X
Components	Any component missing.	X	
	Any component misplaced.		X
	Functioning component that is inoperative or will not function as intended, i.e., no tension spring in web strap buckle.		X
	Type or size not as specified.	X	
Stitches and stitching	Not type specified.	X	
	One stitch less than minimum specified.		X
	Two or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified.		X
	Any row of stitching missing (except boxstitching).	X	
	Boxstitching incomplete: - one row of stitching omitted.		X
	- two or more rows of stitching omitted.	X	
	Runoffs: - for more than three stitches.	X	
	- for three stitches or less.		X
	Skipped stitches: - three or more continuous skipped stitches.	X	
	- one or two skipped stitches.		X
	Stitching margin not within specified tolerance.		X
Thread breaks	Not overstitched.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

TABLE II. *Classification of defects (cont'd)*

Examine	Defect	Classification	
		Major	Minor
Stitching ends	Overstitched less than 1/2 inch (except where ends are turned under in a hem or are held down by other stitching).		X
	Less than three tying, overlapping, or backstitches (applicable to automatic boxstitching).		X
Stitch tension	Loose stitching.		X
Seams	Seam allowance not maintained.		
	Pleat or pucker.		X
Construction and workmanship	Any component part not fabricated of applicable referenced material.	X	
	Assembly not in accordance with Drawing 2-10-61.	X	
	Binding is not clean, e.g., evidence of oil, grease, dirt or stain.		X
	Cut, hole, tear, frayed edge or abrasion mark on webbing.		X
Cut end of webbing	Not fused (when applicable).	X	
	Fused but contains frayed edges or loose fibers.		X
Thread ends	Not trimmed to 1/2 inch or less.		X
Metal components	Deformed, fractured, burrs, rough or sharp edge.		X
Identification marking	Missing.	X	
	Not type specified.		X
	Not size specified.		X
	Not in specified location.		X
	Incomplete, misspelled or illegible.		X

4.3.3.2 *Dimensional examination.* Examination shall be made of the binding for defects in dimensions. Any dimension not within specified requirements shall be classified as a defect. The inspection level shall be S-3 with an AQL of 10.0 expressed in terms of defects per hundred units.

4.3.4 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing, and markings are in compliance with section 5 of this specification. Defects shall be scored as specified in table III. The inspection lot shall be the number of containers submitted for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:59Z
Check the source to verify that this is the current version before use.

TABLE III. *Examination of preparation for delivery.*

Examination	Defect
Marking Applicable to shipping container and polyethylene bagged package.	*Missing; incorrect; illegible; of improper size,* location, sequence or method of application.
Applicable to polyethylene bagged package.	Not black. Not on bag or white paper label.
Materials	Any nonconforming component; component missing, damaged or otherwise defective.
Workmanship	Open and noncontinuous heat seal and closure of polyethylene bag. Excess air not expelled from within the polyethylene bag.
Contents	Contents per bag or shipping container, as applicable, is more or less than required.

* 4.3.5 *Examination of shipping containers.* When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and strapping shall be in accordance with the appendix of the box specification.

* 4.3.6 *Examination of palletization.* An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table IV. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE IV. *Examination of palletization*

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Palletized pattern not as specified. *Interlocking of loads not as specified.* Load not bonded with required straps as specified.
Weight	Exceeds maximum load limit.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 *Level A.* Two complete bindings shall be compactly arranged and packaged in a close-fitting clear polyethylene film bag. The polyethylene film shall be not less than nominal 0.00125 inch (± 25%) thick. All seams and closures shall be effected by heat sealing. Prior to or during final closure operation, excess air within the bag shall be expelled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

* 5.1.2 *Level C.* The bindings shall be packaged in a manner to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 **Packing.** Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 *Level A.* Eighty bindings, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC-L of PPP-B-636. Each shipping container shall be fitted with a taped liner conforming to type CF, variety DW, grade V15c of PPP-F-320. Each shipping container shall be closed, waterproofed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

* 5.2.2 *Level B.* Eighty bindings, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275, style RSC-L of PPP-B-636. Each fiberboard shipping container shall be fitted with a taped liner conforming to type CF, variety SW, grade 275 of PPP-B-636. Each container shall be closed in accordance with method II as specified in the appendix of the box specification.

* 5.2.2.1 *When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box* fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 *Level C.* Bindings, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 **Palletization.** Unless otherwise specified (see 6.2) bindings, packed as specified, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern intended to be used shall be submitted to and approved by the contracting officer prior to its use.

* 5.4 **Marking.** In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4.1 *Polyethylene bagged packages.* Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY

6. NOTES

6.1 **Intended use.** The binding covered by this specification is intended to be used with the magnesium trail snowshoe or the bearpaw snowshoe. The binding will accommodate either a right or a left shoe or boot.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) First article – When preproduction sample is not required (see 3.1).

(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

(d) When weather resistant fiberboard is required for level B shipment (see 5.2.2.1).

(e) When palletization is not required (see 5.3).

6.3 The following manufacturer's items meet the performance requirements for web strap buckle specified in 3.2.4:

Item	Manufacturer	Manufacturer's part no.
Web strap buckle	North & Judd Mfg. Co.	6105
	Hollander Metal Products	Sp453
	Covert Mfg. Co.	S-0105L

The above is furnished only to indicate a possible source of supply. Any manufacturer's item which is equal to the referenced commercial type item will be acceptable.

* **6.4** The margins of this specification are marked with an asterisk(*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army — GL


Preparing activity:

Army — GL

Project No. 8465-A468

☆U.S. GOVERNMENT PRINTING OFFICE 1968-341-068 (A-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.

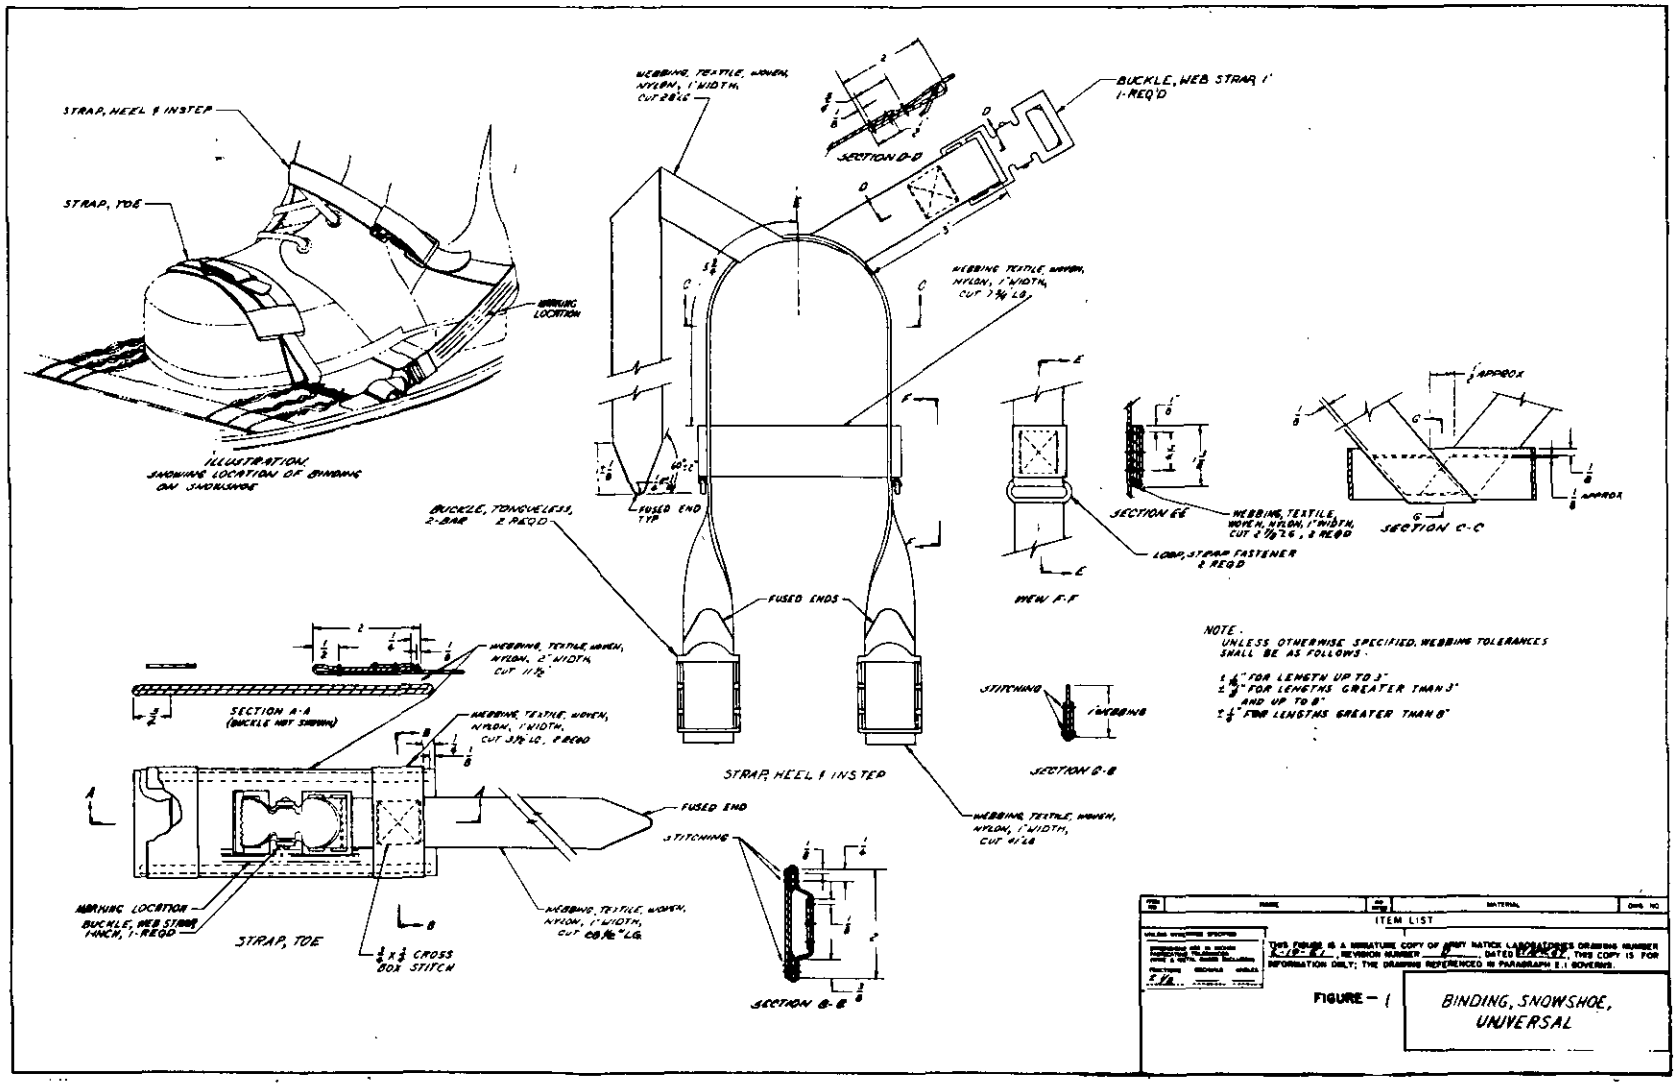

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:59Z
Check the source to verify that this is the current version before use.