25 March 1976
SUPERSEDING
MIL-B-43273A
23 July 1969

MILITARY SPECIFICATION

BOX, FIBERBOARD, FOR PACKING PERSONNEL PARACHUTES AND CANOPY ASSEMBLIES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a two piece fiberboard box and liner of one type and size for packing of personnel parachutes and canopy assemblies.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781	-	Strapping, Steel, and Seals
PPP-B-638	-	Boxes, Liners and Sleeves, Fiberboard, Knock-Down, Flat, Packing Of
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-S-760	-	Strapping, Nonmetallic, (and Connectors)
PPP-T-60	-	Tape, Packaging, Waterproof

STANDARDS

FEDERAL

FED-STD-595	-	Colors

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Fiberboard. The fiberboard from which box and liner blanks are fabricated shall conform to type CF, class weather resistant, variety SW, grade V3c, B or C flute of PPP-F-320. The box shall consist of a top and bottom section as shown in figure 1.

3.1.2 Tape. The tape used in the construction of boxes and liners, and for box closures shall be not less than 2 inches wide olive drab color cloth tape conforming to type IV of PPP-T-60.

3.1.3 Reinforcing strapping. The strapping used for reinforcing of the packed boxes shall conform to one of the following:

Nonmetallic	PPP-S-760, type II	3/8 inch wide by 0.015 inch thick
	PPP-S-760, type III	7/16 inch wide by 0.017 inch thick
Metallic	QQ-S-781, class 1, type I, finish B	3/8 inch wide by 0.015 inch

3.2 Dimensions. Unless otherwise specified (see 6.2), the dimensions of the cut and creased box and liner blanks shall be as shown in figure 1, with a plus or minus 1/8 inch tolerance for dimensions 1 inch and greater, and plus or minus 1/32 inch for dimensions less than 1 inch.

3.3 Construction. The user shall construct the box and liner as specified in the appendix of this specification.

3.4 Markings. The top section of the assembled box shall be marked as specified in figure 1.

3.5 Workmanship. Box blanks and inner liner blanks shall be uniformly cut and creased. The crease lines shall show no total penetration of the outer ply of the single wall corrugated blanks. Crease lines shall be straight and of a width and depth that is compatible to the thickness of the fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3 End item inspection. The inspection lot shall consist of all the boxes offered for inspection at one time.

4.3.1 Examination of the end item (box and liner blanks). Examination shall be in accordance with table I. The acceptable quality level (AQL) shall be 4.0 expressed in terms of defects per hundred units. The inspection level shall be S-2. The sample unit shall be one top box blank, one bottom box blank, and one inner liner blank.

TABLE I. Classification of defects

Examine	Defect
Scoring (top and bottom box blanks and liner blank)	Outer component ply or facing split sufficiently to materially affect serviceability when folded in normal manner during assembly of box and liner blanks
Blanks	Edges of blanks uneven, crushed
Top and bottom box blanks	Dimensions not as specified in figure 1, plus or minus 1/8 inch tolerance for dimensions 1 inch or greater, and plus or minus 1/32 inch for dimensions less than 1 inch As applicable, dimensions not as specified on the contract or order with tolerance cited above

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect
Inner liner	Dimensions not as specified in figure 1 with the above tolerance As applicable, dimensions not as specified on the contract or order with the above tolerance

* 4.4 Inspection of preparation for delivery. Packing and marking shall be inspected in accordance with the quality assurance provisions in PPP-B-638.

5. PACKAGING

* 5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Levels A, B or C. The boxes shall be packed in accordance with the applicable requirements of PPP-B-638.

5.2 Marking. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with the applicable requirements of PPP-B-638.

6. NOTES

6.1 Intended use. The fiberboard box specified herein is intended for packing of personnel parachutes and canopy assemblies.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When dimensions are to be different than those shown in figure 1 (see 3.2).
(c) Level of packing (see 5.1).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - AS
Air Force - 69

Review activity:

Air Force - 82

User activity:

Army - AV

Preparing activity:

Army - GL

Project No. 8115-0237

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

APPENDIX

USE CRITERIA, CLOSURE AND REINFORCEMENT REQUIREMENTS

10. SCOPE

10.1 This appendix covers requirements for use, closure, waterproofing of contents and reinforcing of fiberboard boxes.

10.2 This box is capable of multiple openings and closing to permit inspection or modification of the packed equipment.

20. Applicable documents - Not applicable.

30. Requirements.

30.1 Assembly of the box. The top and bottom sections of the box shall be assembled by folding over the sides with the short end flaps inclosed, and then folding over the ends to friction lock the flaps. The four corners of each box section shall be taped as shown in figure 1 with tape specified in 3.1.2. The length of the tape shall be not less than 2 inches longer than the depth of the box section. The tape shall be split at each end to provide better sealing at corner turn over seals. Liners shall be formed by abutting the ends and sealing with tape specified in 3.1.2. The gap between the abutted ends shall be not more than 1/8 inch. The length of the tape shall be the height of the liner plus or minus 1/8 inch. When formed, the liner shall be placed in the unmarked box section which shall be the bottom of the box (see figure 1).

30.2 Closure requirements. After the bottom section of the box has been packed, the top section shall be placed over the extruding part of the inner liner and allowed to slide down as far as it will go. After the box and liner are formed there shall be no complete liner rupture along any score line.

30.3 Waterproofing. Each packed box shall be continuously and securely sealed, with tape specified in 3.1.2, around the perimeter of the box with a one inch overlap. The tape shall be approximately centered over the seam formed by the top and bottom sections of the packed and closed box as shown in figure 1.

30.4 Reinforcing. Packed and closed boxes shall be reinforced with two flat straps specified in 3.1.3. The straps shall be applied girthwise $4 \pm 1/4$ inch from each end of the box as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

30.5 Markings. In addition to any special markings required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

40. Inspection. Boxes shall be inspected to determine compliance with requirements of this appendix. Sampling shall be conducted in accordance with the provisions of MIL-STD-105. The lot size shall be all boxes delivered at one time. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 6.5.

40.1 Boxes before packing. The sample unit shall be the unpacked top and bottom sections of the box and an inner liner. Classification of defects shall be listed below.

Examine	Defect
Liner	Top liner of fiberboard ruptured along score line Tape not as specified Length of tape less than liner height plus or minus 1/8 inch Ends of liner not abutted Gap between ends greater than 1/8 inch
Top and bottom box sections	Top liner of fiberboard ruptured along score line Tape not as specified Length of tape less than box section depth plus 2 inches Tape not split at each end, not properly applied
All components	Tape not securely and continuously applied

40.2 Examination for closing and strapping of boxes. The sample unit shall be one packed box, waterproofed and reinforced prior to shipment. Classification of defects shall be as listed below.

Examine	Defect
Closure tape	Not securely and continuously applied Tape not approximately centered Tape not as specified Tape overlap less than 1 inch


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

Examine	Defect
Strapping	Less than 2 straps Not strapping specified Not placed as specified Straps loose, twisted
Marking	Top section not marked as specified (see figure 1 and 3.4) Other markings omitted, incomplete, incorrect, illegible


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.


REVISIONS						
SYM	D.W.O. NO.	DR	CK	DESCRIPTION	PROJ ENGR	DATE APPROVED
A	D-147	FH	LB	DELETED "STEEL" FROM FLAT STRAPPING		28 OCT 68
B	[illegible]	WP	WCP	IN TITLE DELE "PACKAGING".		8 MAR 76

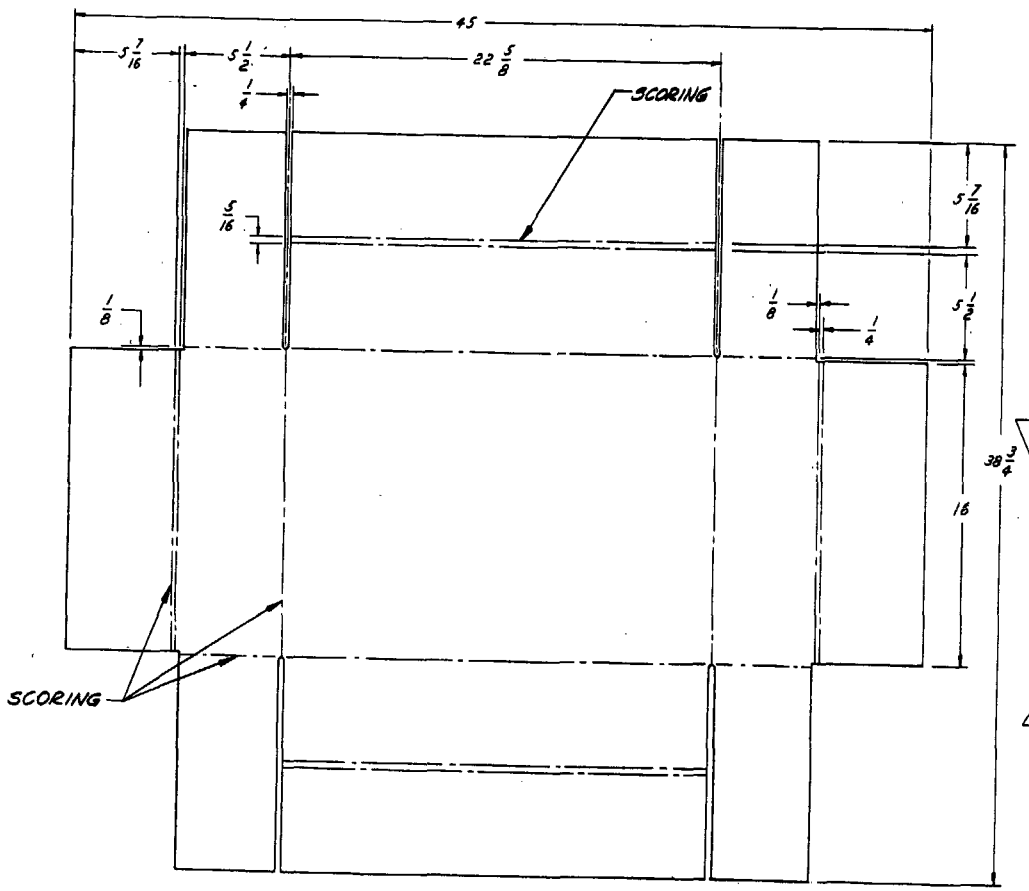

TOP AND BOTTOM SECTION

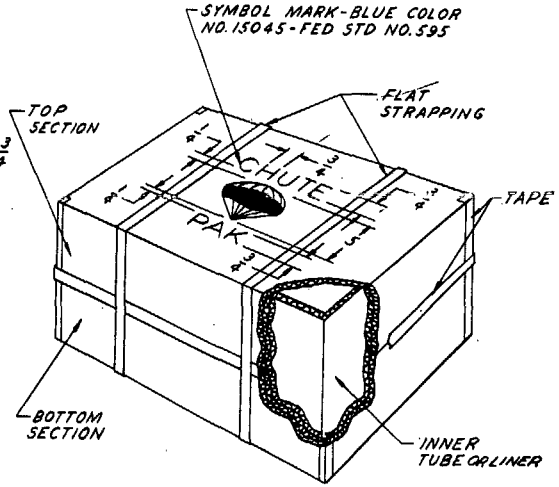

ASSEMBLED SHIPPING CONTAINER

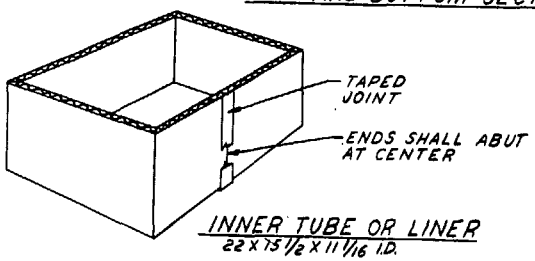

INNER TUBE OR LINER
22 X 15 1/2 X 11 1/16 I.D.

FIG. 1 THIS FIGURE IS A MINIATURE COPY OF AN ARMY NATICK DEVELOPMENT CENTER DRAWING AND IS FOR INFORMATION ONLY; THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS.

ITEM NO.	NAME	NO. REQD	MATERIAL	DWG. NO.

ITEM LIST

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FABRICATING TOLERANCES: (WIRE & METAL GAGES EXCLUDED) FRACTIONS DECIMALS ANGLES

SUPERSEDES DRAWING: 01-10-1-157 DATED 8 AUG 1964

DRAWN: R.P. WHITTY
CHECKED: G.A.
SCALE: FOR REF ONLY 1/2
PROJ ENGR: [illegible]
OWNER/DESIGN: [illegible]
APPROVED FOR THE Q.M.G.
DATE 24 SEP 1964
DRAFTING WORK ORDER NO. CD-20, CD-34, CD-36

DEPARTMENT OF THE ARMY
QUARTERMASTER CORPS
Q. M. RESEARCH & ENGINEERING COMMAND
NATICK, MASS.

BOX, FIBERBOARD, FOR PACKING PERSONNEL PARACHUTES AND CANOPY ASSEMBLIES

CODE 81337 | SPEC. NO. | SIZE C | DWG. NO. 10-1-157

MIL-B-43273B

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-B-43273B BOX, FIBERBOARD, FOR PACKING PERSONNEL PARACHUTES AND CANOPY ASSEMBLIES

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:03Z
Check the source to verify that this is the current version before use.