MILITARY SPECIFICATION

HOLDERS LABEL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers different shapes and designs of holders for labels.

1.2 **Classification.** The holders shall be in the following types:

Types I and II	— Plastic.
Types III thru X	— Brass.
Types XI and XII	— Steel.
Types XIII, XIV and XV	— Aluminum.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-504	—Plastic Sheet and Film, Cellulose Acetate.
L-P-506	—Plastic Sheet and Film, Polystyrene, Biaxially Oriented.
QQ-A-250	—Aluminum Alloy, Plate and Sheet; General Specification For.
QQ-B-613	—Brass, Leaded and Non-Leaded; Flat Products (Plate, Bar, Sheet and Strip).
QQ-S-698	— Steel, Sheet and Strip, Low-Carbon.
UU-T-111	— Tape; Paper, Gummed (Sealing and Securing).
PPP-B-566	—Boxes, Folding, Paperboard.
PPP-B-636	— Box, Fiberboard.
PPP-B-665	— Boxes, Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676	— Boxes, Set-up, Paperboard.

MILITARY

MIL-P-22748	— Plastic, Polyethylene and Copolymers, High Density, Molding and Extrusion Material.

STANDARDS

MILITARY

MIL-STD-105	— Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	— Marking for Shipment and Storage.

DRAWINGS

ARMY NATICK LABORATORIES

8-2-162	— Holders, Label, Types I thru V.
8-2-163	— Holders, Label, Types VI thru VIII.

FSC 9905

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

8-2-164 — Holders, Label, Types IX thru XII.

8-2-165 — Holders, Label, Types XIII thru XV.

(Miniature copies of Drawings 8-2-162, 8-2-163, 8-2-164 and 8-2-165, identified as figures 1, 2, 3 and 4 respectively, are attached for information purposes only).

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Preproduction sample approval. When specified (see 6.2), before production is commenced, a sample of the holders to be supplied shall be submitted to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification.

3.2 Material.

3.2.1 *Type I.* Type I holder shall be linear polyethylene, black color, conforming to type I or III of MIL-P-22748.

3.2.2 *Type II.* Type II holder shall be a clear, transparent, cellulose acetate conforming to type I of L-P-504; or clear, transparent, biaxially oriented polystyrene conforming to type I of L-P-506, except that the requirements for density, elongation, dissipation, dielectric, luminous transmittance and water vapor permeability shall not apply.

3.2.3 *Types III thru X.* Types III thru X holders shall be brass conforming to QQ-B-613.

3.2.4 *Type XI and XII.* Types XI and XII holders shall be steel conforming to QQ-S-698.

3.2.5 *Types XIII, XIV and XV.* Types XIII, XIV and XV holders shall be aluminum conforming to QQ-A-250.

3.3 Design and dimensions. All holders shall be constructed as shown in applicable drawings.

3.4 Color and finish. Color and finish shall be as shown in applicable drawings.

3.5 Workmanship. The holders shall be clean, free from rough edges, nicks, cuts, abrasions and scratches and shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When required, the preproduction sample submitted in accordance with 3.1 shall be inspected as specified in visual examination for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated. For purposes of sampling, an inspection lot for examination and tests shall consist of all holders of the same type submitted at one time. The sample unit shall be one holder.

4.3.1 *Inspection of materials and components.* The supplier is responsible for insuring that all materials and components used were manufactured and inspected in accordance with the requirements of this specification and of referenced specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

4.3.2 *Examination of the end item.* The defects found during the examination shall be scored in accordance with 4.3.2.1, 4.3.2.2 and 4.3.2.3. The applicable inspection levels and acceptable quality levels shall be as indicated in 4.3.2.4. The lot size shall be expressed in units of completed holders.

4.3.2.1 *Visual examination.* The finished holder shall be examined for defects in color, finish, design, appearance and workmanship. The sample unit shall be one completely fabricated holder.

Examine	Defect
Color and finish	Color or finish not as specified.
Design	Not in accordance with specified requirements.
Appearance and workmanship.	Not clean.
	Rough edges.
	Screw hole missing (when applicable).
	Any part missing.
	Edges or surface scratched, abraded or nicked.
	Any cut.
Plastic cover (when applicable)	Missing, not transparent and clear.
Plastic holder Type II	Not transparent.
	Not sealed properly.

4.3.2.2 *Dimensional examination.* The holders shall be examined for dimensional defects. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one complete holder.

4.3.2.3 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Weight	Weight of contents of intermediate package or shipping container exceeds requirement.

4.3.2.4 *Inspection levels and acceptable quality levels (AQLs) for examinations.* The inspection levels and the acceptable quality levels (AQLs) examined in defects per 100 units shall be as follows:

Examination paragraph	Inspection level	AQL
4.3.2.1	S-2	4.0
4.3.2.2	S-2	4.0
4.3.2.3	S-2	4.0

5. PREPARATION FOR DELIVERY

5.1 **Packaging.** Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Unit packaging.* Each metal holder (nuts tightened fingertight on studs and plastic cover in place, as applicable) shall be wrapped in kraft paper or placed in a gummed flap paper envelope or plastic bag. The wrap, envelope or bag shall be secured with gummed paper or pressure sensitive tape, adhesive, or by stapling. The plastic holders shall not require unit packaging.

5.1.1.2 *Intermediate packaging.* A quantity of holders of one type only, unit packaged as specified in 5.1.1.1, shall be packaged in a snug-fitting, folding, set-up, or metal-stayed paperboard box conforming to style III, type B, class A of PPP-B-566; type I, grade A, class A, style 4 of PPP-B-676; or style A of PPP-B-665, respectively. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to class 2 of UU-T-111, applied at the center of the length opening and extending along the bottom and up the sides at least 2 inches. The weight of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

the contents of each intermediate package shall not exceed 10 pounds.

5.1.2 *Level C.* Holders shall be packaged in accordance with the industry's practice.

5.2 **Packing.** Packing shall be level A, B or C as specified (see 6.2).

5.2.1 *Level A.* A quantity of holders of one type only, packaged as specified in 5.1, shall be packed in a snug fiberboard shipping container conforming to style RSC, V3c or V3s of PPP–B–636. Each shipping container shall be closed, waterproofed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.2 *Level B.* A quantity of holders of one type only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, variety SW, grade 275 of PPP–B–636. Each shipping container shall be closed in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.3 *Level C.* Holders, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL–STD–129.

5.3.1 *Unit package.* Unit packages shall be printed or stamped with the following identification information:

STOCK NUMBER
NOMENCLATURE
QUANTITY

6. NOTES

6.1 Intended use. The label holders are intended for use in instruction and for identification of military equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type required.

(c) Whether preproduction sample is required (see 3.1).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Custodians:
Army—GL
Navy—YD
Air Force—69

Review activities:
Army—MD
NavyYD

User activities:
Army—SM, MO
Navy—WP, MC

Preparing activity:
Army—GL

Project No. 9905–0044

Note. Reviewer and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

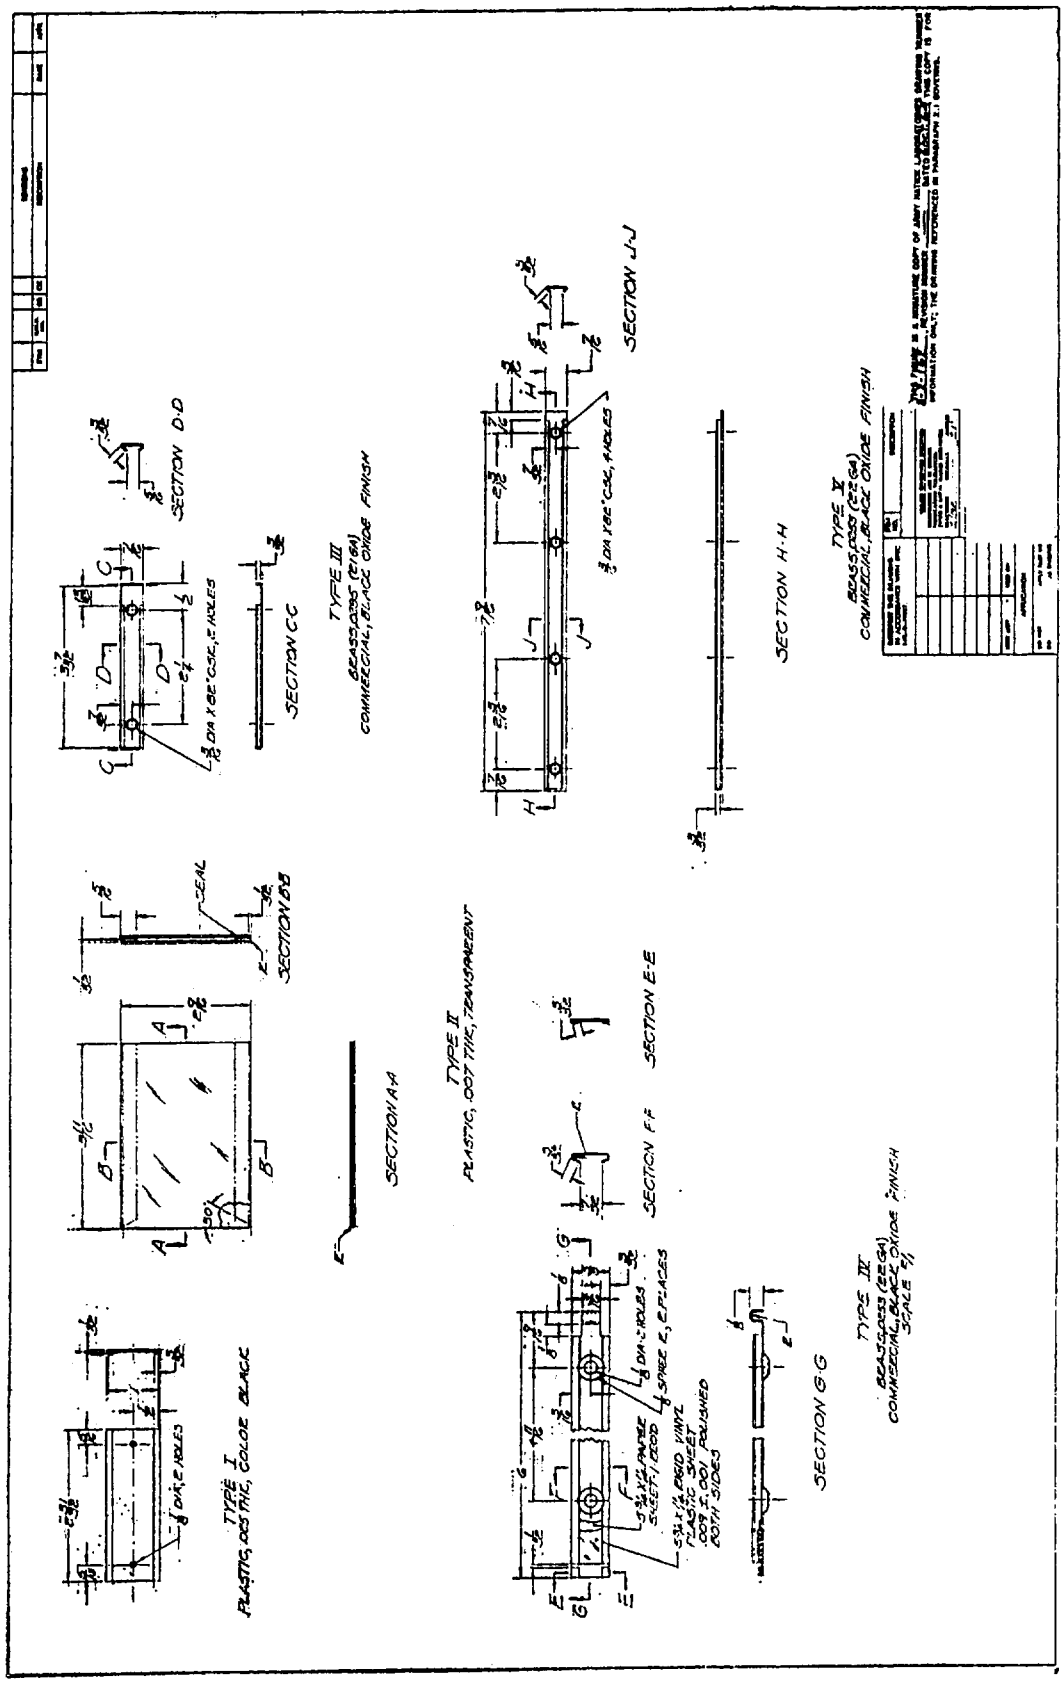


FIGURE 1. *Holders, label; types I, II, III, IV, and V.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

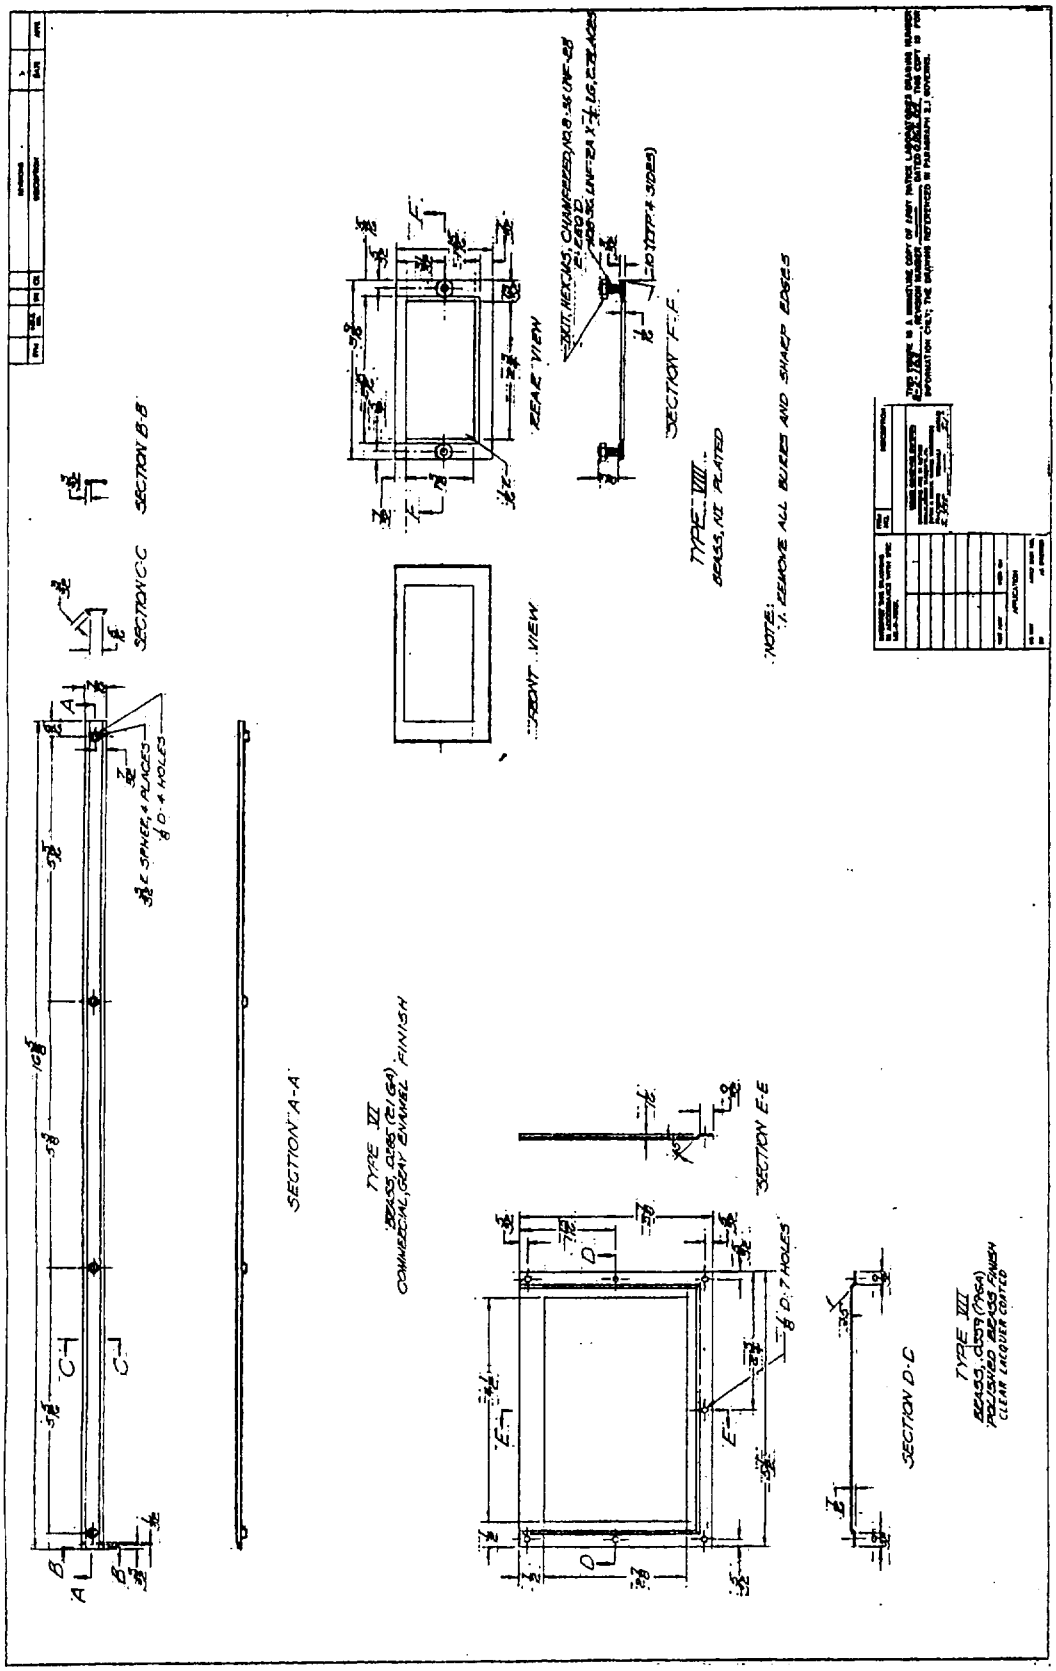


FIGURE 2. *Holders, label; types VI, VII, and VIII.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

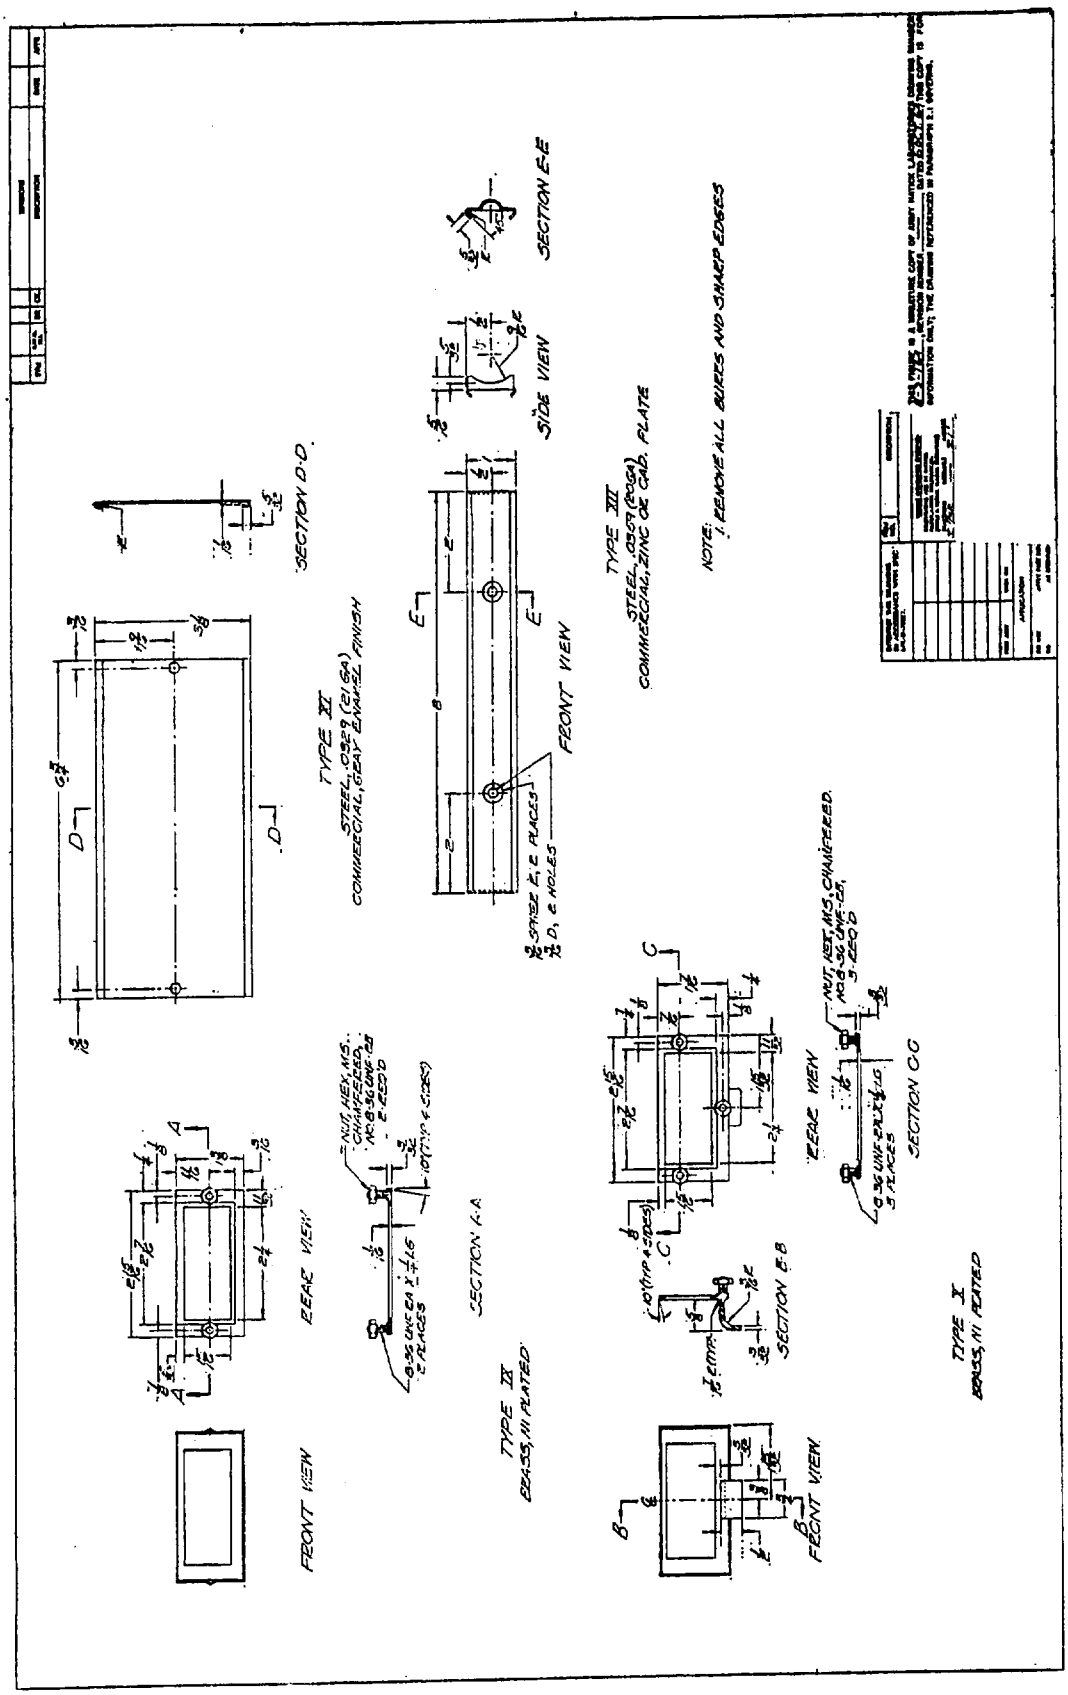


FIGURE 3. *Holders, label; types IX, X, XI, and XII.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.

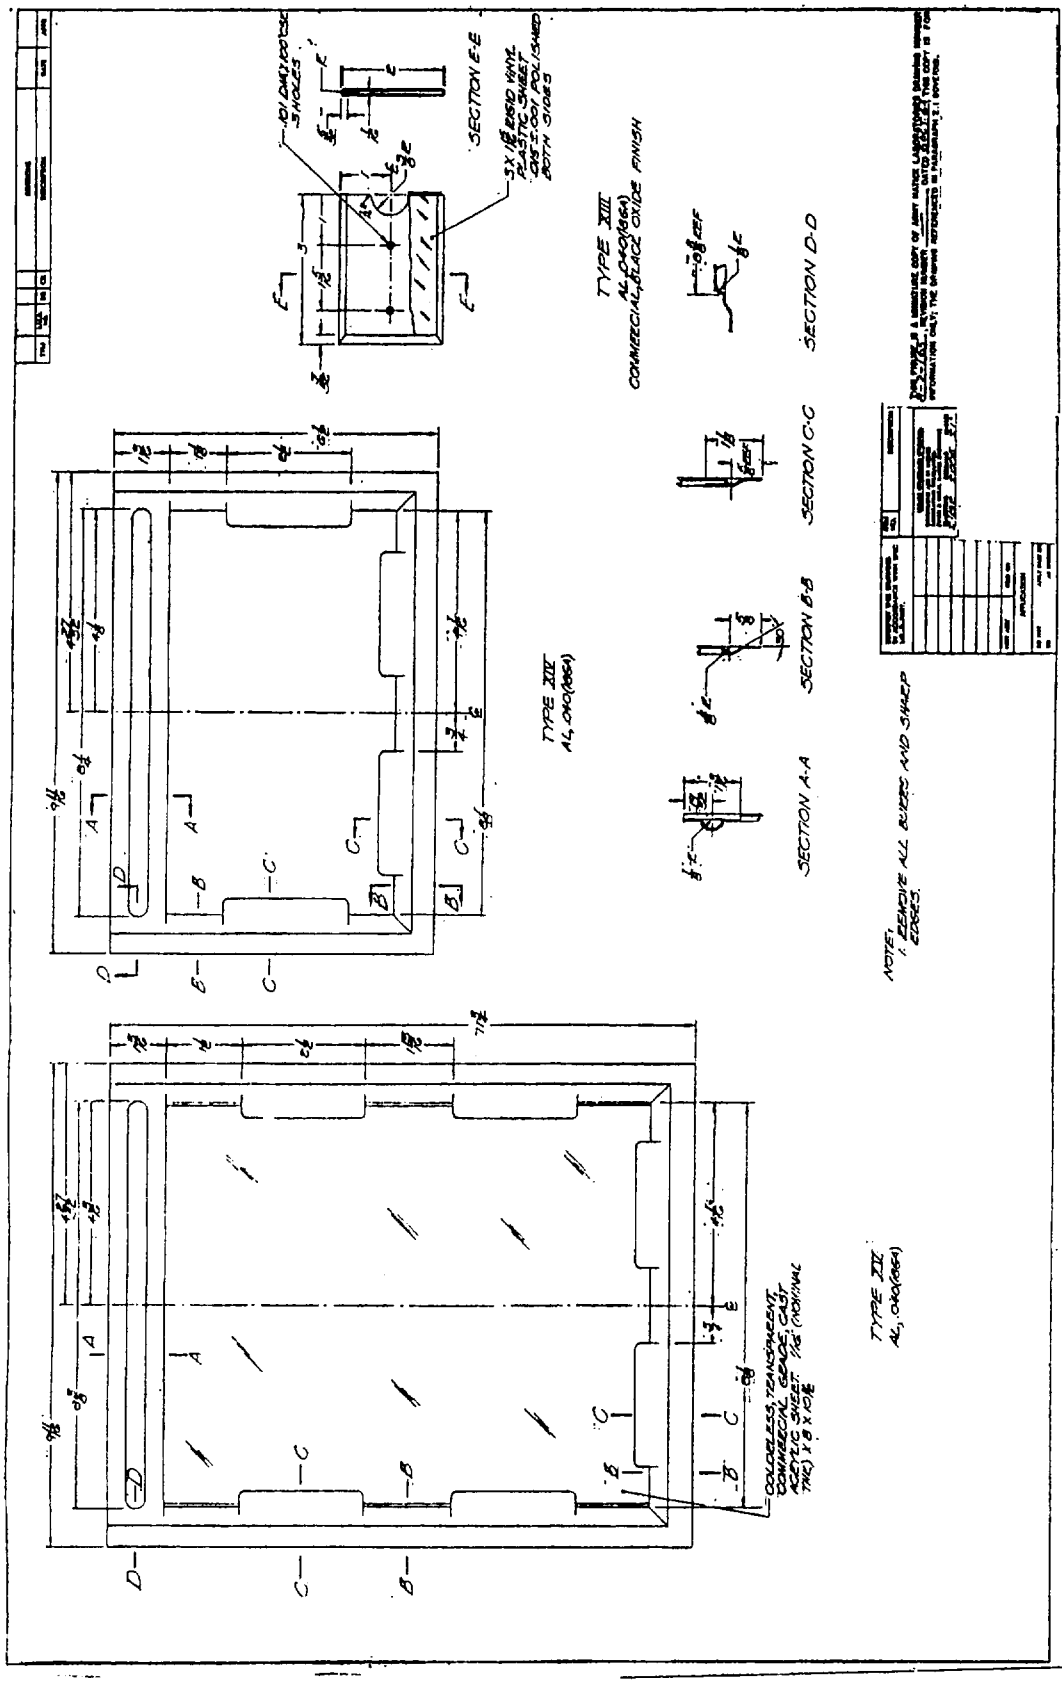


FIGURE 4. *Holders, label; types XIII, XIV, and XV.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:04Z
Check the source to verify that this is the current version before use.