MIL-S-43252A
6 December 1968
SUPERSEDING
MIL-S-43252
24 August 1964

MILITARY SPECIFICATION

SQUEEGEES, SILK SCREEN

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers wood block silk screen squeegees with a rubber blade.

1.2 Classification.- The squeegees covered by this specification shall be of the following sizes as specified (see 6.2).

Size 4	-	4-inches long
Size 8	-	8-inches long
Size 18-1/4	-	18-1/4 inches long

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-P-98	-	Paint; Stencil, Flat
TT-T-291	-	Thinner: Paint, Volatile Spirits (Petroleum-Spirits)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard, Corrugated and Solid,Sheet Stock (Container Grade), and Cut Shapes

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Test Method Std. No. 601 - Rubber: Sampling and Testing

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D2016-65 - Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2) the contractor shall submit a preproduction sample to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

* 3.2 Standard product.- The squeegees delivered under this specification shall be the manufacturer's current commercial product except for any changes necessary to comply with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

* 3.3 Materials.- Materials not definitely specified shall be of the quality used for the purpose in commercial practice.

* 3.3.1 Wood.- Wood shall be either hardwood or softwood, dried to a moisture content of not less than 8 percent, nor more than 12 percent when tested as specified in 4.3.2.1. The wood shall be free of knots, pith, shake, wane, checks, splits or cracks.

* 3.3.2 Rubber.- The rubber shall be synthetic solvent resistant type containing no coloring agent which will stain a white cloth when tested as specified in 4.4.1. The rubber shall have a durometer number of 60 ± 5 when tested as specified in 4.3.2.2.

* 3.4 Construction.- The squeegee shall conform to the requirements specified herein, and shall be similar to the design shown in figure 1. Figure 1 is intended for illustration purposes only and is not intended to preclude squeegees otherwise meeting the requirements of this specification. The block shall be fabricated of the wood specified in 3.3.1. The blade shall be fabricated of the rubber specified in 3.3.2 and shall be imbedded in a grove in the block. At the option of the supplier, the blade may be either fastened with brass round head wood screws as shown in figure 1, or two-piece bolts inserted through the blade and the block, or glued into the block. The blade shall not loosen, tear or pull out from the groove when tested as specified in 4.4.2. When specified (see 6.2) the squeegee shall be provided with end support pins. The end support pins, embedded in the rubber and located as shown on figure 1, shall be 1/4-inch steel headless screws 1-1/2 inches long.

* 3.5 Finish.- The squeegee blocks shall be finished in accordance with the manufacturer's current commercial practice.

* 3.6 Marking for identification.- The supplier shall permanently and legibly indent his name, or trademark, of such known character easily identifiable with said manufacturer, on each squeegee block.

* 3.7 Workmanship.- Blocks shall be free of rough or sharp edges, loose grain, cracks and splinters. Pointed ends of screws shall not protrude through the block. Blades shall be free of splits, chipped edges, tears and the blade shall not be bowed or twisted along the full length of the squeegee.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required it shall be examined for the defects in table I, specified dimensions, and tested as specified in 4.4.2.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 Intermediate testing.-

* 4.3.2.1 Moisture content of wood blocks.- The moisture content of wood specified in 3.3.1 shall be determined in accordance with ASTM-D2016-62 at time of assembly. The lot shall be all wood blanks prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one wood blank. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0 expressed in terms of defects per hundred units. When testing is performed by the electric moisture meter method, 3 determinations shall be made on each sample unit. The average of the 3 determinations shall be the moisture content of the sample unit.

* 4.3.2.2 Durometer number of rubber.- The durometer number of the rubber shall be determined by method 3021 of Federal Test Method Standard No. 601, to determine compliance with 3.3.2.

* 4.3.2.3 Color fastness of blades.- The color fastness of blades shall be determined prior to assembly when tested in 4.4.1. The lot shall be all blades offered for inspection at one time. The sample unit shall be one blade. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

4.3.3 End item inspection.- The lot shall consist of all squeegees of one size offered for inspection at one time. The sample unit shall be one completely fabricated squeegee.

* 4.3.3.1 Visual examination.- Examination shall be made of the end item for the defects in table I. The inspection level shall be level II with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE I.- Defects

Examine	Defect
Finish	Not finished as specified.
Workmanship	
Blocks	Knot, pith, wane, check, split or crack. Screw point protrudes (when applicable). End support pin missing (when required). Rough or sharp edges, loose grain, splinter.
Blade	Split, tear, chipped edge, bowed or twisted.
Marking	Missing, incomplete, not legible.

* 4.3.3.2 Dimensional examination.- Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.3.3.3 Testing of the end item.- The end item shall be tested as specified in 4.4.2. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packing and marking as required by section 5 of this specification are complied with. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units. Defects shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible, of improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Contents	Number per container is more or less than specified.

* 4.3.4.1 Examination of shipping container.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

* 4.4 Tests.-

* 4.4.1 Color fastness.- The blade shall be coated with stencil paint conforming to TT-P-98. The paint shall be removed with a thinner conforming to TT-T-291 and placed in water at 110 F. plus or minus 10 F. for a period of not less than 15 minutes. The blade shall be removed from the water and wiped with a white cloth. The cloth shall be examined to determine compliance with 3.3.2.

* 4.4.2 Blade retention test.- Clamp the block in a holding device, grasp the blade in one corner with another holding device and apply a pulling force of 10 pounds in a direction tending to pull the blade from the block. The test shall be repeated on the opposite corner of the blade. The blade shall be examined to determine compliance with 3.4.

5. PREPARATION FOR DELIVERY

5.1 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.1.1 Level A.- Twenty-four of the 18-1/4 inch size, forty-eight of the 8-inch size, or ninety-six of the 4-inch size squeegees shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, Grade V2s of PPP-B-636. Each shippigng container shall be closed, waterproofed by means of tape, and reinforced with steel strapping or tape banding in accordance with the appendix of PPP-B-636.

* 5.1.2 Level B.- Twenty-four of the 18-1/4-inch size, forty-eight of the 8-inch size, or ninety-six of the 4-inch size squeegees shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be securely closed in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

* 5.1.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP-F-320.

5.1.3 Level C.- Squeegees shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.2 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

* 6. NOTES

6.1 Intended use.- The squeegees covered by this specification are intended to spread ink in the silk screen printing process.

6.2 Ordering data procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size squeegee required (see 1.2).
(c) First article.- When preproduction sample is required (see 3.1).
(d) When end support pins are required (see 3.4).
(e) Selection of applicable level of packing (see 5.1).
(f) When weather-resistant grade fiberboard shipping containers are required for Level B packing (see 5.1.2.1).

6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Army - GL
Air Force - 84

User activities:


Army - ME, SM

Preparing activity:

Army - GL

Project No. 7920-0173

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.

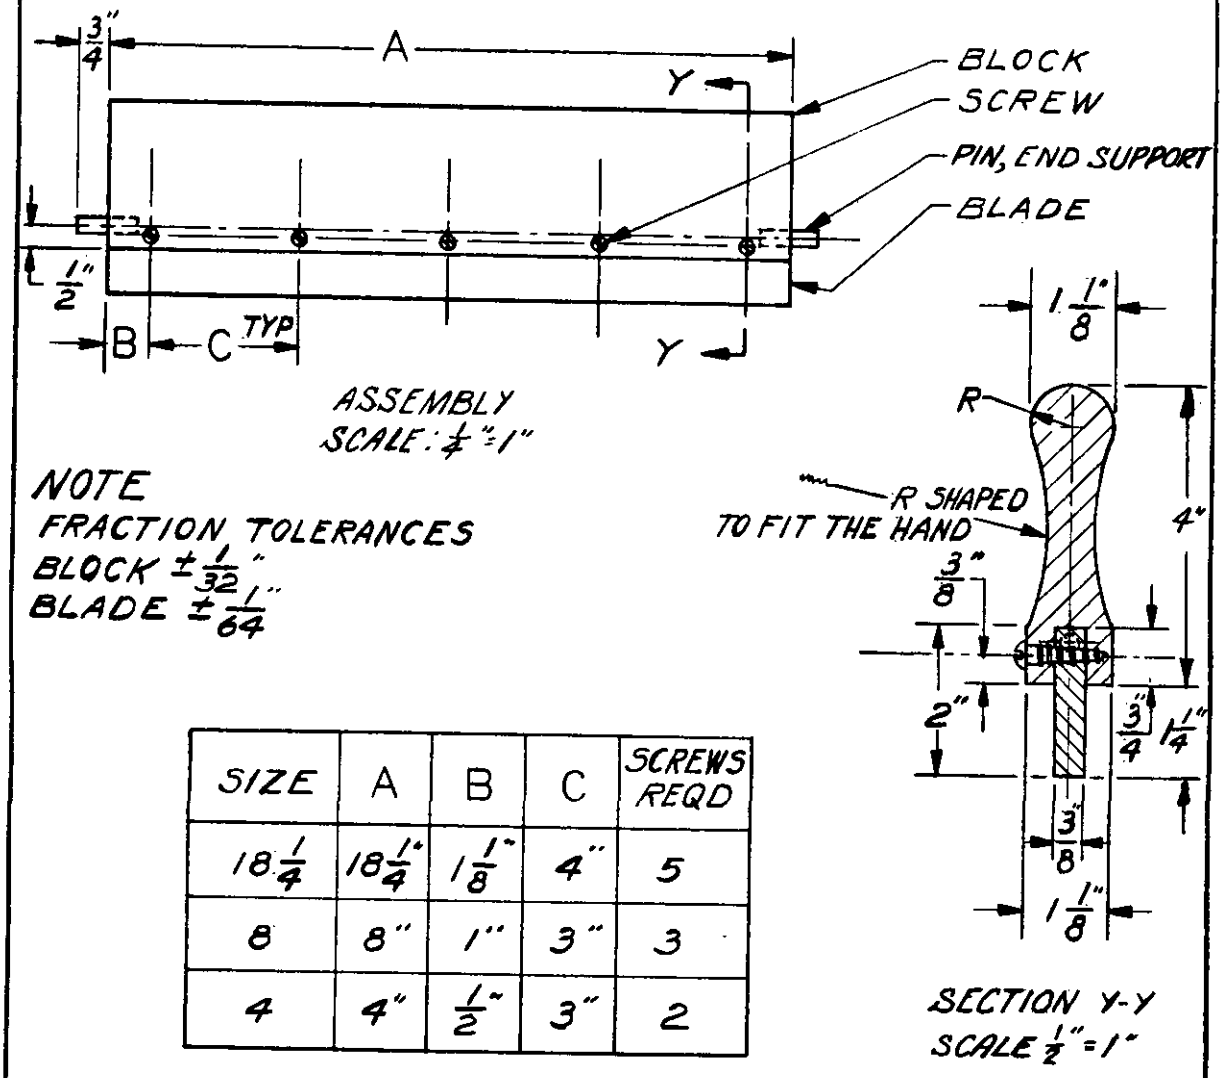

SIZE	A	B	C	SCREWS REQD
18 1/4	18 1/4"	1 1/8"	4"	5
8	8"	1"	3"	3
4	4"	1/2"	3"	2

FIGURE 1. SQUEEGEE, SILK SCREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:00Z
Check the source to verify that this is the current version before use.