MIL-T-43260B
6 February 1969
SUPERSEDING
MIL-T-43260A
25 July 1966

MILITARY SPECIFICATION

TRUNKS, LOCKER, BAND

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

* 1. SCOPE

* 1.1 Scope.- This specification covers band locker trunks.

1.2 Classification.- Trunks shall be of the following types, as specified (see 6.2):

Type I - Trunk, Wardrobe, Uniform

Type II - Trunk, Wardrobe, Hat

Type III - Trunk, Music Stand

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285 - Thread, Polyester.
RR-C-271 - Chains and Attachments, Welded, Weldless, and Roller Chain.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.

FSC 8460

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TT-E-529 - Enamel, Alkyd, Semi-Gloss.
TT-I-558 - Ink, Marking, Stencil, Opaque, for Nonporous Surfaces (Metals, Glass, Et Cetera).
TT-P-636 - Primer Coating, Synthetic, Wood and Ferrous Metal.
CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
CCC-D-950 - Dyeing and After Treating Processes For Cotton Cloths.
DDD-L-20 - Label: for Clothing, Equipage, And Tentage. (General Use).
MMM-A-181 - Adhesive, Phenol, Resorcinol, and Melamine Base.
PPP-B-636 - Box, Fiberboard.

MILITARY

MIL-C-496 - Clip, End, Strap.
MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-B-543 - Buckles, Tongueless and Web Strap.
MIL-F-10336 - Fiber Sheet, Vulcanized.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.
Fed. Std. No. 751 - Stitches, Seams and Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection By Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

DRAWINGS

ARMY NATICK LABORATORIES

2-5-68 - Trunks, Locker, Band, Type I, Uniform, Wardrobe.
2-5-69 - Trunks, Locker, Band; Type II, Hats, Wardrobe.
2-5-70 - Trunks, Locker, Band, Curtain Separator for Type II Trunk.
2-5-71 - Trunks, Locker, Band, Type III, Music Stand.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

(Miniature copies of Drawings 2-5-68, 2-5-69, 2-5-70, and 2-5-71, identified as figures 1 through 4 respectively, are attached for information purposes only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNITED STATES DEPARTMENT OF COMMERCE

Commercial Standard CS 35-61 - Hardwood Plywood

Commercial Standard CS 251-63 - Hardboard

NATIONAL BUREAU OF STANDARDS

U. S. Product Standard PS 1-66 Softwood Plywood/Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

Standard D 2016-65 - Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

3. REQUIREMENTS

* 3.1 First article sample. Unless otherwise specified (see 6.2), before production is commenced, a sample trunk conforming to this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

* 3.2 Materials.- The materials shall conform to the requirements specified hereinafter. Materials not definitely specified shall be of the quality used in current industry practice.

3.2.1 Wood.

* 3.2.1.1 Plywood - Plywood used in the fabrication of the trunks shall be 1/2 inch thick for the type I and II trunk and 3/8 inch thick for the type III trunk. Each of the panels for the trunks shall be one piece of plywood conforming to any one of the following:

(a) Hardwood, type I, grade 2, face and back low density veneers or better, regular sanded two sides, conforming to Commercial Standard CS 35-61.
(b) Softwood plywood, exterior type, grade B-B (not edge sealed nor mill-oiled), sanded two sides, conforming to Product Standard PS 1-66, or better.

3.2.1.2 Wood, solid.- Solid wood used in the fabrication of the support sticks may be any species. The wood shall be uniformly dried without brashness, case hardening or honeycombing to a moisture content of from 8 to 12 percent when tested as specified in 4.3.3.2. The wood shall be free from knots, warp, decay, holes, split, and twist.

3.2.2 Fiber sheet, vulcanized.- Vulcanized fiber shall conform to MIL-F-10336.

3.2.3 Adhesive.- Room temperature and intermediate temperature setting adhesive shall conform to type I or II of MMM-A-181, as applicable. High temperature setting adhesive shall conform to the requirements for type II of MMM-A-181 except that the requirements for shear strength by compression loading and for intermediate temperature cure cycle need not apply.

3.2.4 Pipe and floor flanges.- Pipe and floor flanges shall be steel, zinc-coated, commercially available, and threaded for assembly. The pipe shall be not less than 1-inch, iron pipe size.

3.2.5 Hardboard.- Hardboard shall conform to tempered type, smooth two sides of Comercial Standard CS 251. Hardwood thickness shall be 1/8 inch minimum.

3.2.6 Primer.- Primer shall conform to TT-P-636.

3.2.7 Enamel.- The enamel shall conform to class A of TT-E-529. The color shall be olive drab, conforming to Color No. X24087 of Fed. Std. No. 595.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

3.2.8 Stencil ink.- The stencil ink shall conform to TT-I-558. The color shall be black or white, as applicable (see 3.5.1 and 3.6).

3.2.9 Cloth, duck, cotton.- The cloth, before finishing, shall be 9.85 ounces per square yard, conforming to type III of CCC-C-419.

3.2.9.1 Color and treatment.- The cloth shall be Olive Drab No. 7 in color, and shall conform to type I, class C of CCC-D-950.

3.2.10 Webbing, textile, cotton.- The webbing shall be dyed Olive Drab No. 7, and shall conform to type IIb, class 3, 1 inch of MIL-W-530.

3.2.11 Thread, polyester.- The thread shall be type I or II, class 1, dyed shade S-1 (cable No. 66022) of V-T-285. The dyed thread shall show fastness to chlorine bleaching equal to or better than the standard shade sample (see 6.3). If no standard shade sample is available, the thread shall show good fastness to chlorine bleaching. The thread for all stitching shall conform to size FF.

3.2.12 Clips, end, strap.- The strap end clips shall conform to type I, class 1, 1 inch of MIL-C-496.

3.2.13 Buckle, double bar with slide.- The buckles shall conform to type III, style 3, construction A, class 1, 1 inch of MIL-B-543.

3.2.14 Chain.- The chain for the hinged lid shall conform to type II, class 3, weldless, grade No. 8 of RR-C-271.

3.2.15 Hardware.- All items of hardware shall be commercially available stay hinges, valance clamps, shoulders, corners, dowels, corner and valance, drawbolts, and body handles. The hardware shall be heavy duty trunk hardware, fabricated of steel. The ends of drawbolt loops shall be closed and welded. Except as otherwise specified herein, the nominal metal thicknesses of steel and steel wire diameters shall be as follows (commercial tolerances shall apply):

| | |
|---|---|
| Hinges | 0.0598 inch |
| Valance clamps | 0.0418 inch |
| Corner and valance | 0.0418 inch |
| Shoulders | 0.0418 inch |
| Corners | 0.0418 inch |
| Dowels | 0.0359 inch diameter |
| Drawbolt (body) | 0.0478 inch |
| Drawbolt (loop) | 0.1875 inch diameter |
| Handles (body) | 0.0598 inch |
| Handles (wire loop) | 0.3750 inch diameter |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

* 3.2.16 Rivets and washers.- Rivets and washers shall be commercially available items fabricated of steel and shall be zinc or cadmium plated. Rivets shall be oval head, solid, or tubular, and may be used interchangeably, except bifurcated rivets (without washers) may be used on the right angle bindings of the type III trunk in lieu of either solid or tubular rivets and washers. Washers for rivets shall conform to industry practice.

* 3.2.17 Nails or staples.- Nails shall be standard cement or resin coated box nails. The nails shall be of the size in compliance with industry practice. When used in lieu of nails as specified in 3.3, staples shall be steel, cement coated (flat wire), 1 inch long with 1/8-inch crown, 0.030 inch thick by 0.050 inch wide.

3.2.18 Trunk lock.- The trunk lock with staple shall be fabricated of steel and shall be brass plated. Metal thickness of lock body (upper and lower) shall be not less than 0.0418 inch. The diameter of wire for the staple shall be not less than 3/16 inch. The staple shall be an integral part of the lock, permitting the use of a padlock in addition to the lock's usual locking features. Two keys shall be provided for each lock.

3.3 Design and construction.- The trunks shall be similar in design to Drawings 2-5-68, 2-5-69, or 2-5-71, as applicable (drawings are descriptive but not restrictive), and shall conform to the requirements and dimensions specified herein. The trunk panels shall be fabricated of plywood specified in 3.2.1. The plywood shall be covered on both sides with vulcanized fiber specified in 3.2.2. The trunks shall be equipped with heavy duty trunk hardware in accordance with commercial practice, and bottom corners for trunks shall be knob type. The trunk panels shall be assembled at right angles by nailing or stapling. All hardware, except as otherwise specified herein, shall be assembled with rivets and washers. The trunk panels shall be aligned and assembled tightly so that the body, lid, doors, hardware, lock, tongue and groove binding, and metal valance on trunks shall mate and function properly.

3.3.1 Fiber covering.- All plywood panels, prior to covering with fiber, shall be cleaned of all dust and foreign matter to assure a smooth surface. The vulcanized fiber specified in 3.2.2 shall be bonded to the surfaces of the plywood to present clean, smooth surfaces, free from waves or irregularities. Each surface shall be covered by a single sheet of fiber. The thickness of the fiber for the type I and II trunks shall be 0.050 plus or minus 0.005 inch and for the type III shall be 0.020 plus or minus 0.002 inch. The adhesive bond of fiber to plywood shall show a fiber failure of not less than 95 percent before panels are primed or enameled, when tested as specified in 4.3.3.1. Application of adhesive to the surfaces, assembly periods, pressing time, pressure and curing temperature shall be in accordance with the adhesive manufacturer's recommendations. The fiber covered plywood panels shall be fabricated by either of the following processes:



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

(a) Unit process. The vulcanized fiber and wood veneers shall be glued with the same adhesive, and assembled, pressed and cured in one operation.
(b) Two step process. The vulcanized fiber shall be bonded to the plywood specified in 3.2.1 with any of the adhesives specified in 3.2.3.

3.3.1.1 Bindings.- Bindings for edges shall be fabricated of steel and shall be 0.0179 inch thick (26 gage). The bindings shall not interfere with opening or closing of trunks. Bindings shall be one piece, except that two pieces maximum may be furnished along each side, provided that ends are butted and are not visible after attachment of hardware. The ends of bindings at corners shall not be visible after attachment of hardware. Bindings shall be riveted tightly to edges and shall fit snugly in the areas between rivets.

* 3.3.1.1.1 Right angle.- Right angle bindings shall conform to material and construction requirements specified in 3.3.1.1, and shall be designed to fit the lids and bodies. The minimum width of each face shall be 1-1/4 inches. Right angle bindings shall be used on all exterior horizontal and vertical edges.

* 3.3.1.1.2 U-shape.- U-shape bindings shall conform to material and construction requirements specified in 3.3.1.1. The inside width of channel shall be consistent with the thickness of fiber covered panels and each leg of the binding shall be a minimum of 1-1/4 inches. The bindings shall be assembled in accordance with industry practice.

3.3.1.1.3 Tongue and groove binding.- The tongue and groove binding shall conform to material and construction requirements as specified in 3.3.1.1, except that bindings shall be formed in one unit with joining ends tightly butted or mitered, or may be assembled in four pieces (one on each side with corners mitered). Each leg of the binding shall be a minimum of 3/4 inch. The tongue length shall be 1/4 inch plus or minus 1/64 inch. The groove depth shall be sufficient to permit seating of tongue without forcing.

3.3.1.2 Metal valance.- Metal valance strips shall be fabricated of steel and shall be 0.0359 inch thick (20 gage). Valance strips shall consist of one piece along each side, except that two pieces maximum may be furnished along each side, provided that the ends are butted and are not visible after attachment of hardware. The metal valance strips shall be set to the edges of lids, doors, or body as applicable, and riveted tightly. Valance strips shall not bind against shoulders, doors or lids, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

3.3.1.2.1 Right angle.- Right angle valances shall conform to material and construction requirements as specified in 3.3.1.2 and shall have a minimum width of 1-1/4 inches on each face.

3.3.1.2.2 Flat.- Flat valances shall conform to material and construction requirements as specified in 3.3.1.2. The flat valance on door and lid of the type I trunk shall have a minimum width of 1-7/8 inches. The flat valance on the type II trunk shall have a minimum width of 1-1/4 inches.

3.3.1.3 Hardware.- The hardware, as specified in 3.2.15, shall be of a design to fit the trunk body, lid or doors as applicable. The stay hinges shall be butt or strap type. The hardware shall be securely and tightly assembled to the trunk by rivets and washers and shall align with mating components.

* 3.3.1.4 Driving of nails, staples, and rivets.- The holes for rivets in fiber, plywood, and hardware shall be not more than 0.015 inch greater than the diameter of rivets. Rivet length for rivets with washers shall be sufficient to permit a minimum of 1/16 inch clinch to securely set or head rivet ends by peeping or curling. Birfurcated or split rivets without washers that are curled or clinched against the wood or fiber shall be of sufficient length to permit inch clinch. Rivets, staples and nails, as applicable, shall be spaced in accordance with industry's practice. Washers shall be used in all locations where solid or tubular rivets are to be peened or curled against fiber. Cement coated box nails shall be driven with head flush against wood or fiber.

3.3.1.5 Sticks, support.- Support sticks for the compartment shall be made of wood specified in 3.2.1.2 and shall be minimum 3/4 inch square.

3.3.1.6 Trunk lock and keys.- The trunk lock and keys shall be as specified in 3.2.18. The lock shall be attached using solid rivets with washers. The hole for inner face of recessed lock seating shall be drilled cleanly and shall be free from rough edges or torn fiber covering. Padlocks shall not be furnished with trunks.

3.3.2 Detail construction requirements.-

* 3.3.2.1 Type I trunk.- The type I trunk, fabricated as specified in 3.3, shall have a hinged lid, two hinged doors, a clothes hanging bar, and shall be equipped with 25 trunk clothes hangers. The sides of the trunk shall each be equipped with two heavy duty, surface type, trunk carrying handles. Inside dimensions for the trunk shall be as follows: Length 42 inches plus or minus 1/4 inch, height 42 inches plus or minus 1/4 inch (with lid closed), and depth 22 inches plus or minus 1/4 inch. When tested as specified in 4.4.3, the trunk



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

shall show no evidence of cracked or split fiber covered plywood panels. Mating hardware shall align and function properly. Locks and catches shall be operative without use of force. The doors shall open and close without forcing. Rivets shall not pull out or become loose. Hanger bar shall not be loose or distorted, and the clothes hangers shall not be distorted.

3.3.2.1.1 Doors.- Doors shall be equipped with heavy duty trunk catches and three hinges on each door in accordance with commercial practice. Door edges shall have U-shaped bindings specified in 3.3.1.1.2. In the position of normal use, the left door shall have U-shaped binding on four edges, and the right door shall have U-shape binding on top, bottom and hinge edges. The remaining edge shall have a flat metal valance as specified in 3.3.1.2.2. The flat valance shall overlap the left side door a minimum of 5/8 inches, when positioned and riveted on the right hand door. The length of the flat valance shall be equal to the door height.

3.3.2.1.2 Lid.- The hinged lid, as shown on Drawing 2-5-68, shall have a sash chain conforming to chain specified in 3.2.14. The chain shall be attached to lid and side of trunk with eye bolts and washers. Length of chain shall be sufficient to permit lid to remain open and shall prevent lid from leaning back more than 20 degrees beyond the vertical. Length of eye bolts shall permit sufficient peening against washers on outside of trunk to prevent pull out, and the peened ends of eye bolt shall be free from burrs or sharp edges. The lid shall have a right angle valance on sides and back and a flat valance on the front. The flat valance on front of lid shall project a minimum of 5/8 inch and be flush with front surface of doors. The lid shall open and close freely on two stay hinges without binding and shall be in alignment with hardware, sides and doors.

3.3.2.1.3 Body.- The body of the trunk shall have right angle bindings as specified in 3.3.1.1.1 and as shown on Drawing 2-5-68.

3.3.2.1.4 Clothes hanging bar.- The clothes hanging bar, fabricated of pipe and with floor flanges specified in 3.2.4, shall be attached to the sides of the trunk equidistant from front and back and between 2-1/2 and 3 inches down from the top. The floor flanges shall be fastened with screws.

* 3.3.2.1.5 Clothes hangers.- Clothes hangers shall be commercially available, heavy duty trunk clothes hangers, fabricated of not less than 11-1/2 gage steel wire, or a combination of wood with a heavy duty steel hook strap. Steel components of hangers shall be nickel or cadmium plated or shall have a baked enamel finish. The wood shall be coated in accordance with industry's practice. The number of hangers per trunk shall be a minimum of 25.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

3.3.2.2 Type II trunk.- The type II trunk, fabricated as specified in 3.3, shall have two equally dimensioned sides, hinged to open in the middle on four hinges. Each side shall be equipped with hat compartment units of egg crate construction. One half of the trunk shall have a full length curtain attached to six footman loops to retain hats in assigned cubicles. Both sides of the trunk shall be equipped with two, heavy duty, trunk carrying handles. Inside dimensions for each half of the trunk shall be as follows: length 35 inches plus or minus 1/4 inch, height 63 inches plus or minus 1/4 inch, and depth 12-1/4 inches plus or minus 1/4 inch. When tested as specified in 4.4.3, the trunk shall show no evidence of cracked or split fiber covered plywood panels, hardboard or support sticks. Mating hardware shall align and function properly, lock shall be operative without the use of force, and the trunk shall open and close without forcing. The rivets and footman loops shall not pull out or become loose, and support sticks shall remain in place.

3.3.2.2.1 Compartment units.- The compartment units of egg crate construction shall be fabricated of hardboard specified in 3.2.5, consisting of 27 equally sized cubicles. The inside dimensions of the cubicles shall be approximately 11-5/8 inches long, 12 inches deep and 7 inches high. The units shall be inserted with slotted edges of the horizontal members against the back of the trunk and shall be a tight fit. The compartment units outer horizontal members shall set on wood support sticks specified in 3.3.1.5. The support sticks shall be nailed to the sides of the trunk, with not less than four nails in each stick. The front end of support sticks shall not protrude beyond front edges of the compartment unit. Each compartment unit shall be held in place by nailing horizontal members to each support stick with not less than two nails. Front edges of all compartment unit cubicles shall be rounded smooth.

3.3.2.2.2 Body.- The body of the trunk shall have right angle bindings and valances as specified in 3.3.1.1.1 and 3.3.1.2.2 respectively.

3.3.2.2.2.1 Footman loops.- Footman loops shall be forged steel or malleable iron, commercially available, designed to permit the use of a 1 inch wide strap. The footman loops shall be attached in six places (three-upper and three-lower) with wood screws. Screws shall be of sufficient length to hold footman loops in place.

3.3.2.2.3 Curtain.- The curtain shall be fabricated as shown on Drawing 2-5-70, of the material specified in 3.2.9 through 3.2.13 inclusive. The attaching components shall align without stretching of curtain or use of undue force on straps, buckles or footman loops.

3.3.2.2.3.1 Machine stitching.- All stitching shall conform to type 301 of Fed. Std. No. 751, 5 to 7 stitches per inch. Thread shall be as specified in 3.2.11. Thread breaks in stitching shall be overstitched not less than 1 inch at each break. Stitching shall be overstitched not less than 1 inch at the



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

ends except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be trimmed. Seam allowances shall be maintained with seams properly sewn so that no runoffs, twists, pleats, puckers or open seams will result.

3.3.2.2.3.2 Setting of end clips.- Webbing specified in 3.2.11 for the strap retainer shall be inserted the full depth of the clip specified in 3.2.13. The clips shall be securely attached without cutting the webbing and the webbing shall lie flat at the point of entrance.

* 3.3.2.3 Type III trunk.- The type III trunk, fabricated as specified in 3.3, shall consist of a body and nonremovable lid with two hinges. The body of the trunk shall be equipped with two heavy duty, trunk surface handles. Inside dimemsions for trunk, including the closed lid, shall be as follows: Length 31 inches plus or minus 1/4 inch, width 17 inches plus or minus 1/4 inch and depth 13 inches plus or minus 1/4 inch. The lid depth shall be 3 inches plus or minus 1/4 inch. When tested as specified in 4.4.3, the trunk shall show no evidence of cracked or split fiber covered plywood panels. Mating hardware shall align and function properly, lock shall be operative without forcing, and the lid shall open and close without use of force. The rivets shall not pull out or become loose.

3.3.2.3.1 Body.- The body of the trunk shall have right angle bindings as specified in 3.3.1.1.1 and a tongue binding on seating edge as specified in 3.3.1.1.3. The binding shall be a tight fit to plywood covered edge.

3.3.2.3.2 Lid.- The lid of the trunk shall have right angle bindings as specified in 3.3.1.1.1 and a grooved binding on seating edge as specified in 3.3.1.1.3. The binding shall be a tight fit to plywood covered edge. The corners of the lid shall have corner and edge hardware as shown on Drawing 2-5-71, or corner and valance hardware may be used.

3.4 Finish.-

3.4.1 Metal surface preparation.- Prior to priming, the surfaces of steel components (except nails, staples, rivets, washers, and screws) shall be given a cleaning and surface preparation conforming to type I or II of TT-C-490.

3.4.2 Priming.-

3.4.2.1 Fiber covered surfaces.- Prior to attachment of bindings, valances, lock, hardware, footman loops, hanger bar and hat compartment units, a coat of primer specified in 3.2.6 shall be applied to all inside and outside surfaces of the trunk. The prime coat shall level out to produce a dry film without runs,



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

wrinkles, streaks or areas of no film, and shall be free from grit or coarse particles. Forced drying is permitted, providing that a surface temperature of 140 F. is not exceeded and the relative humidity of surrounding air is maintained at 30 to 50 percent.

3.4.2.2 Metal parts.- Prior to attaching, all metal parts, excluding rivets, nails, staples, washers, screws, hanger bar assembly and trunk lock, shall be given a coat of primer specified in 3.2.6. Baking of the primer is permissible. The prime coat shall be as specified in 3.4.2.1.

3.4.3 Enameling.- After attachment of hardware, footman loops, screws, support sticks, bindings and valances, the complete trunk (excluding the lock, sash chain assembly, hanger bar assembly, curtain and hat compartment units) shall be given a coat of enamel specified in 3.2.7. All surfaces shall be dry before attaching sash chain assembly, hanger bar assembly, curtain and lock, or before stacking or packing. When tested as specified in 4.4.2, the lid, body and doors shall not stick at surfaces that are in contact when trunk is locked, and there shall be no bare metal surfaces. The lid, body and doors shall not require the use of a tool in opening. Parting agents, such as beeswax, may be applied to contacting surfaces to meet this requirement.

3.5 Marking for identification.-

* 3.5.1 Trunk exterior.- The trunk exterior shall be marked in the locations shown on Drawings 2-5-68 through 2-5-71, using black ink specified in 3.2.8. Marking shall be in accordance with MIL-STD-130 and shall contain the following information:

Date of Manufacture

Nomenclature

Contract order number

Manufacturers' identification or trade mark

U.S.

3.5.2 Type II trunk separator curtain.- The type II trunk separator curtain identification marking shown on Drawing 2-5-70 shall conform to the requirements for type IV, class 5 labels of DDD-L-20. In addition, the application of the letters "U.S." in the size characters and in the location shown on the drawing shall conform to type IV, class 9 of DDD-L-20. Fastness for the class markings shall be as specified for class 5 labels.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

3.6 Other marking.- In addition to exterior marking specified in 3.5.1, arrows shall be stenciled on front, sides and back with white ink specified in 3.2.8. The length of arrow shafts shall be not less than 5 inches, and the width not less than 1 inch.

3.7 Workmanship.- The completed trunks shall be free from sharp edges, slivers or burrs. Fiber covering shall be free from tears and scuffs. Wood parts shall not be split nor shall nail or screw points protrude through wood or fiber. Compartment units front edges shall not be frayed or ragged. Enameling shall be dry, free from runs, wrinkles, streaks, areas of no film, and grit or coarse particles imbedded under finish.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table II, dimensions specified, and tested in accordance with 4.4.2.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2. In-process inspection.- Inspection shall be made during the manufacturing process for the requirements specified in table I to establish that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and process.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE I.- In-process inspection

| Requirement, operation, or assembly | Requirement paragraph |
|---|---|
| Panels (one piece plywood construction) | 3.2.1 |
| Cleaning of plywood surfaces | 3.3.1 |
| Nails flush against plywood or fiber | 3.3.1.4 |
| Diameter of rivet holes | 3.3.1.4 |
| Support sticks are free from knots, warp, decay, holes, splits, twists | 3.3.1.5 |
| Metal surface preparation | 3.4.1 |
| Primer application | 3.4.2 |

4.3.3 Intermediate testing.-

4.3.3.1 Vulcanized fiber adhesion test. The test specified in 4.4.1 shall be performed on fiber covered plywood to determine compliance with 3.3.1. The inspection lot shall be all the fiber covered plywood offered for inspection at one time. The sample unit shall be five specimens, 4 inches square, each selected from a different piece and from different locations on the fiber covered plywood. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5 defects, expressed in terms of defects per hundred units.

* 4.3.3.2 Testing for moisture content of wood.- Moisture content of wood requirement in 3.2.1.2 shall be determined in accordance with American Society for Testing and Materials Standard D 2016-65 at time of assembly, except when testing is performed by the electric moisture method, three determinations shall be made of the moisture content of the sample unit. The lot shall be all machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one piece of wood. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0, expressed in defects per hundred units.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

4.3.4 End item inspection.- The inspection lot shall consist of all completely fabricated trunks of one type offered for inspection at one time. The sample unit shall be one completely fabricated trunk.

* 4.3.4.1 Visual examination.- Examination of the trunks shall be in accordance with the classification of defects in table II. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

| Examine | Defect | Category Major | Category Minor |
|---|---|---|---|
| Finish (all components) | Not finished | X | |
| | Wrong type | | X |
| | Not a close match to specified color | | X |
| | Not adherent, e.g., blistered, peeled or flaked | | X |
| | Not smooth and uniform, e.g., run, drop streak or thin film coat (primer coat shows through) | | X |
| | Area of no film | X | |
| | Wet or tacky | | X |
| | Foreign matter imbedded | | X |
| Construction workmanship (general) | Fiber covering contains bubble, gouge, tear, hole, wave, ripple or seam | | X |
| | Trunk not square, e.g., panels not assembled at right angles | X | |
| | Lock missing, broken, damaged, split, or will not function: | | |
| | 1 key missing | | X |
| | 2 keys missing | X | |
| | Any component missing, broken, twisted, bent out of shape or malformed (not otherwise classified herein) | X | |
| | Component not in specified location, is misaligned or will not mate with its mating component | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

| Examine | Defect | Category Major | Category Minor |
|---|---|---|---|
| Construction workmanship (general) (cont'd) | Any component not securely attached | X | |
| | Any knot, hole, decay, warp, split, twist or splinter in wooden component | X | |
| Attachment of valances and bindings | Binding interferes with opening or closing of trunk | X | |
| | More than two pieces of edge binding on any side (except tongue and groove binding) | | X |
| | Tongue and groove bindings consist of more than one piece per side | | X |
| | Ends of binding not butted where required | | X |
| | Ends of binding are visible after assembly of hardware | | X |
| | Corners of tongue and groove binding are not mitered or butted | | X |
| | Any binding not a snug fit to trunk | | X |
| Rivets | Not type specified | | X |
| | Head cocked, e.g., not flush with component | | X |
| | Wrong size, e.g., insufficient stock to permit adequate curl or peen | | X |
| | Solid or tubular rivet peened or curled against fiber | | X |
| | Peening or curling results in sharp rough surface | | X |
| | Not peened or curled, e.g., can be removed by hand | X | |
| | Rivet does not secure component snugly against the trunk | | X |
| | One rivet missing | | X |
| | Two or more rivets missing | X | |
| Washers, as applicable | Missing | | X |
| | Wrong size | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

| Examine | Defects | Category Major | Minor |
|---|---|---|---|
| Nails and staples | Not as specified | X | |
| | Points protruding | | X |
| Drawbolt | End not closed and not welded | | X |
| Type I trunk | Lid or door does not function, e.g., will not open or close without binding | | X |
| | Clothes hanging bar missing, misplaced; bent or damaged | X | |
| | One or more clothes hangers missing | | X |
| | Hanger wrong type or size; bent out of shape or broken | | X |
| | Door catch, hinge, handle, edge, or other component missing or damaged | X | |
| | Flat valance overlaps less then 5/8 inch | | X |
| | Valance less than 1-7/8 inches wide | | X |
| | Chain missing on lid | X | |
| | Chain permanently kinked | | X |
| | Chain does not permit lid to remain in open position, or permits lid to lean back more than 20 degrees from vertical (check visually) | | X |
| | Right angle valance missing on side or back of lid | X | |
| | Flat valance missing on front of lid | X | |
| | Valance projects less than 5/8 inch | | X |
| | Valance not flush with front surfaces of doors | | X |
| | Right angle binding missing from body | X | |
| | Right angle binding is less than 1-1/4 inch wide | | X |
| Type II trunk | Sides not equally dimensioned (check visually) | X | |
| | Hinge missing (4 required), broken or damaged | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

| Examine | Defects | Category Major | Minor |
|---|---|---|---|
| Type II trunk (cont'd) | Right angle binding or valance missing or damaged | X | |
| | Valance less than 1-1/4 inches wide | | X |
| | Handle missing, broken or damaged | X | |
| Compartment unit | More or less than 27 cubicles | X | |
| | Cubicles not same size | X | |
| | "Egg crate" component is not constructed of hardboard | X | |
| | Hardboard is not smooth on two sides | | X |
| | Hardboard contains hole, sliver, splinter or abrasion mark | | X |
| | Slotted end of horizontal member not at the back of the trunk | | X |
| | Slotted members are not a tight fit | | X |
| | Horizontal member not set on wooden support stick | | X |
| | Support stick is not secured to side of trunk by nails | X | |
| | Horizontal member not nailed to support stick | | X |
| | Less than two nails per stick | | X |
| | Support stick protrudes beyond front edge of compartment | | X |
| | Front edge of compartment unit not rounded smooth | | X |
| Footman loops | Missing or damaged | X | |
| | Not attached with wood screws | | X |
| | One screw missing | | X |
| | More than one screw missing | X | |
| | Point of screw protrudes | | X |
| | Not securely attached | | X |
| Separator curtain | Missing | X | |
| | Hole, rip or tear | X | |
| | Shade bar | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

| Examine | Defects | Category Major | Minor |
|---|---|---|---|
| Webbing (Separator curtain straps and chapes) | Missing | X | |
| | Abrasion mark, resulting in a weak place | X | |
| | Broken or missing end or pick | | X |
| | Hole, cut or tear | X | |
| | Multiple floats | | X |
| End clips | Missing or damaged | | X |
| | Improperly clinched | | X |
| | Webbing not inserted into full length of clip | | X |
| | Wrong type, size or class | | X |
| | Finish not black chemical | | X |
| Buckle | Finish not black chemical | | X |
| | Wrong type, style, class or size | | X |
| | Damaged or broken (will not operate) | | X |
| Seams and stitching | Not specified type | | X |
| | Less than five stitches per inch | | X |
| | More than seven stitches per inch | | X |
| | Thread break or end not overstitched | | X |
| | Overstitching less than 1 inch | | X |
| | Thread tension results in loose stitching | | X |
| | Thread end not trimmed | | X |
| | Runoff, twist, pleat, pucker, open seam, or seam margin not maintained | | X |
| Hardware (type III trunk) | Hinge missing, damaged, or defective | X | |
| | Handle missing, broken or damaged | X | |
| | Wrong type or size | | X |
| | Corners of lid not equipped with the specified hardware | | X |
| | Right angle or tongue and groove binding missing | X | |
| | Binding not a tight fit to panel | | X |
| | Exposed width of each leg of tongue and groove binding is less than 3/4 inch | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

| Examine | Defects | Category Major | Minor |
|---|---|---|---|
| Marking (Identifications and arrows) | Missing, misspelled, illegible, wrong type, color or size, not applied or located as specified | | X |

* 4.3.4.2 Dimensional examination.- An examination shall be made on a completed trunk of each type, as applicable, to determine compliance with dimensions specified. Any dimension that is not within the specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

* 4.3.5 End item testing.- The end item shall be tested as specified in 4.4.2 and 4.4.3. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.6 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

TABLE III.- Examination of packaging, packing, and marking

| Examine | Defects |
|---|---|
| Marking (exterior) | Omitted, incorrect, illegible, of improper size, location, sequence, or method of application |
| Materials | Any component missing<br>Any component damaged |
| Workmanship | Inadequate application of components, such as incomplete locking, cushioning, closure of container flaps, inadequate stapling |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

* 4.4 Tests.-

* 4.4.1 Vulcanized fiber adhesion test.- The specimens specified in 4.3.3.1 shall be immersed in boiling water for 3 hours. The specimens shall be cooled in 70 F. plus or minus 5 F. water for a period of 10 minutes and immediately examined, while wet, for delamination or weakness of bond at the glue line of fiber and plywood. Specimens passing the test for delamination or weakness at glue line shall be subjected, while wet, to the following test. The sharp edge of a pocket-knife blade or similar instrument shall be inserted at the glue line and the fiber covering the plywood shall be peeled off (between the thumb and knife blade). The percentage of fiber failure (fibrous material adhering to glue line) shall be calculated for compliance with 3.3.1.

* 4.4.2 Paint sticking test.- A closed and locked trunk(s) of the applicable type(s) shall be allowed to stand a minimum of 8 hours in an area with the temperature at 70 F. to 90 F. The trunk shall then be opened to determine compliance with 3.4.3. Any nonconformance shall constitute a defect.

* 4.4.3 Drop test.- The trunk shall be loaded with not less than 100 pounds of evenly distributed weight in and on the trunk areas of normal use. The trunk, with door and lid closed and locked, shall be raised and dropped from a height of 2 feet on a flat steel plate or cement floor, alternately on each of the trunk's four bottom corners. The trunk shall then be opened and examined to determine compliance with requirements specified in 3.3.2.1, 3.3.2.2, or 3.3.2.3, as applicable. Dents on metal corners or other metal edge protectors, caused by testing, shall not be classed as a defect.

## 5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A.

5.1.1 Level A.- The hangers for type I trunk shall be bundled and secured to the rod with cloth tape or twine. Each trunk shall be locked. The keys shall be wired together and secured to the staple with minimum 0.058 inch diameter annealed wire. All protruding components such as hinges, staples, et cetera, shall be covered with cushioning material.

5.2 Packing.- Packing shall be level A, or C as specified (see 6.2).

* 5.2.1 Level A.- Each trunk, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636, except that the dimensional limitations shall be waived. Each shipping container shall be closed in accordance with the appendix of PPP-B-636.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

5.2.2 Level C.- Each trunk, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use.- The locker trunks covered by this specification are intended for use by the military for the storage of band uniforms, band hats, and folding type band music stands, while in garrison or on tour.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of trunk required (see 1.2).
(c) First article. When a preproduction sample is not required (see 3.1).
(d) Selection of applicable level of packing (see 5.2).

6.3 For access to a standard shade sample of thread, contact the procuring office issuing the invitation for bids.

6.4 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 82

Review activities:

Air Force - 82, 85

User activity:

Army - SM


Preparing activity:


Army - GL

Project No. 8460-0028



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.






| ITEM NO | NAME | NO REQD | MATERIAL | DRG NO |
|---|---|---|---|---|
| | ITEM LIST | | | |


THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORY'S DRAWING NUMBER 7-2-27, REVISION NUMBER F, DATED 12 MAY 72. THIS COPY IS FOR INFORMATION ONLY. THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE - 1

TRUNKS, LOCKER, BAND; TYPE I, UNIFORM WARDROBE



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

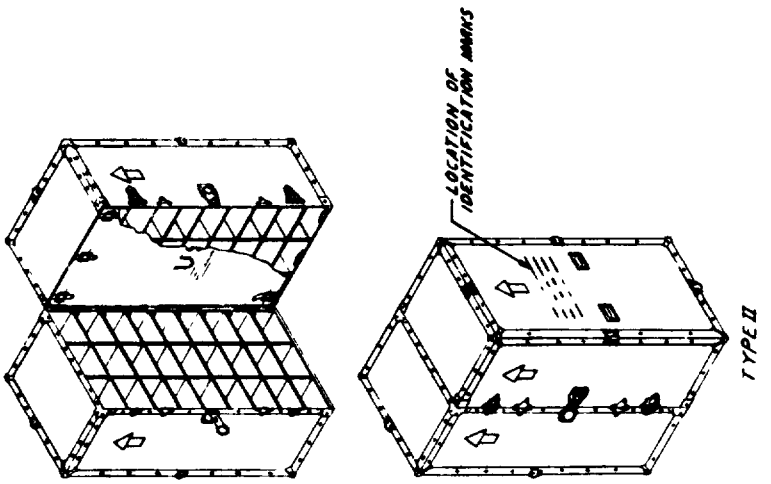


| ITEM NO | DESCRIPTION | NO REQD | MATERIAL | MATL SPEC | NO |
|---|---|---|---|---|---|

ITEM LIST

THIS FIGURE IS A MINIATURE COPY OF ARMY MATICK LABORATORY'S DRAWING NUMBER 7-2-17, REVISION NUMBER ___, DATED 4 FEB 57, THIS COPY IS FOR INFORMATION ONLY, THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS

MAIN TITLE

TRUNKS, LOCKER, BAND, TYPE II, HATS, WARDROBE

FIGURE - 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.


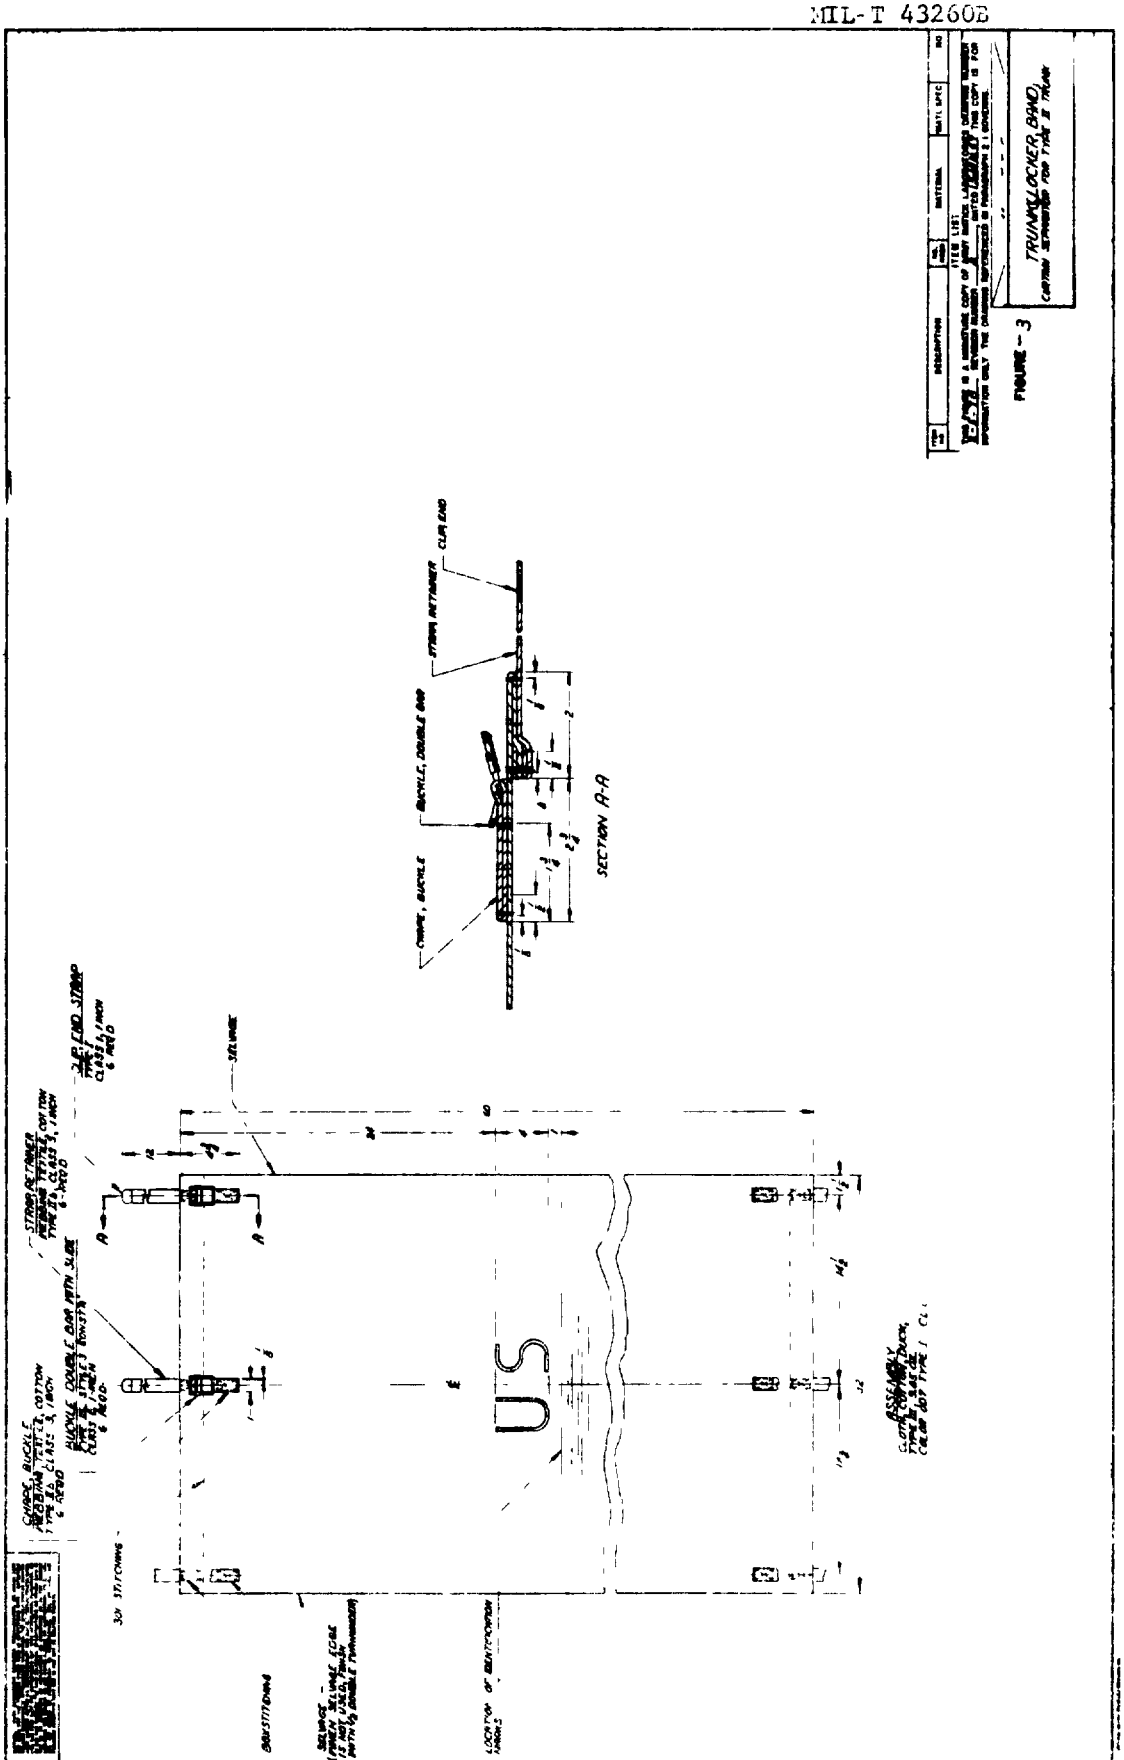



FIGURE - 3

TRUNK LOCKER BAND



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

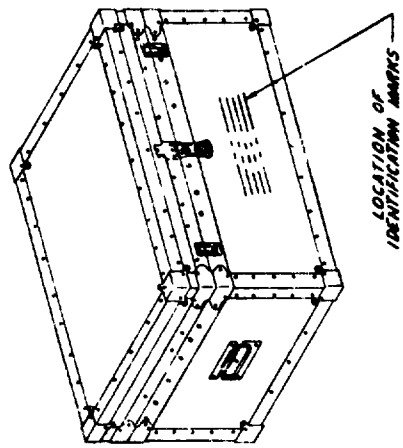


TYPE III

ITEM LIST

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER TE-FY1, REVISION NUMBER A, DATED 12 MAY 87. THIS COPY IS FOR INFORMATION ONLY. THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

| ITEM NO. | NAME | NO. REQD | MATERIAL | DWG NO |
|---|---|---|---|---|
| | | | | |

MAIN TITLE

TRUNK&LOCKER, BAND; TYPE III, MUSIC STAND

FIGURE - 4





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

"to det this form, cut along this line"

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

**INSTRUCTIONS**

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Trunks, Locker, Band MIL-T-43260B

| ORGANIZATION | CITY AND STATE |
|---|---|
| | |

| CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT |
|---|---|---|
| | | $ |

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

| SUBMITTED BY *(Printed or typed name and activity)* | DATE |
|---|---|
| | |

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.