MIL-U-43262D
26 January 1988
SUPERSEDING
MIL-U-43262C
29 June 1984

MILITARY SPECIFICATION

UNDERSHIRTS, COLD WEATHER, MEN'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers men's cold weather, wool/cotton undershirts.

1.2 Classification. The undershirts shall be of one type in the following classes and sizes (see 6.2):

Class 1 - Natural (Unbleached)
Class 2 - Olive Green 109
Class 3 - Brown 436

Schedule of sizes

X - Small	Medium	X - Large
Small	Large	XX - Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1491	-	Glossary of Knitting Imperfections

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 2130 - Diameter of Wool and Other Animal Fibers by Microprojection

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.1.2 Standard sample. The finished class 2 and class 3 undershirts shall match the standard sample for shade and finish appearance and shall be equal to or better than the standard sample, with respect to all characteristics for which the standard sample is referenced (see 6.3).

3.2 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Material (see 6.5).

3.3.1 Basic cloth. The basic cloth for the undershirts shall be knit with a cotton/wool merino mix yarn made from carded cotton and staple fleece or pulled sheep's wool. The wool shall be not lower than 62's U.S. Standard when

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

determined as specified in 4.4.1.1. The cloth shall conform to the following requirements when tested as specified in 4.4.1.1 and shall be knit such that the finished undershirts will conform to the requirements in 3.9.

Knit	1 by 1 rib
Wales per inch, minimum	18
Courses per inch, minimum	28
Thickness, minimum	0.035 inch
Bursting strength, minimum	60 pounds
Wool content, minimum	50 percent
Nonfibrous material content, maximum	3.0 percent

3.3.1.1 Shrink resistant treatments. The cotton/wool blend for the finished undershirts (see 3.3.1) shall be treated for resistance to felting shrinkage in stock, top, yarn, or fabric form by a controlled oxidation process approved by the contracting activity. In addition, all of the knitted fabric used in the manufacture of the undershirt shall be preshrunk to reduce the relaxation shrinkage. The shrink resistant treatment shall not be identified by name or trademark on the undershirt or on the package. All material for the drawers shall be treated with a process approved for toxicity (see 6.9).

3.3.1.1.1 Alkali solubility. The alkali solubility of the shrink resistant treated wool for the finished undershirts in the form in which it has been treated (stock, top, yarn, fabric), shall not be increased by more than 6.0 percent over the untreated material (stock, top, yarn, or fabric) when tested as specified in 4.4.1.1.

3.3.1.2 Color. The color of the knitted fabric for the class 1 undershirts shall be natural (unbleached). The color of the knitted fabric for dyed undershirts shall be Olive Green 109 for class 2 and Brown 436 (see 6.6) for class 3. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The dyestuff shall be chosen and applied so that the dyed and finished fabric shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.1. When a standard sample is not available, the dyed and finished fabric shall show no more than a slight trace of labile sulfur as defined in the test method specified in 4.4.1.1.

3.3.1.2.1 Matching. The color of the dyed fabric for the classes 2 and 3 undershirts shall match the standard sample when viewed under filtered tungsten lamps which approximate artificial daylight having a correlated color temperature of 7500 $\pm$ 200 K, with illumination of 100 $\pm$ 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 $\pm$ 200 K.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

3.3.1.2.2 Colorfastness. The dyed fabric for the classes 2 and 3 undershirts shall show fastness to laundering (after 3 cycles), perspiration, and crocking equal to or better than the standard sample; or a fastness rating of at least good to laundering (after 3 cycles) and perspiration and shall show an AATCC Chromatic Transference Scale Rating for crocking not lower than 3.5 when tested as specified in 4.4.1.1.

3.3.1.2.3 Spectral reflectance for Brown 436 (class 3 only). When color Brown 436 is specified, the finished cloth shall meet the spectral reflectance factors (in percent) for the visible/near infrared wavelength range 600 to 860 nanometers (nm) as specified below, when tested as specified in 4.4.1.1.

Wavelength (nanometers)	Reflectance (%) Max.	Min.	Wavelength (nanometers)	Reflectance (%) Max.	Min.
600	20	12	740	62	20
620	20	12	760	65	20
640	20	12	780	68	20
660	26	12	800	71	20
680	35	15	820	74	20
700	46	20	840	77	20
720	56	20	860	80	20

3.3.2 Thread. The cotton thread for seaming and stitching shall be ticket numbers 50 and 70, 3 ply conforming to type IA1 (for class 1 undershirts) or to type IA3 (for classes 2 and 3 undershirts) of V-T-276. The color of the thread for the class 1 undershirts shall be natural (unbleached). The thread for the class 2 undershirts shall be Olive Drab S-1 (C.A. 66022) and the thread for the class 3 undershirts shall be Khaki P-1 (C.A. 66019). The dyed thread shall show fastness to laundering (after 3 cycles) and perspiration equal to or better than the standard sample (see 6.3) or a fastness rating of at least good to laundering (after 3 cycles) and perspiration.

3.3.3 Sewing yarn. The cover and loop threads used with stitch type 606 and the cover thread used with stitch type 607 shall be combed peeler cotton sewing yarn conforming to the requirements specified in table I. The color of the yarn for the class 1 undershirts shall be natural (unbleached). The yarn for the class 2 undershirts shall be dyed Olive Drab S-1, C.A. 66022, and shall show fastness to laundering (after 3 cycles) and perspiration equal to or better than the standard sample. The yarn for the class 3 undershirts shall be Khaki P-1 (C.A. 66019). When no standard sample is available, the dyed yarn shall show good fastness to laundering (after 3 cycles) and perspiration. Testing shall be as specified in 4.4.1.1. As an alternate to the yarn, 70-2 or 70-3 cotton thread conforming to the requirements of 3.3.2 may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements for sewing yarn

Yarn sizes/ply	Yards per lb. (minimum)	Breaking strength (minimum)
30/2 (cover)	11,000	1.65 lbs.
28/1 (looper)	21,000	0.50 lbs.

3.3.4 Gimp. The cotton gimp for reinforcing the buttonholes shall conform to type I, size No. 8 of V-T-280. The gimp for class 1 undershirts shall be unbleached. The gimp for class 2 undershirts shall be Olive Drab S-1, C.A. 66022. The gimp for class 3 undershirts shall be Khaki P-1 (C.A. 66019).

3.3.5 Buttons. The buttons shall be sewing hole, plastic, glossy finish, size 30 line conforming to type II, class D, style 19 of V-B-871. The color of the buttons shall be white, shade BA for the class 1 undershirts, Olive Green BP for the class 2 undershirts, and Taupe BH for the class 3 undershirts.

3.3.6 Jean cloth. The fabric for reinforcing the button and buttonhole panels shall be jean, unbleached, conforming to the requirements of table II when tested as specified in 4.4.1.1.

TABLE II. Requirements for jean cloth

Weight/sq/yd. (minimum)	Yarns/inch (minimum)		Breaking strength in pounds (minimum)	
Ounces	Warp	Filling	Warp	Filling
4.8	96	64	85	48

3.4 Label. Each undershirt shall have a combination identification and size label conforming to type VI, class 4 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.5 Design. The undershirt shall be a long sleeve, two-button, front opening, pullover type as shown on figure 1.

3.6 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the document and the figure, the document shall govern.

3.7 Patterns. Standard patterns will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used only as a guide in cutting the contractor's working patterns. The working patterns shall be identical to the Government patterns. The patterns provide a 3/8 inch seam allowance for LSa-1 seam type and a 1/8 inch seam allowance for FSa-1 seam type.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the currentversion before use.

3.7.1 List of pattern parts. The component parts of the undershirts shall be cut from the material, in the number required, as shown in table III.

TABLE III. Pattern parts

Material	Nomenclature	Cut parts
Cotton/wool knitted fabric	Body	1
	Sleeve	2
	Collarette	1
	Cuff	2
	Buttonhole panel	1
	Button panel	1
	Shoulder gusset	2
Jean cloth	Buttonhole panel reinforcement	1
	Button panel reinforcement	1

3.8 Construction.

3.8.1 Manufacturing operations requirements. The undershirts shall be manufactured in accordance with the operation requirements specified in table IV. The contractor is not required to follow the exact sequence of operations.

3.8.1.1 Stitches, seams and stitchings. Stitches, seams, and stitching types specified in table IV shall conform to FED-STD-751. Whenever two or more methods, seams or stitches are given for the same part of an operation, any one of them may be used. Ends of all stitching (except ends of type 401 stitching) when not caught in other seams or stitching shall be backstitched not less than 1/2 inch. Thread tension shall be maintained so there will be no loose stitching resulting in a loose bottom or top thread or no excessively tight stitching resulting in puckering of the materials sewn. The minimum and maximum number of stitches per inch shall be as specified in table IV.

3.8.1.2 Type 401 stitching. Where stitch type 401 is used, the looper thread shall be on the inside of the undershirts. Both ends of all seams and stitching produced with 401 stitch type when not caught in other seams or stitching shall have a 1/2 to 3/4 inch chain extending beyond each end. Thread tension shall be maintained so there will be no loose stitching.

3.8.1.3 Repairs of stitching. Repairs of stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the current version before use.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.8.1.4 Replacement of defective components. During the manufacturing process components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with non-defective and properly matched components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

NO.	TABLE IV. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. The undershirts shall be cut in accordance with the patterns. The body shall be circular without side seams except as noted below. The front opening panels and cuffs shall be cut in the direction of the wales as indicated by the directional lines on the pattern and shall be made of double thickness of the knitted fabric. The front opening panels may be strip cut to conform to pattern requirements.						
	NOTE: When the widths specified for the X-large and the XX-large cannot be produced on a single machine, the fabric may be taken from two smaller machines and seamed together to produce the specified widths.	606 or 607	FSa-1 FSa-1	12-16 12-16	70-3 70-3	28/1 1/ 70-3	30/2 1/ 30/2
2.	Reinforcement. Jean for reinforcing the button and buttonhole panels shall be cut in the warp direction and shall extend the full width and length of the panels. The jean reinforcement cloth may be strip cut to conform to pattern requirements.						
3.	Attach cuffs. Seam folded cuffs to sleeves. The wales of the finished cuffs shall run in the same direction as the wales of the sleeve fabric.	605	LSa-1	12-16	50-3	50-3	60-3

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the current version before use.

NO.	TABLE IV. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Attach shoulder gussets.						
	Seam one edge of shoulder gusset to back of garment.	606	FSa-1	12-16	70-3	28/1 1/	30/2 1/
		or 607	FSa-1	12-16	70-3	70-3	30/2
5.	Attach sleeves to body.						
	Seam sleeves to body and width of shoulder gusset.	606	FSa-1	12-16	70-3	28/1 1/	30/2 1/
		or 607	FSa-1	12-16	70-3	70-3	30/2
6.	Seam sleeves.						
	Seam from bottom edge of cuff up the sleeve and across shoulder gusset, joining gusset and garment front.	606	FSa-1	12-16	70-3	28/1 1/	30/2 1/
		or 607	FSa-1	12-16	70-3	70-3	30/2
7.	Make buttonhole panel.						
	Fold back buttonhole panel inserting jean reinforcement, and overedge bottom of panel catching jean in overedge.	504	SSa-1	12-16	50-3	50-3	50-3
		or 505	SSa-1	12-16	50-3	50-3	50-3
8.	Attach front opening panels.						
	Fold back button panel, inserting jean reinforcement and seam button and buttonhole panels to body, catching jean reinforcement strips in seaming and continuing seam on buttonhole panel 1/2 ± 1/4 inch below bottom edge.	606	FSa-1	12-16	70-3	28/1 1/	30/2 1/
		or 607	FSa-1	12-16	70-3	70-3	30/2 1/

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE IV. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Finish bottom of panels.						
	Turn under body fabric and insert bottom of button panel between body fabric and buttonhole panel. Stitch across body fabric through bottom of opening and buttonhole panel forming a box.	301	LSd-1	12-16	50-3	50-3	-
		or 401	LSd-1	12-16	50-3	50-3	-
10.	Attach collarette.						
	Seam collarette to body and shoulder gussets.	605	BSa-1	12-16	50-3	50-3	50-3
		or 606	LSa-1	12-16	70-3	28/1 1/	30/2 1/
		or 607	BSa-1	12-16	70-3	70-3	30/2 1/
11.	Make buttonholes.						
	Make two horizontal, 3/4 to 7/8 inch eyelet end taper bar buttonholes worked over gimp in left panel. Front edges of buttonholes shall be 3/8 ± 1/8 inch from folded edge. Center of top buttonhole shall be 3/4 ± 1/4 inch below collarette seam and bottom buttonhole shall be 4 ± 1/2 inches below the top buttonhole.	Buttonhole	-	48-56 per buttonhole	50-3	50-3	-
12.	Attach buttons.						
	Two buttons shall be securely machine stitched to the right front panel through the reinforcement strip. The buttons shall be spaced to coincide with the buttonholes and shall be 1/2 ± 1/8 inch from folded edge.	101	-	20-24 per button	60-3	-	-
		or 301	-	14-16 per button	50-3	50-3	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE IV. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make undershirt hem.						
	Turn up bottom of undershirt and seam, making 1 ± 1/4 inch hem. Stitches may be visible on the outside of the undershirt.	503	EFc-1	12-16	50-3	50-3	-
		or 505	EFc-1	12-16	50-3	50-3	50-3
14.	Tack cuffs.						
	The stitching chain at bottom of cuff shall be turned under 1/2 ± 1/16 inch and tacked, or bartacked parallel to seam beginning 1/8 ± 1/16 inch from bottom edge of cuff with stitching extending 1/2 ± 1/8 inch to secure and cover the turnback of stitching chain.	304	-	12-16 per tack	50-3	50-3	-
		or bartack 1/2 inch	-	28 per bartack	50-3	50-3	-
15.	Finish ends of collarette.						
	When collarette is made, the stitching chain shall be turned under 1/2 ± 1/16 inch at both ends and tacked beginning 1/8 inch from front edge of undershirt with stitching extending 1/2 ± 1/8 inch to secure and cover the turn-back of stitching chain.	304	-	12-16 per tack	50-3	50-3	-
		or bartack 1/2 inch	-	28 per bartack	50-3	50-3	-
16.	Attach label.						
	Stitch in label (vertical direction only) to the center back just below the collarette on inside of undershirt. Attach label slack so that the label can expand with the undershirt fabric.	301	-	12-16	50-3	50-3	-

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026
Check the source to verify that this is the current version before use.

NO.	TABLE IV. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Clean undershirt. Trim raw edges, ends of thread and stitching, inside and outside the undershirt. Remove all spots and stains. 1/ 70-2 or 70-3 cotton thread may be used as an alternate (see 3.2.3). NOTE: Sewing thread sizes are given with the ticket No. and ply separated by a dash as 50-2. Yarn sizes are followed by a slash mark and the ply, as 30/2.						

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the current version before use.

3.9 Physical requirements.

3.9.1 Measurements and weights. The measurements and weights of the finished undershirts shall conform to the requirements of table V. All measurements shall be made with the undershirt laid out flat under no tension.

TABLE V. Finished measurements (inches) and weights

	Fig. 1	XS	S	M	L	XL	XXL	Tolerance (inches)
Overall body length	B	28	29	30	31	32	33	- 1/2 + 1
Body width	A&K	14	16	18	20	22	24	- 1/2 + 1
Overarm sleeve length 1/	E	21-1/2	22	22-1/2	23	23-1/2	24	- 1/2 + 1
Underarm sleeve length 1/	D	18-1/2	19	19-1/2	20	20-1/2	21	- 1/2 + 1
Armhole length	F	8-1/4	8-7/8	9-1/2	10-1/8	10-3/4	11-3/4	- 1/2 + 1
Shoulder width	H	4-1/4	5	5-3/4	6-1/2	7-1/4	8	± 1/2
Front opening length	J	7-3/4	7-3/4	7-3/4	7-3/4	7-3/4	7-3/4	± 1/2
Cuff width	M	3	3	3-1/2	3-1/2	4-1/2	4-1/2	± 1/2
Cuff length	L	4	4	4	4	4	4	± 1/2
Collarette width		1	1	1	1	1	1	- 1/4 + 1/2
Hem width		1	1	1	1	1	1	± 1/4
Buttonhole panel width		1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	- 1/4 + 1/2
Button panel width		1	1	1	1	1	1	- 1/4 + 1/2
Weight per dozen (lbs) conditioned		6-1/2	7	8-1/4	9-1/4	10-1/2	11-1/4	Minimum

1/ Paired component measurements shall not be uneven by more than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the current version before use.

3.9.2 Shrinkage requirements. The finished undershirt shall not shrink or elongate at the specified locations more than the maximum amounts shown in table VI when tested as specified in 4.4.4.2.

TABLE VI. Relaxation and felting requirements

	Overall body length (percent)	Body width (percent)	Overarm sleeve length (percent)
Relaxation:			
Shrinkage (maximum)	8.0	8.0	8.0
Elongation (maximum)	8.0	8.0	8.0
Felting:			
Shrinkage (maximum)	8.0	8.0	8.0
Elongation (maximum)	8.0	8.0	8.0
Total (relaxation plus felting):			
Shrinkage (maximum)	13.0	13.0	13.0
Elongation (maximum)	13.0	13.0	13.0

NOTE: In summing the relaxation and felting shrinkage, if one is shrinkage (a positive number) and the other is elongation (a negative number), the two numbers shall be added algebraically.

3.10 Workmanship. The finished undershirts shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein as classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3 and tested for characteristics specified in 4.4.4. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Component testing. In addition to the quality assurance provisions of the referenced documents, components and materials listed in table VIII shall be tested for the characteristics shown therein. The methods of testing specified in FED-STD-191 wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table VII. The lot shall be unacceptable if one or more sample units fail to meet any requirement specified. The lot size units and the sample units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the currentversion before use.

Material	Lot size unit	Sample unit
Wool:		
Fabric	Yard	1 yard full width 1/
Jean cloth	Yard	1/2 yard full width
Sewing yarn	Spool, cone, or tube	1 spool, cone, or tube
Basic cloth	Yard	3 yards full width

1/ An equal quantity of untreated material is required for the alkali solubility test.

TABLE VII. Sample size

Lot size	Sample size (No. of sample units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE VIII. Component tests

Characteristic	Requirement reference	Test method
Basic cloth:		
Yarn identification	3.3.1	1/
Type of knit	3.3.1	Visual 1/
Wales and courses	3.3.1	5020
Thickness	3.3.1	5030
Bursting strength	3.3.1	5120
Wool content	3.3.1	2101 2/
Nonfibrous material	3.3.1	2611
Wool grade	3.3.1	ASTM D 2130 3/
Labile sulfur (classes 2 and 3)	3.3.1.2	2020
Colorfastness (classes 2 and 3):		
Laundering	3.3.1.2.2	5614
Perspiration	3.3.1.2.2	5680
Crocking	3.3.1.2.2	5651
Spectral reflectance (class 3)	3.3.1.2.3	4.5.1
Alkali-solubility of wool	3.3.1.1.1	2800 4/

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:02Z
Check the source to verify that this is the currentversion before use.

TABLE VIII. Component tests (cont'd)

Characteristic	Requirement reference	Test method
Sewing yarn:		
Combed peeler cotton	3.3.3	1/
Ply	Table I	1/
Yarn size	Table I	4021
Yards per pound	Table I	4010
Breaking strength	Table I	4100
Colorfastness (dyed yarn) to:		
Laundering (after 3 cycles)	3.3.3	5610
Perspiration	3.3.3	5680
Jean cloth:		
Weight (oz./sq.yd.)	Table II	5041
Yarns per inch	Table II	5050
Breaking strength	Table II	5100

1/ Unless otherwise specified a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ Wool content shall be calculated on the basis of the dry desized specimen.

3/ The dyed cloth shall be stripped prior to wool grade determination, in accordance with the stripping procedure described in 4.4.1.2. One sample unit shall be taken from each lot.

4/ The wool shall be tested for alkali-solubility in the form in which it was treated and the sample unit shall consist of both treated and untreated material.

4.4.1.2 Wool stripping procedure.

4.4.1.2.1 Test specimens. Each specimen shall be 3.0 inches long in the filling direction and weigh 5.0 grams and the warp direction shall be marked. There shall be two specimens to each sample unit. Specimens shall be taken from areas at least 2 inches from a selvage (when known) and shall not contain the same warp or filling yarns.

4.4.1.2.2 Apparatus. The equipment to be used shall be the launderometer and canisters described in Method 5614 of FED-STD-191.

4.4.1.2.3 Reagents. The reagents used shall be zinc (see 6.10) or sodium sulfoxylated formaldehyde and acetic acid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

4.4.1.2.4 Procedure. Place 1 gram of the reagent in a canister, add 400 mL distilled water and adjust the pH to 3.5 to 4.0 with acetic acid. Add 5.0 gram specimen of the fabric to the canister. Place the canister in the launderometer and rotate until the temperature reaches 208 ± 3°F. After this temperature has been reached, continue rotation for an additional 30 minutes. Then remove the fabric and rinse it with warm water (120°F) for 5 minutes and then cold water for 5 minutes. Air dry on a flat surface under ambient conditions. Then test the sample for wool grade in accordance with ASTM D 2130.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IX. The lot size shall be expressed in units of one undershirt. The sample unit shall be one undershirt. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE IX. End item visual defects

Examine	Defect	Classification Major	Minor
Material defects 1/	Any hole, cut, tear, dropped stitches or run, thin place, or mend	X	
	Any slub (more than twice the size of the normal diameter of the yarn)		X
	Drop ply		X
	Barre, loose knitting, causing sleasiness in fabric		X
	Burrs	X	
	Uneven, ridgy, or cockled fabric		X
	Birdseye or miss-knit		X
Color and shade (classes 2 and 3 undershirts)	Wrong color	X	
	Color or shade not comparable to standard or approved sample		X
	Shaded parts clearly visible		X
	Streaks clearly visible		X
Cleanness	Any spot or stain		X
	Rancid, bad odor	X	
Seams and stitching	Any seam twisted, puckered, or pulled		X
	Needle chew	X	
	Loose or tight tension resulting in an unsatisfactory seam	X	

1/ For knitted fabric imperfection definitions, see MIL-STD-1491. (A pick glass may be used to determine whether a suspected condition is scoreable.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE IX. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Seam and stitching (cont'd)	End of stitching, except 401 stitching, when not caught in other seam or stitching, not backstitched or backstitched less than 1/2 inch		X
	End of 401 stitching, when not caught in other seam or stitching: -chain not extending beyond end	X	
	-chain extending beyond end, but extending less than 1/2 inch beyond end		X
	Any part of undershirt badly pleated, caught or twisted in any unrelated row of stitching	X	
	Two or more untrimmed ends more than 1 inch in length		X
	Repair of open seam not as specified		X
Seam type	Wrong seam type	X	
Stitch type	Wrong stitch type	X	
Stitches per inch	Number of stitches per inch exceeding minimum or maximum specified		X
Open seam (any broken stitch, two or more continuous skipped or runoff stitches, or two or more threads of a stitch broken or skipped	Up to 1/4 inch		X
	1/4 inch or more	X	
	Any open seam on hems 1/2 inch or more		X
Raw edge	Any up to 1/2 inch		X
	Any 1/2 inch or more in length	X	
	NOTE: Any protrusion more than 1/8 inch long from the stitching line shall be defined as a raw edge.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

TABLE IX. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Undershirt construction	Any operation omitted or other than specified	X	
Components	Any component part missing, improperly inserted, or other than specified	X	
Buttons	One or more missing, added, or broken	X	
	Incorrect size, type, or color		X
	Loose		X
Buttonholes	One or more missing, added, or incorrect size	X	
	Wrong type, incorrectly set, uncut, ragged edge, tacking omitted or misplaced at either end, improperly positioned, or incomplete stitching		X
	One or more broken stitches		X
Buttons and buttonholes	Incorrectly aligned causing a noticeable bulge when buttoned		X
Hems	Omitted	X	
Tacking	Tack omitted on collarette or cuff	X	
	Tack misplaced on collarette		X
Label or markings	Missing, misplaced, incorrect, illegible, or not properly stitched		X
	Preshrinking process identified by name or trademark on undershirts	X	

4.4.3 End item dimensional examination. The end items shall be examined for conformance to dimensions specified in table V. Any dimension deviating from the specified requirement and tolerance, and pair components uneven in length by 1/2 inch or more shall be classified as defects. The lot size shall be expressed in units of one undershirt. The sample unit shall be one undershirt. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

4.4.4 End item testing.

4.4.4.1 Weight testing. The end items shall be tested for conformance to the weight per dozen requirements in 3.9.1. The sample unit shall consist of twelve undershirts of one size only. The sample shall consist of one sample unit from each size in the lot. The sample undershirts shall be allowed to reach equilibrium under standard condition as defined in FED-STD-191. Upon reaching equilibrium, each sample unit shall be weighed to the nearest 0.1 ounce under standard conditions. Failure of any sample unit to conform to the applicable weight per dozen requirement shall be cause for rejection of the lot.

4.4.4.2 Shrinkage testing. The end items shall be tested for relaxation shrinkage and felting shrinkage. The lot size shall be expressed in units of undershirts. The sample unit shall be two undershirts. The sample size shall be as indicated in table VII. The lot shall be rejected if any sample unit fails to meet the shrinkage requirements specified in 3.9.2. Relaxation and felting shrinkage shall be determined in accordance with Methods 7558 and 7554 of FED-STD-191 except that:

a. After reaching equilibrium under standard conditions, the test undershirts shall be laid out flat without tension, front up, and measured at the following places:

1. Overall body length (B, figure 1) - From point of intersection of collar and front shoulder seam to bottom edge of garment.
2. Body width (A, figure 1) - Across width of body, 5 inches under armhole seam.
3. Overarm sleeve length (E, figure 1) - From point of intersection of shoulder gusset seam and armhole seam to bottom edge of cuff. Measurements shall be taken to the nearest 0.1 of an inch and shrinkage or elongation shall be reported to the nearest 0.1 of a percent. Elongation shall be reported prefixed with a minus (-) sign.

b. The load for both relaxation and felting tests shall consist of two test undershirts combined with a sufficient amount of ballast (of same approximate fabric weight and size as the undershirts) to make a 6-pound dry load. The same two undershirts shall be used for determining first relaxation and then felting shrinkage.

c. In the felting procedure, the period of laundering shall be 2 hours.

d. In both the relaxation and felting procedures, the test undershirts plus ballast shall be dried by placing in a tumble drier set at an initial stack temperature of 130° ± 2°F and then tumble dried for 30 to 45 minutes during which time the stack temperature shall not drop below 120°F nor rise above 132°F.

e. Pressing shall be omitted.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:02Z
Check the source to verify that this is the current version before use.

f. Shrinkage shall be computed according to the following formula:

$$\text{Relaxation shrinkage, percent} = \frac{O-R}{O} \times 100$$

$$\text{Felting shrinkage, percent} = \frac{R-F}{O} \times 100$$

Where O = original measurement
R = measurement after relaxation
F = measurement after felting test

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Markings (exterior and unit packs)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of component such as incomplete closure of container flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of unit packs per container is more or less than required.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

Examine	Defect
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Methods of inspection.

4.5.1 Spectral reflectance measurements in the visible/near infrared. Spectral reflectance data shall be obtained from 600 to 860 nanometers (nm), at 20 nm intervals on a spectrophotometer (see 6.7) relative to a barium sulfate standard, the preferred white reference standard. Other white reference materials may be used, provided they are calibrated to absolute white; e.g., Halon, magnesium oxide, or vitrolite tiles (see 6.8). The spectral bandwidth shall be less than 26 nm at 860 nm. Reflectance measurements may be made by either the monochromatic or polychromatic mode of operation. When the polychromatic mode is used, the spectrophotometer shall operate with the specimen diffusely illuminated with the full emission of a source that simulates either CIE Source A or CIE Source D65. The specimen shall be measured as single layer, backed with three layers of the same fabric and shade. Measurements shall be taken on a minimum of two different areas and the data averaged. The specimen shall be viewed at an angle no greater than 10° from normal with the specular component included. Photometric accuracy of the spectrophotometer shall be within 1 percent and wavelength accuracy within 2 nm. The standard aperture size used in the color measurement device shall be 1.0 to 1.25 inches in diameter. When the measured reflectance values at four or more wavelengths do not meet the limits specified in 3.3.1.2.3, it shall be a test failure.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each undershirt shall be folded in accordance with commercial practice, to measure approximately 14-1/2 inches in length by 11-1/2 inches in width and the unit packed in a close-fitting polyethylene bag conforming to A-A-50083.

5.1.2 Commercial. Undershirts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Forty undershirts of one class and size only, preserved as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat 2 in length, 1 in width, and 20 in depth within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the class may be packed within the same shipping container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Forty undershirts of one class, and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat 2 in length, 1 in width, and 20 in depth within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the class may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Undershirts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), undershirts, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
CLASS
SIZE
QUANTITY

5.4.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The undershirts are intended for cold weather use by personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Class and size required (see 1.2).
c. When a first article is required (see 3.2, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.3).

6.6 Dye combinations. A suggested but not mandatory dye combination for Brown 436 is as follows:

Reactive Violet 5
Reactive Red 49
Remazol Golden Yellow 3R
Remazol Navy Blue R

6.7 Spectrophotometers. Suitable spectrophotometers for measuring spectral reflectance in the visible/near infrared are the Diano Hardy, Diano Match Scan, Hunter D54P-IR, and MacBeth 1500 with IR option.

6.8 White standard. Barium sulfate of suitable quality for use as a white reference standard is available from the Eastman Kodak Company. The same source has available magnesium reagent (ribbon) and Halon. Suitable tiles can be obtained from the National Bureau of Standards or the instrument manufacturers.

6.9 Approval of components. Approval of such components and combinations are the responsibility of the U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, and is based on more extensive tests, including those for toxicity, which are not set forth in this document. Because of the time necessary to conduct full evaluation, only those chemical treatments already approved and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement (see 3.3.1.1).

6.10 Parolite may be purchased from Diamond Shamrock Chemical, Process Chemical Division, 350 Mt. Kemble Avenue, Morristown, NJ 07960-1931.

6.11 Subject term (key word) listing.

Cold weather clothing
Undershirt

6.12 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Navy - MC
Air Force - 11, 82
DLA - CT

User activity:


Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0615

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

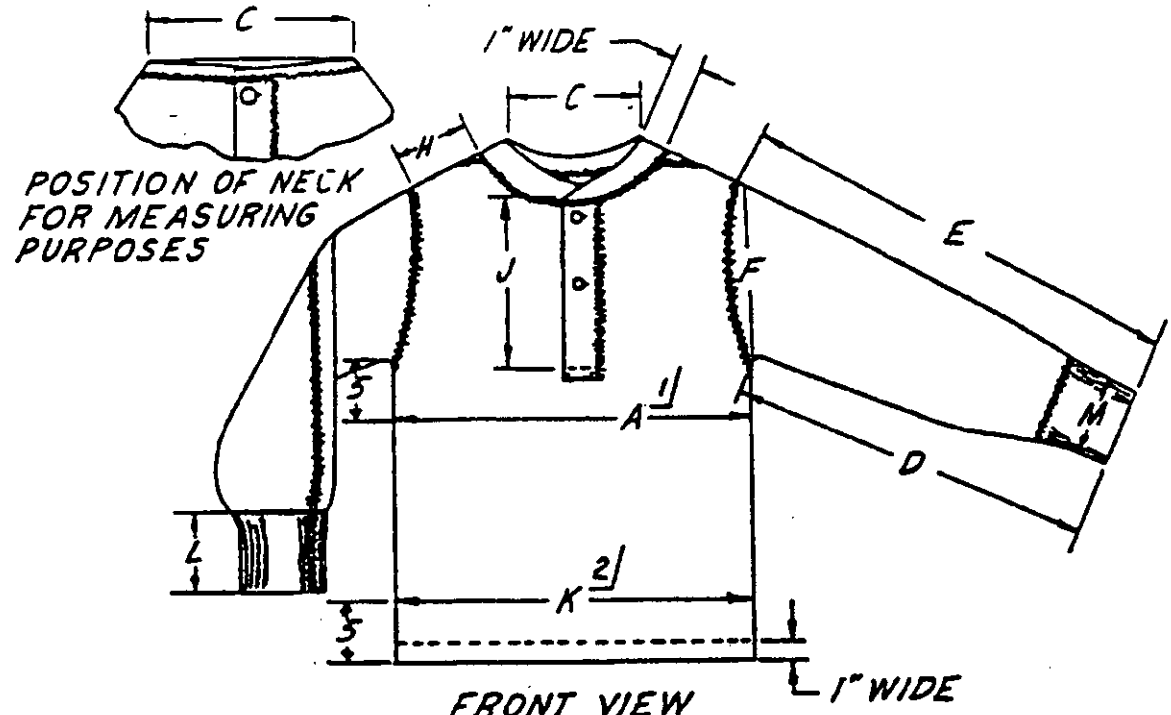

1/ MEASUREMENT FOR BODY WIDTH "A" SHALL BE TAKEN 5" BELOW THE ARM SEAM
2/ MEASUREMENT FOR BODY WIDTH "K" SHALL BE TAKEN 5" ABOVE BOTTOM OF UNDERSHIRT

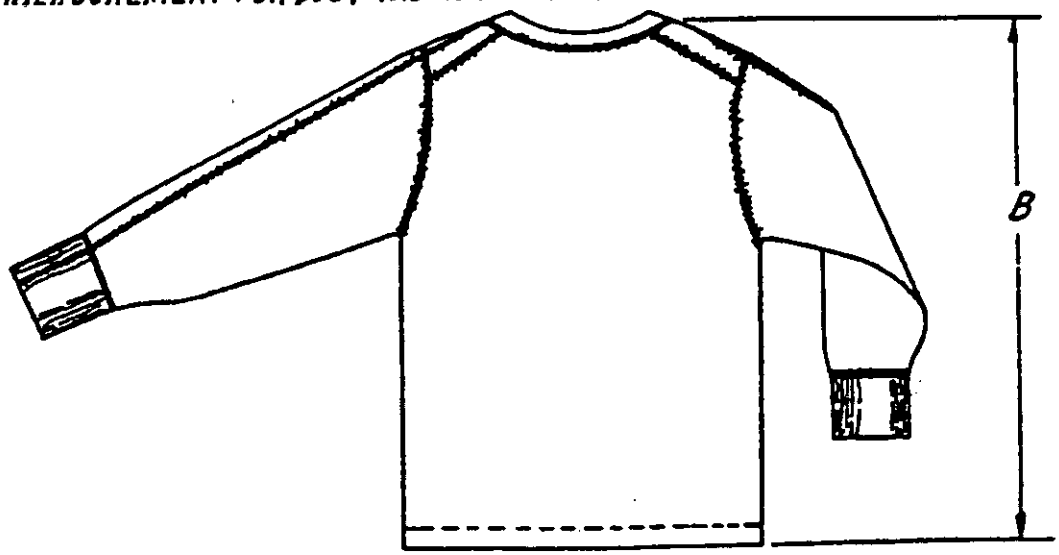


FIG. 1 UNDERSHIRT, COLD WEATHER, MEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-U-43262D	UNDERSHIRTS, COLD WEATHER, MEN'S

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil -- Downloaded: 2026-02-21 21:24:022
Check the source to verify that this is the current version before use.