
FED. SUP CLASS
5990

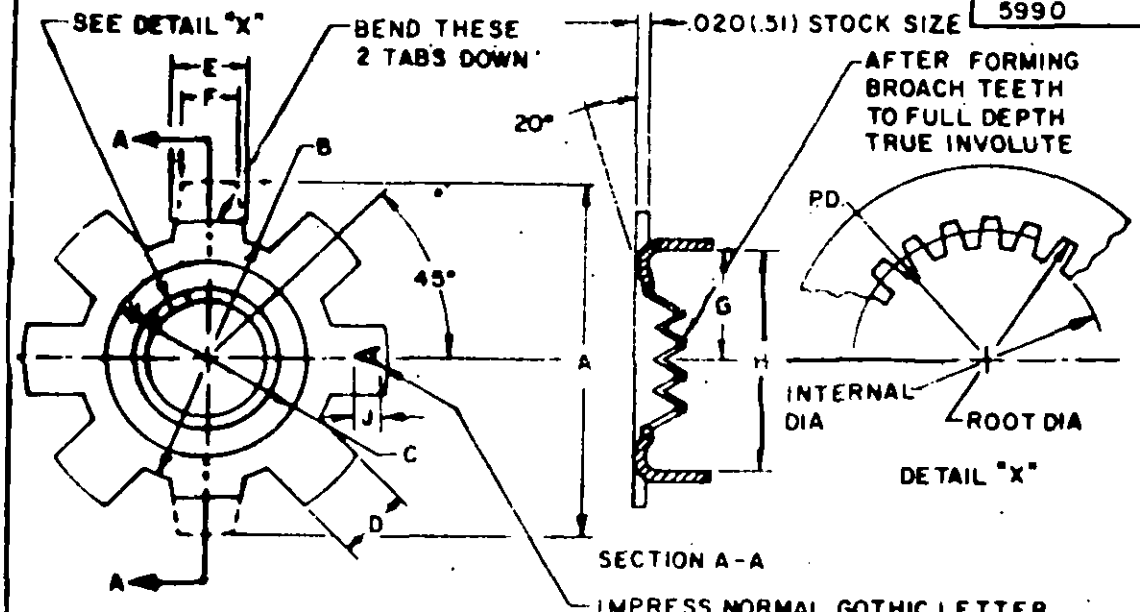

Part no.	A	B	C MIN	D MIN	E	F	G	H	J MIN	GEAR DATA					
										Press angle	No. teeth	D.P.	P.D. +.001 (.03)	Root +.005 (.13)	Internal +.005 (.13)
MS17186-1	.432 (10.97)	.287 (7.29)	.215 (5.46)	.09 (2.29)	.093 (2.36)	.078 (1.98)	.146 (3.71)	.292 (7.42)	.05 (1.27)	20°	13	120	.108 (2.74)	.125 (3.18)	.091 (2.31)
MS17186-2	.516 (13.11)	.350 (8.89)	.291 (7.39)	.09 (2.29)	.125 (3.18)	.093 (2.36)	.177 (4.50)	.355 (9.02)	.05 (1.27)	20°	21	120	.175 (4.45)	.192 (4.88)	.158 (4.01)
MS17186-3	.516 (13.11)	.350 (8.89)	.291 (7.39)	.09 (2.29)	.125 (3.18)	.093 (2.36)	.177 (4.50)	.355 (9.02)	.05 (1.27)	20°	15	96	.156 (3.96)	.177 (4.50)	.135 (3.43)
MS17186-4	.625 (15.88)	.437 (11.10)	.350 (8.89)	.12 (3.05)	.125 (3.18)	.093 (2.36)	.208 (5.28)	.417 (10.59)	.06 (1.52)	20°	22	96	.229 (5.82)	.250 (6.35)	.208 (5.28)
MS17186-5	.432 (10.97)	.287 (7.29)	.215 (5.46)	.09 (2.29)	.093 (2.36)	.078 (1.98)	.146 (3.71)	.292 (7.42)	.05 (1.27)	20°	13	120	.108 (2.74)	.125 (3.18)	.091 (2.31)
MS17186-6	.516 (13.11)	.350 (8.89)	.291 (7.39)	.09 (2.29)	.125 (3.18)	.093 (2.36)	.177 (4.50)	.355 (9.02)	.05 (1.27)	20°	21	120	.175 (4.45)	.192 (4.88)	.158 (4.01)
MS17186-7	.516 (13.11)	.350 (8.89)	.291 (7.39)	.09 (2.29)	.125 (3.18)	.093 (2.36)	.177 (4.50)	.355 (9.02)	.05 (1.27)	20°	15	96	.156 (3.96)	.177 (4.50)	.135 (3.43)
MS17186-8	.625 (15.88)	.437 (11.10)	.350 (8.89)	.12 (3.05)	.125 (3.18)	.093 (2.36)	.208 (5.28)	.417 (10.59)	.06 (1.52)	20°	22	96	.229 (5.82)	.250 (6.35)	.208 (5.28)

MATERIAL: Nos. 1, 2, 3, & 4 Aluminum alloy, Federal Specification QQ-A-318 Temper H34
Nos. 5, 6, 7, & 8 Commercial brass, Specification QQ-B-613B or QQ-B-626B
PROTECTIVE TREATMENT: Nos. 1, 2, 3, & 4 Dichromate, Specification MIL-C-5541
Nos. 5, 6, 7, & 8 Plating, black nickel, Specification MIL-P-18317, .0001 (.00) to .0005 (.01) thick
DIMENSIONS: All dimensions are in inches unless otherwise specified.
TOLERANCES: Unless otherwise specified, Decimals ±.005 (.13), Angles ±1°
NOTES:
1. All tabs to be controlled about the center line.
2. For design feature purposes, this standard takes precedence over documents referenced herein.
3. Referenced documents shall be the issue in effect on date of invitations for bids.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Millimeters are in parentheses.

APPROVED 20 SEPT 1960 REVISED (A) 9 April 1965

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
Navy
AF

P.A. WP / Other Cust / NSU	INTERNAT INTEREST / NATO	TITLE: WASHER, DRIVE (SYNCHRO)	MILITARY STANDARD MS17186
Procurement Specification NONE		SUPERSEDES: MS17186 (WP) (A)	SHEET 1 OF 2

DD FORM 1 OCT 63 672 (LOCALLY REPRODUCED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 5990-0065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5990

PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT INVOLVED.

APPROVED 20 SEPT 1960 REVISED (A) 9 April 1965

P.A. WP Other Cust MU 11	International Interest NATO	TITLE WASHER, DRIVE (SYNCHRO)	MILITARY STANDARD MS17186
Procurement Specification NONE		SUPERSEDES MS17186 (WP) (A)	SHEET 2 OF 2

DD FORM 10 APR 64 672 (Continued) OBSOLETE

PROJECT 5990-0068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.