
FED SUP CLASS
6695

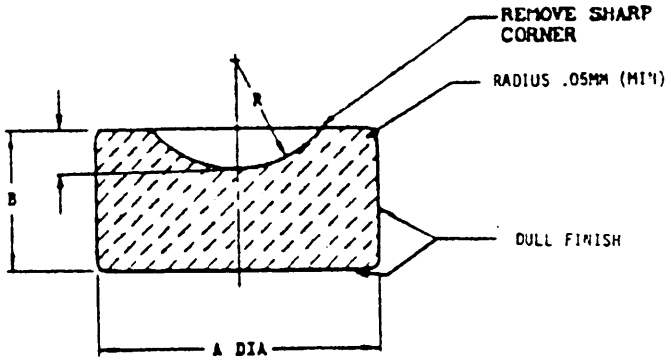

MS PART NO.	FIGH	A DIA		B THK		C DIA		R RAD	
		INCHES	.01MM	INCHES	.01MM	INCHES	.01MM	INCHES	.01MM
			+0 -2		+0 -4		+5 -5		+5 -5
MS24595-1		.0985	250	.0630	160	.0709	35	.0512	130
MS24595-2		.1260	320	.0630	160	.0453	25	.0315	80
MS24595-3		.1575	400	.0630	160	.1182	55	.0906	230

MATERIAL: SYNTHETIC WHITE SAPPHIRE

FINISH: ALL SURFACES TO BE POLISHED EXCEPT WHERE OTHERWISE INDICATED
BEARING SURFACE TO BE FREE OF CHIPS AND SCRATCHES VISIBLE WITH AN 18X EYE GLASS.

NOTES: OUTSIDE DIAMETER AND CUP TO BE CONCENTRIC WITHIN .005 MM (.0002 in.) TOTAL INDICATOR READING.

THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER.
EXAMPLE: MS 24595-1.

THESE STANDARD ITEMS ARE MANDATORY FOR USE IN DESIGN, ENGINEERING AND PROCUREMENT FOR ALL SIZES OF JEWEL BEARINGS REQUIRED BETWEEN THE MAXIMUM AND MINIMUM SIZES SHOWN ON THE STANDARD.

INCH DIMENSIONS ARE FOR INFORMATION ONLY.

INACTIVE FOR NEW DESIGN AFTER 1 SEPTEMBER 1969

APPROVED 25 AUG 1959 REVISED (B) 11 Sept 1969 (B) 8 April 1960

CUSTODIANS	OTHER INT.
ORD	A-
SHIPS	B-
USAF	AS.

PREPARING ACTIVITY: SHIPS

MILITARY STANDARD

BEARING, JEWEL, CUP
(INDUSTRIAL TYPE)

MS24595

FSC 6695

SUPERSEDING

SHEET 1 OF 1

DD FORM 1 OCT 61 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.