
REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS ISSUE OF THE JISS SPECIFIED IN THE SOLICITATION. MIL-S-83731

THIS SPECIFIC ... IS APPROVED FOR USE BY ... all Departments and Agencies ... of the Department of Defense

Form Approved
OMB No 0704-0188

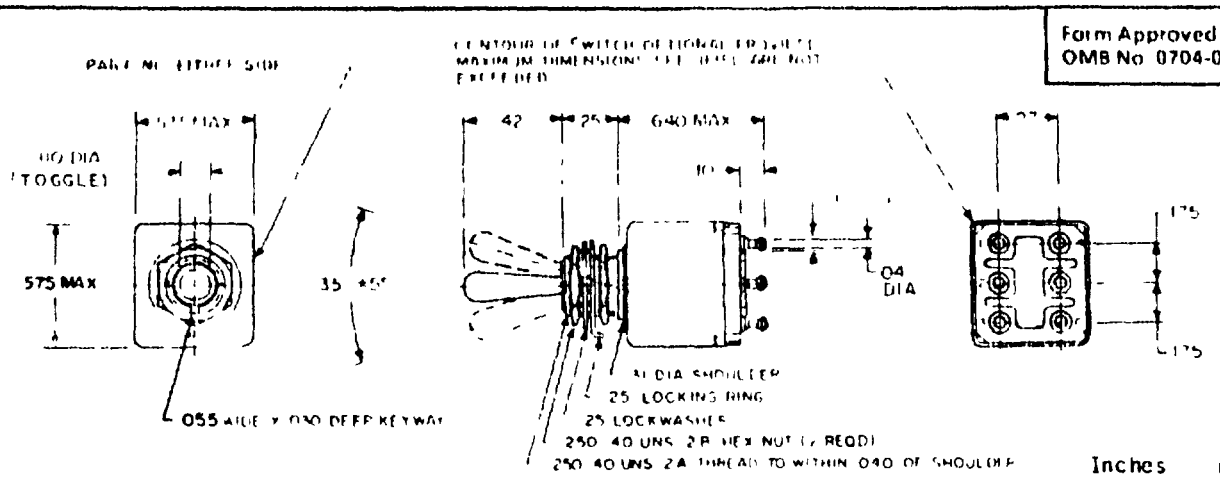

Inches	mm
.030	0.76
.04	1.02
.055	1.40
.07	1.78
.10	2.54
.175	4.45
.25	6.35
.27	6.86
.31	7.87
.42	10.67
.535	13.59
.575	14.61
.640	16.26

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± .020 (0.51 mm) for two place decimals and ± .005 (0.13 mm) for three place decimals
4. For hardware detail specifications, see appendix of MIL-S-8373.
5. Configuration of switch case is optional provided maximum dimensions specified are not exceeded

CANCELED MS PART NUMBER 1/	SUBSTITUTE MS PART NUMBER 1/	CIRCUITS MADE WITH TOGGLE LEVER IN KEYING SIDE 1-2 4-5	CENTER POSITION			OPPOSITE KEYING SIDE 2-3 5-6
MS27790-1	MS27790-34	ON	2-3	ON	4-5	ON
-2	-35	MOM-ON	2-3	ON	4-5	ON
-3	-36	MOM-ON	2-3	ON	4-5	MOM-ON
-4	-38	ON	1-2	ON	5-6	ON
-5	-39	MOM-ON	1-2	ON	5-6	ON
-6	-40	MOM-ON	1-2	ON	5-6	MOM-ON

1/ The canceled part numbers are no longer procurable, the substitute part numbers have a lower dielectric withstanding voltage at reduced barometric pressure (see 2 below)

NOTES
1. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever
2. Test voltage for dielectric withstanding voltage at reduced barometric pressure, shall be 400 V rms minimum.
3. Electrical endurance shall be performed for 30,000 cycles.
4. Mechanical endurance shall be performed 50,000 cycles at -65°C and then 50,000 cycles at 85°C.
5. Intermediate current shall be performed for 30,000 cycles.
6. Terminals shall be molded into the switch case and shall accommodate no 16 awg wire
7. Strength of actuating lever pivot and lever stop 8 lbs.
8. Sand and dust. Toggle boots in accordance with MIL-B-5423 shall be used
9. (D) Maximum weight shall be .020 lb.
10. Electrical ratings for 28 volts dc and 115 volts ac at 400 Hz
    Lamp load = 1 ampere, resistive load = 5 amperes, inductive load = 2 amperes.
11. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence
12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

(D) denotes change

PREPARING ACTIVITY CUSTODIANS ARMY AT AIR FORCE REVIEW ACTIVITIES USER PROJECT NUMBER	Air Force-85 NAVY AS DLA	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, MINIATURE, DOUBLE POLE, SEALED	SPECIFICATION SHEET NUMBER MS27790D SUPERSEDING MS27790C AMSC N/A

Source: https://assist.dla.mil - Downloaded: 2026-10-23T16:51
Check the source to verify that this is the current version before use.