

FED. SUP CLASS
6685

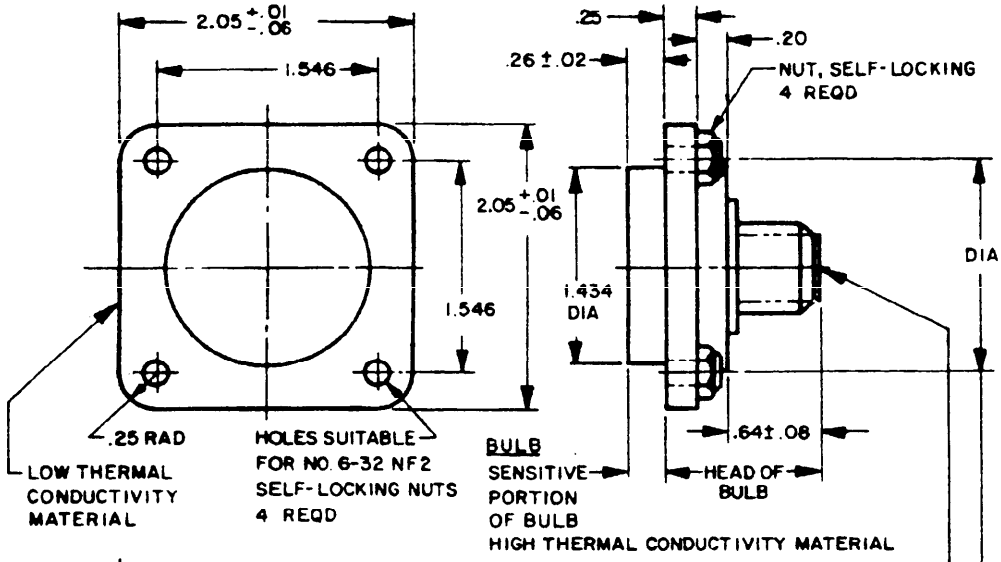

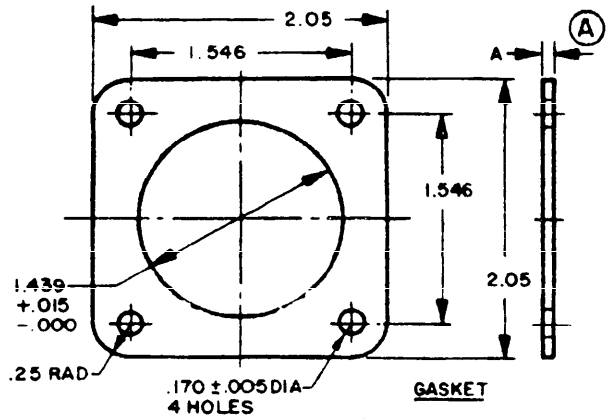

A		
TYPE 1	TYPE 2	TYPE 3
.031 ± .008	.062 ± .015	.094 ± .015

MS PART NO.	ACCURACY
MS28038-1	1.0°C
MS28038-2	0.5°C

EACH BULB SHALL BE FURNISHED WITH THREE GASKETS OF EACH TYPE SHOWN AND MOUNTING SCREWS.

MATERIAL: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ± .01, THREE PLACE DECIMALS ± .005.

APPROVED 17 AUG 53 REVISED (A) 6 Apr 84

User activities:

Review activities:
DLA - GS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82 (A)	TITLE	MILITARY STANDARD
Other Cust NAVY - AS AIR FORCE - 99	TRANSMITTER, TEMPERATURE, ELECTRICAL RESISTANCE.	MS 28038
PROCUREMENT SPECIFICATION MIL-B-8598	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT 6685-0740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.