
FED. SUP CLASS 4730

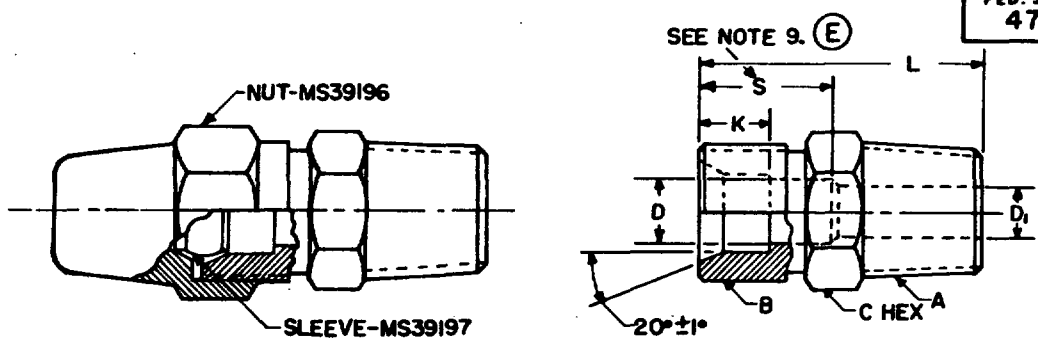

DASH NUMBER ASSY	DASH NUMBER **BODY	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD CLASS 2A	C HEX FLAT NOM	D DIA DRILL	D_1 DIA DRILL	K	(E) L ±.03	(E) S MAX
* 1	21	1/4	1/8	7/16-24UNS	7/16	.188	.188	.25	0.90	---
**41	51	1/4	1/8	7/16-24UNS	7/16	.188	.188	.25	1.37	---
2	22	1/4	1/4	7/16-24UNS	9/16	.188	.312	.25	1.11	.67
3	23	5/16	1/4	1/2 -24UNS	9/16	.250	.312	.28	1.12	.67
4	24	3/8	1/8	17/32-24UNS	9/16	.312	.188	.31	1.04	.55
**42	52	3/8	1/8	17/32-24UNS	9/16	.312	.188	.31	1.62	.55
* 5	25	3/8	1/4	17/32-24UNS	9/16	.312	.312	.31	1.22	---
6	26	3/8	3/8	17/32-24UNS	11/16	.312	.406	.31	1.25	.68
7	27	3/8	1/2	17/32-24UNS	7/8	.312	.531	.31	1.44	.87
8	28	1/2	1/4	11/16-20UN	11/16	.406	.312	.44	1.34	.65
* 9	29	1/2	3/8	11/16-20UN	11/16	.406	.406	.44	1.34	---
10	30	1/2	1/2	11/16-20UN	7/8	.406	.531	.44	1.53	.87
11	31	1/2	3/4	11/16-20UN	(E) 1-1/16	.406	.656	.44	1.59	.90
12	32	5/8	3/8	13/16-18UNS	(E) 13/16	.531	.406	.44	1.40	.71
* 13	33	5/8	1/2	13/16-18UNS	7/8	.531	.531	.44	1.59	---
14	34	5/8	3/4	13/16-18UNS	(E) 1-1/16	.531	.656	.44	1.65	.90
* 15	35	3/4	1/2	1 - 18UNS	1	.656	.531	.56	1.69	.80
* 16	36	3/4	3/4	1 - 18UNS	(E) 1-1/16	.656	(E) .656	.56	1.72	---
* 17	37	1	1	1-1/4-16UN	1-3/8	.875	.875	.78	2.00	---

REVIEWER: CS
USER: AT, CG, MC, ME, MI

* THESE ITEMS PREFERRED FOR NEW DESIGN.
** THESE ITEMS INACTIVE FOR NEW DESIGN AFTER 30 DEC 1971.

NOTES:
1. MATERIAL: Brass, in accordance with procurement specification.
2. PROTECTIVE COATING: None.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for Spherical Sleeve (Compression) Tube Fittings (SAE J246).
4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   A. For complete assembly (with nut and sleeve), use the MS number, plus the assembly dash number. Example: MS39179-1.
   **B. For the body only use the MS number, plus the body dash number. Example: MS39179-21.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
(E) 9. The through passages must conform to the "D" diameter specified for "S" when larger than "D_1" diameter. At the manufacturer's option the "D_1" diameter when larger than the "D" diameter may be counterbored specified for "S".
10. Interchangeability: After 12 November 1968, MS39179-51 and MS39179-52 superseded MS39180-1 and MS39180-2 respectively. MS39179-51 and MS39179-52 are inactive after 30 December 1971. The superseded MS part numbers should be used until existing stock is depleted.

APPROVED 3 APR 62 REVISED (A) 22 OCT 64 (B) 27 FEB 67 (C) 12 NOV 68 (D) 30 DEC 71 (E) 25 FEB 75

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust	TITLE: ADAPTER, STRAIGHT, PIPE TO TUBE, MALE PIPE END, FOR AIR LINES SPHERICAL SLEEVE	MILITARY STANDARD MS39179
PROCUREMENT SPECIFICATION MIL-P-45911	SUPERSEDES: CFBX1 and in part CFBX1.1 and MS39180	SHEET 1 OF 1

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:47Z
Check this source to verify that this is the current version before use.