

FED SUP CLASS
5305



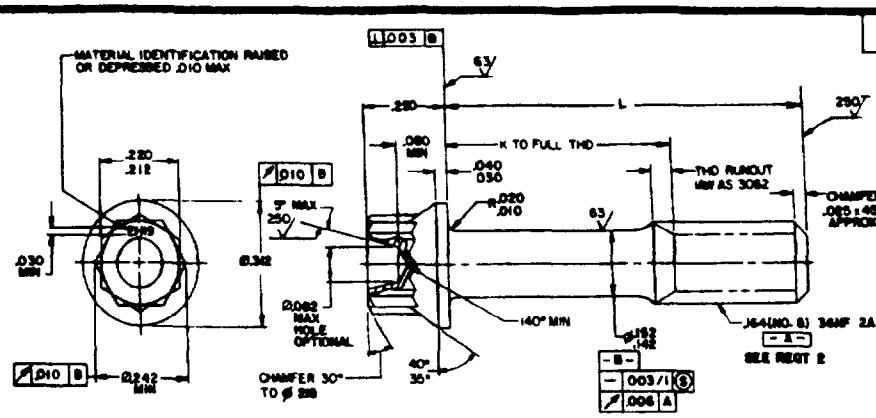

SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LB/100
-03	.312	1/	.46
-04	375	1/	.49
-05	.438	1/	.52
-06	500	1/	.55
-07	.562	1/	.58
-08	.625	1/	.61
-09	688	1/	.64
-10	.750	.125	67
-11	.812	188	.70
-12	.875	.250	.74
-13	938	.312	.77
-14	1 000	.375	.80
-15	1.062	.438	.83
-16	1.125	.500	.86
-17	1.188	.562	.90
-18	1.250	.625	.92
-19	1 312	.688	.95
-20	1.375	750	.98
-21	1.438	.812	1.01
-22	1.500	.875	1.04
-23	1.562	.938	1.08
-24	1.625	1.000	1.11
-25	1.688	1.062	1 14
-26	1.750	1.125	1.17
-27	1.875	1.250	1.23
-28	2.000	1.375	1.29

1/ THREAD TO HEAD. MAXIMUM TWO INPERFECT THREADS.

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5732 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
4. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
5. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD
6. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
7. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010 , ANGULAR DIMENSIONS ±5° .
8. EDGES: BREAK SHARP EDGES .003 - 015 UNLESS OTHERWISE SPECIFIED

INACTIVE FOR NEW DESIGN AFTER 31 DEC 63

Ⓑ ENTIRE STANDARD REVISED

APPROVED 15 AUG 80 REVISED Ⓑ 13 JUL 87

P.A NAVY-AS	INTERNATIONAL INTEREST	TITLE SCREW,MACHINE-CRES,DOUBLE HEXAGON EXTENDED WASHER HEAD,.164-36	MILITARY STANDARD MS9178
Other Cust AIR FORCE-99			
PROCUREMENT SPECIFICATION AMS 7478	SUPERSEDES		PAGE 1 OF 2

DD FORM 1 MAY 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1708

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

9 PART NUMBER THE PART SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9178-03

DASH NUMBER

BASIC MS NUMBER

MS9178-03 INDICATES SCREW, MACHINE-CRES AMS 5735 DOUBLE HEXAGON EXTENDED WASHER HEAD, .164-36, 312 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 15 AUG 60 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA NAVY-AS Other Cust AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-CRES, DOUBLE HEXAGON EXTENDED WASHER HEAD, .164-36	MILITARY STANDARD MS9178
PROCUREMENT SPECIFICATION AMS 7478	SUPERSEDES		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1708

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.