
MS 9219 (ASG)

FED SUP CLASS 5306

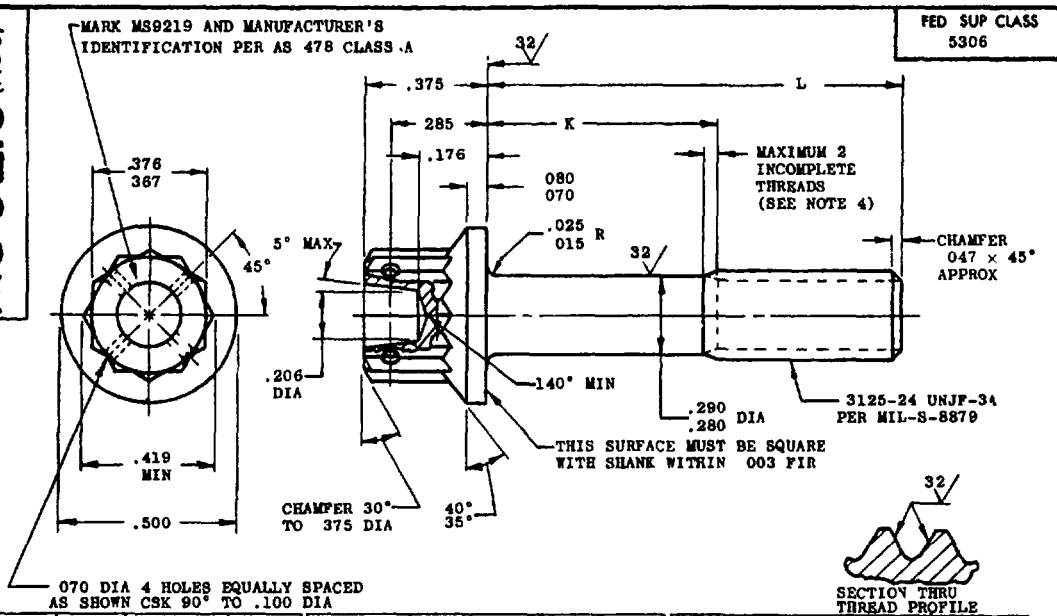

PART NO.	L	K	APPROX WEIGHT LB/100
MS9219-04	500	088- 108	2 06
MS9219-05	562	088-.108	2 17
MS9219-06	.625	.088-.108	2.28
MS9219-07	688	088-.108	2 39
MS9219-08	.750	.088- 108	2.51
MS9219-09	.812	.088-.108	2.62
MS9219-10	875	088- 108	2 73
MS9219-11	938	.088- 108	2 85
MS9219-12	1.000	.125- 145	2.96
MS9219-13	1 062	128-.188	3.07
MS9219-14	1.125	.190-.250	3.19
MS9219-15	1.188	.252-.312	3.30
MS9219-16	1 250	.315-.375	3.41
MS9219-17	1.312	.378-.438	3.52
MS9219-18	1 375	440-.500	3.64
MS9219-19	1.438	502- 562	3 75
MS9219-20	1.500	565- 625	3 87
MS9219-21	1.562	.628-.688	3 98

PART NO.	L	K	APPROX WEIGHT LB/100
MS9219-22	1 625	690- .750	4 10
MS9219-23	1.688	752- 812	4.22
MS9219-24	1 750	815- 875	4.33
MS9219-25	1 875	940-1 000	4 55
MS9219-26	2.000	1 065-1 125	4.77
MS9219-27	2.125	1 190-1 250	5.00
MS9219-28	2 250	1 315-1 375	5.23
MS9219-29	2 375	1 440-1 500	5 45
MS9219-30	2.500	1 565-1.625	5.67
MS9219-31	2 625	1 690-1.750	5 90
MS9219-32	2.750	1 815-1 875	6 13
MS9219-33	2.875	1.940-2.000	6.36
MS9219-34	3.000	2 065-2.125	6 58
MS9219-35	3 125	2 190-2 250	6.80
MS9219-36	3.250	2.315-2 375	7.03
MS9219-37	3.375	2 440-2 500	7.27
MS9219-38	3.500	2 565-2 625	7 50
MS9219-39	3.625	2 690-2 750	7 73

PART NO	L	K	APPROX WEIGHT LB/100
MS9219-40	3 750	2.815-2.875	7.95
MS9219-41	3 875	2.940-3 000	8.17
MS9219-42	4 000	3 065-3 125	8 40
MS9219-43	4 125	3.190-3 250	8 63
MS9219-44	4 250	3 315-3 375	8 86
MS9219-45	4 375	3 440-3 500	9 08
MS9219-46	4.500	3.565-3 625	9 30
MS9219-47	4 625	3.690-3 750	9 52
MS9219-48	4.750	3 815-3 875	9 74
MS9219-49	4 875	3 940-4 000	9 95
MS9219-50	5.000	4.065-4 125	10 17
MS9219-51	5.125	4.190-4 250	10.40
MS9219-52	5 250	4 315-4 375	10.63
MS9219-53	5 375	4.440-4 500	10.86
MS9219-54	5.500	4.565-4 625	11 10
MS9219-55	5 625	4 690-4 750	11 33
MS9219-56	5 750	4 815-4 875	11.56
MS9219-57	5 875	4 940-5 000	11 78
MS9219-58	6.000	5.065-5 125	12.00

1. SHANK SHALL BE STRAIGHT WITHIN 003 FIR. PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .015 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS. ROCKWELL C42-46.
7. FINISH. DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7459. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
9. SURFACE ROUGHNESS. AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 10 Dec 63 REVISED

P.A	TITLE	MILITARY STANDARD
USAF - ASD Other Cust Navy - Weps	BOLT, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATE, DOUBLE HEXAGON EXTENDED WASHER HEAD, 3125-24 UNJF-3A	MS 9219 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 OCT 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-063/5-670

Reviewers and Users: USAF - ASD, Navy - Weps

The standard has been approved by the ASD (Department of the Air Force) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:13Z
Check the source to verify that this is the current version before use.