FED SUP CLASS
5305

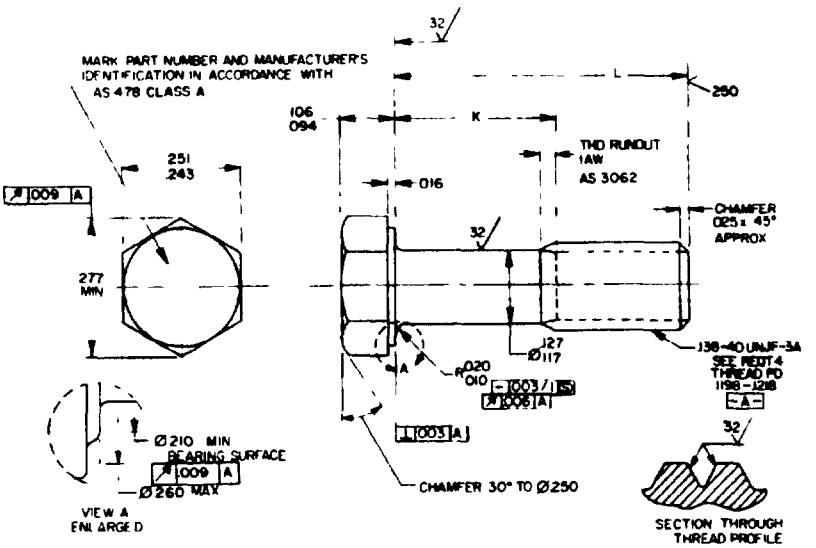


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	F	APPROX WEIGHT LB/100
-02	250	058- 078	.25
-03	.312	058- 078	.27
-04	.375	058-.078	.30
-05	.438	058- 078	32
-06	.500	.058-.078	.34
-07	.562	.058-.078	37
-08	625	058- 099	39
-09	688	.102-.162	.42
-10	750	164- 224	44
-11	.812	226-.286	46
-12	.875	.289-.349	.49
-13	.938	.352-.412	51
-14	1 000	414- 474	.53
-15	1 062	476- 536	56
-16	1.125	539-.599	.58
-17	1 188	602- 662	61
-18	1.250	664-.724	.63
-19	1.312	.726- 786	.65
-20	1.375	789- 849	.68
-21	1 438	852- 912	70
-22	1.500	.914-.974	72

© ENTIRE STANDARD REVISED

APPROVED 2 FEB 68 REVISED © 22 MAY 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

PREPARING ACTIVITY: NAVY-AS; Other Govt ARMY-AV; AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: SCREW, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .138-40 UNJF-3A	MILITARY STANDARD MS9516
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1623

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS

1 MATERIAL IN ACCORDANCE WITH AMS 6322-80

2 PROTECTIVE COATING AND SURFACE TREATMENT CADMIUM PLATE IN ACCORDANCE WTIH AMS 2400-80 DIMENSIONS SPECIFIED ARE AFTER PLATING.

3 HARDNESS: 26-32 HRC

4 THREADS THREADS IN ACCORDANCE WITH MIL-S-8879

5. SURFACE TEXTURE SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.

6 DIMENSIONING AND TOLERANCING· DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

7 HEAD TO SHANK FILLET HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -10 AND SMALLER.

8 TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°

9 MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83

10 EDGES. BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED

11. PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE 1

EXAMPLE MS9516-02

DASH NUMBER

BASIC MS NUMBER

MS9516-02 INDICATES - SCREW, MACHINE, HEXAGON HEAD, 138-40 UNJF-3A, LENGTH 250

NOTES

1. ALL DIMENSIONS IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

APPROVED 2 FEB 68 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-13

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY—AS Other Coast ARMY—AV AIR FORCE—99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .138-40 UNJF-3A	MILITARY STANDARD MS9516
PROCUREMENT SPECIFICATION A S 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1623

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.