
MS9893

FED. SUP CLASS 5305

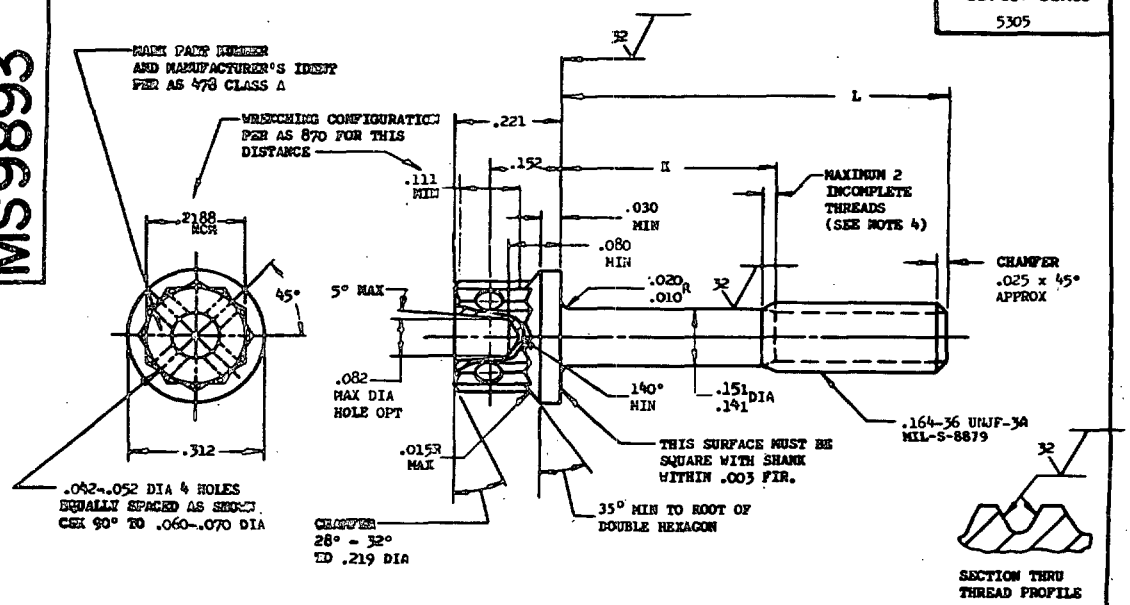

PART NO.	L	K	APPROX WEIGHT LB/100
MS9893-02	.250	.062 -.082	.412
MS9893-03	.312	.062 -.082	.442
MS9893-04	.375	.062 -.082	.472
MS9893-05	.438	.062 -.082	.503
MS9893-06	.500	.062 -.082	.532
MS9893-07	.562	.062 -.082	.561
MS9893-08	.625	.062 -.082	.591
MS9893-09	.688	.062 -.110	.622
MS9893-10	.750	.112 -.172	.650
MS9893-11	.812	.174 -.234	.679
MS9893-12	.875	.237 -.297	.710
MS9893-13	.938	.300 -.360	.739
MS9893-14	1.000	.362 -.422	.768
MS9893-15	1.062	.424 -.484	.799

PART NO.	L	K	APPROX WEIGHT LB/100
MS9893-16	1.125	.487 -.547	.828
MS9893-17	1.188	.550 -.610	.857
MS9893-18	1.250	.612 -.672	.888
MS9893-19	1.312	.674 -.734	.916
MS9893-20	1.375	.737 -.797	.945
MS9893-21	1.438	.800 -.860	.974
MS9893-22	1.500	.862 -.922	1.006
MS9893-23	1.562	.924 -.984	1.035
MS9893-24	1.625	.987-1.047	1.065
MS9893-25	1.688	1.050-1.110	1.092
MS9893-26	1.750	1.112-1.172	1.123
MS9893-27	1.812	1.174-1.234	1.155
MS9893-28	1.875	1.237-1.297	1.184
MS9893-29	1.938	1.300-1.360	1.214
MS9893-30	2.000	1.362-1.422	1.242

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .005 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5616.
6. MANUFACTURING SPECIFICATION: AMS 7470 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
8. HARDNESS: ROCKWELL C32-38.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 21 Apr 69 REVISED

Review activities: USAF - 82, 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11
Other Cust
Navy - AS

TITLE
SCREW, MACHINE-DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, AMS 5616, .164-36 UNJF-3A

MILITARY STANDARD
MS9893

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Related coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5305 - F008

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.