MIL-A-8421F
25 October 1974
SUPERSEDING
MIL-A-8421E(USAF)
19 September 1973

MILITARY SPECIFICATION

AIR TRANSPORTABILITY REQUIREMENTS, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers general design and performance requirements of military equipment for air transportability on fixed-wing Air Force aircraft. The complete air transportability requirements for an item of equipment not specified herein shall be specified in the individual equipment specification (see 6.3).

1.2 Applicability. The requirements and tests contained in this specification apply to the air transportability aspects of all items of military equipment. They represent the minimum acceptable transportability features. When it is known that the equipment will require transportability features that are more severe than the transportability features stated herein, the transportability features may be more stringent in the individual equipment specification.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-T-25959	Tie Down, Cargo, Aircraft
MIL-T-27260	Tie Down, Cargo Aircraft CGU-1/B
MIL-P-27443	Pallet, Cargo, Aircraft, Type HCU-6/E, HCU-12/E, and HCU-10/C
MIL-N-27444	Net, Cargo Tiedown, Pallets HCU-7/E, HCU-15/C, HCU-11/C and HCU-16/C

FSC 1510

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

STANDARD

Military

MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Air Force Bulletin

Bul 518	Cargo Aircraft Compartment Dimensional Data

Air Force Manual

AFM 71-4	Packaging and Handling of Dangerous Materials for Transportation by Military Aircraft
Also:	TM 38-250
	NAVSUP Sup 505
	MCOP 4030-19
	DSAM 4145.3

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 Selection of standards and specifications. Standards and specifications for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.2 Size and configuration of equipment items. Equipment items shall be of such size and configuration that they can be loaded into an aircraft as a unit. When specified in the governing specification, partial disassembly and packaging will be permitted. General cargo capability information on current Air Force aircraft is provided in Bulletin 518 (see 6.4). Detailed aircraft size limitations can be found in the technical order for a particular aircraft (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

3.2.1 To facilitate handling, the equipment shall be as compact and lightweight as practical; however, reliability and maintainability shall not be substantially impaired in meeting this requirement. Any projected design compromise for the sake of air transportability shall be brought to the attention of the procuring activity.

3.2.2 It shall be possible to load the equipment into the aircraft and readily position the equipment without damage to the aircraft structure using a minimum amount of handling equipment.

3.2.3 It shall be possible to secure the equipment against all forces encountered during flight, taxiing, and ground handling of aircraft without damage to the aircraft or equipment (see 3.3.4).

3.3 Design. Design features of equipment shall meet the following general requirements:

3.3.1 Size limitations. The configuration of the equipment to be air transported or airdropped shall be such as to allow emergency access from the front to the rear of the aircraft and allow safe loading/unloading.

3.3.1.1 Air transport. Equipment and cargo to be air transported shall be such that a 6-inch minimum clearance between the top/sides of the equipment and aircraft interior is maintained at all times during loading and flight. The data as specified in table I is a basic guide as to equipment size limits. See 6.5 for specific data.

TABLE I. Air Transportable Equipment Dimensional Limits

	C-130	C-141	C-5
Height	102	103	156
Width	111*	111	216
Length	480	834	1551

* On the C-130 aircraft the floor is limited to a clear width area of 105 inches. This limitation is for a height of 5 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

3.3.1.1.1 Emergency access. On aircraft without catwalks (C-141 and C-5 have catwalks) in the cargo compartment, a minimum clear space on the left hand side of the aircraft, when facing forward, of 14 inches wide by 72 inches high, or 30 inches wide by 48 inches high, shall be maintained at all times. On aircraft with catwalks, these catwalks shall be kept free of all cargo to allow passage of crew members.

3.3.1.2 Airdrop. Equipment developed for airdrop must take into consideration auxiliary equipment to perform this mission, such as platforms, parachutes, webbing straps, and energy dissipating material to absorb kinetic energy during impact. The unit load, herein called the rigged load, shall meet the following size limitations:

a. Width: The overall width shall not exceed 108 inches. Items exceeding this width require a safety of flight waiver (see 6.6).

b. Height: The overall height of the equipment as a rigged load shall be such as to maintain adequate clearance between the load and aircraft structure during airdrop and emergency gravity drop.

3.3.2 Aircraft floor loading. Axle loads, wheel loads, tire footprint loads, and general floor loads, as determined from the plan view of the equipment, shall conform to the fuselage zone and compartment limitations for the aircraft concerned. Detailed allowable floor and roller load limits can be found in the technical order for a particular aircraft. Palletized and platform loads shall not exceed aircraft roller load limits.

3.3.3 Wheeled equipment. In addition to the requirements herein, wheeled equipment shall approach, negotiate, and depart a ramp 15 feet long at an angle of 17° connecting two horizontal surface.

3.3.4 Equipment restraint criteria. The equipment shall be capable of being restrained to and withstand, without loss of serviceability, the following forces applied statically and independently:

Fore	3 g
Aft	1-1/2 g
Lateral	1-1/2 g
Up	2 g
Down	4-1/2 g

(1 g is equal to the weight of the equipment. Thus, for example, 3 g would be a force of three times the equipment weight.) (Directions provided are relative to the aircraft.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

a. The equipment shall also withstand the forces applied dynamically for 0.1 second.

b. When the equipment is of such size or configuration that it can be loaded into cargo aircraft with only a particular axis parallel to the longitudinal axis of the aircraft (i.e., a truck that can be driven forward or backed into the aircraft), the highest load factor shall be used in both directions. When the loading direction is fixed or specified for an item (i.e., a truck only can be driven forward into the aircraft), the 3-g requirement need be met only in the forward direction and a 1-1/2 g requirement shall be applicable in the rearward direction.

c. A minimum of 4-1/2 g vertically downward in such a direction that equipment carried in a cargo compartment imposes a load on its wheels or supports in a downward direction.

d. If an item is designated for airdrop, then the aft load factor shall be 3 g.

3.3.4.1 Accompanying loads. Where equipment is capable of carrying, or having attached to itself, additional equipment and the order or contract requires this accompanying load to be air transported with the equipment, the entire unit load shall be required to meet the requirements of 3.3.4 (i.e., a truck with a load carrying capability shall be tested with maximum accompanying air transported load). The additional equipment shall be independently tested to insure restraint to the main item of equipment. Where the air transported load is different from the general load capability of the vehicle, the allowable load shall be marked in accordance with 3.4.1.2.

3.3.4.2 Transported equipment. When equipment is of a size or configuration wherein it can be transported secured to a pallet that locks into an integral aircraft rail system or secured within an enclosed container or van, that equipment need not meet the requirements of 3.3.5. However, the entire unit load shall meet the requirements of 3.3.4.

3.3.5 Attachments

3.3.5.1 Attachment devices. Equipment shall be provided with attachment points that will accommodate both ends of the tiedown devices specified in 3.3.5.1.1 and shall be marked in accordance with 3.4. These attachment points shall be suitable for use in conjunction with the attachment points on the aircraft floor which, in general, have a capacity of 10,000 pounds and are placed on 20-inch centers. The attachment points shall permit the application of adequate restraint to the equipment when subjected to the accelerations specified in 3.3.4.

3.3.5.1.1 If the configuration of the equipment permits the use of the following tiedown devices of the appropriate rated capacity and provides adequate

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

strength in a particular tiedown location without the use of standard attachment fittings, provisions for the attachment fittings specified in 3.3.5.1 in such locations may be deleted:

Item Nomenclature	Specification	Rated Capacity
Tie Down, Cargo, Aircraft CGU-1/B	MIL-T-27260	5,000 pounds
Tie Down, Cargo, Aircraft	MIL-T-25959	10,000 pounds (MB-1). 25,000 pounds (MB-2).

3.3.5.2 Location of attachments. The location of provisions for attachment fittings shall be determined after considering the following:

a. Tiedown grid patterns for the particular aircraft in which the equipment is to be transported, including the number and location of higher capacity tiedown points

b. The location of attachment points on the aircraft in view of requirements for personnel escape clearances and flight aisleway clearances

c. Position of attachment points around the horizontal periphery of the equipment

d. Position of attachment points with reference to the vertical center of gravity of the equipment

e. Angle of tiedown with horizontal plane

f. Accessibility of attachment points on both equipment being transported and aircraft in which equipment is transported

g. Loading diagrams for similar equipment as depicted in the appropriate aircraft handbook

h. Accessibility of points on the equipment that must be serviced during flight.

3.3.5.3 Number of attachments. The number of locations for attachment fittings shall be not less than four.

3.3.5.4 Attachment size. The attachment point shall be capable of accepting the maximum number of tiedowns as required by the tiedown grid pattern (3.4.1.1).

3.3.5.5 Attachment utilization. When an attachment point on the equipment is utilized to achieve restraint in more than one direction as required by the tiedown grid pattern (3.4.1.1), that attachment point shall withstand the vector

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

sum of the restraint forces in the vector direction acting simultaneously or the forces as listed in 3.3.4, whichever is greater.

3.3.5.6 Tiedown pattern. Unless specified in order or contract, a proposed tiedown grid pattern shall be provided for either C-130 or C-141 aircraft. (See 6.6 and 6.7.)

3.3.6 463L compatibility

3.3.6.1 System description. The 463L air cargo handling system consists of separate, but interdependent, equipment families. These include terminals, on-board aircraft cargo handling systems, ground handling equipment, and pallets and nets. The pallets are used as a unitization module and are loaded into the aircraft on roller conveyors. A 463L equipped aircraft has roller conveyor assemblies and integral locks. A pallet/net assembly, as defined in 3.3.6.2, and secured into an aircraft rail/locking system meets the requirements of 3.3.4.

3.3.6.2 Pallets and nets. Equipment that can be placed on a pallet and secured by a net need not meet the requirements of 3.3.4. However, the unit load shall not exceed the floor loading as required by 3.3.2. The above applies to the following pallet/net combinations:

a. HCU-6/E pallet - MIL-P-27443, type I

(1) Overall dimensions: 108 by 88 by 2-1/4 inches

(2) Usable floor dimensions: 104 by 84 inches

(3) Net assembly: Two HCU-7/E side nets and one HCU-15/C top net conforming to MIL-N-27444

(4) Rated capacity: 10,000 pounds

b. HCU-10/C pallet - MIL-P-27443, type II

(1) Overall dimensions: 54 by 88 by 4-1/2 inches

(2) Usable floor dimensions: 50 by 84 inches

(3) Net assembly: Two HCU-11/C side nets and one HCU-16/C top net conforming to MIL-N-27444

(4) Rated capacity: 5,000 pounds

(5) This pallet is not compatible with the C-130, C-141, and C-5 aircraft 463L rail system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

c. HCU-12/E pallet - MIL-P-27443, type III

(1) Overall dimensions: 54 by 88 by 2-1/4 inches

(2) Usable floor dimensions: 50 by 84 inches

(3) Net assembly: See 3.3.6.2b(3)

(4) Rated capacity: 5,000 pounds

(5) This pallet is not compatible with the C-130, C-141, and C-5 aircraft 463L rail system.

3.3.6.3 Pallet and integral base design. Where equipment is to be transported on its own base or pallet designed as an integral part of that equipment, it shall meet the following:

a. The pallet/base side lip shall be designed to and meet the requirements of MIL-P-27443

b. The bottom of the pallet/base shall be capable of transversing all types of roller conveyors as shown on figure 1, unless particular sets are specified. The unit load shall withstand down loadings as required in 3.3.4 on all sets of rollers unless particular sets are specified

c. The pallet width for the C-130, C-141, and C-5 aircraft shall be 108 inches +0 -1/8

d. The unit load shall meet the requirements of 3.3.4


e. When loaded in final configured state, the pallet/base shall withstand being towed over a 17°, 10-foot-long ramp connecting two horizontal surfaces. The pallet/base shall be supported by C-141 conveyors on one horizontal surface and 25K loader conveyors on the second horizontal surface, or other designated conveyor combinations.

3.3.7 Dangerous materials. Where equipment is capable of carrying, or having attached to itself, dangerous materials, the containment or packaging of these materials shall meet the requirements of AFM 71-4, TM 38-250, NAVSUP Sup 505, MCOP 4030-19, and DSAM 4145.3. This, for example, includes all combustible liquids such as gasoline, on a vehicle, and any munitions.

3.4 Markings

3.4.1 Equipment. Equipment shall be marked to provide the information necessary to facilitate loading in the aircraft. Unless otherwise specified, the marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

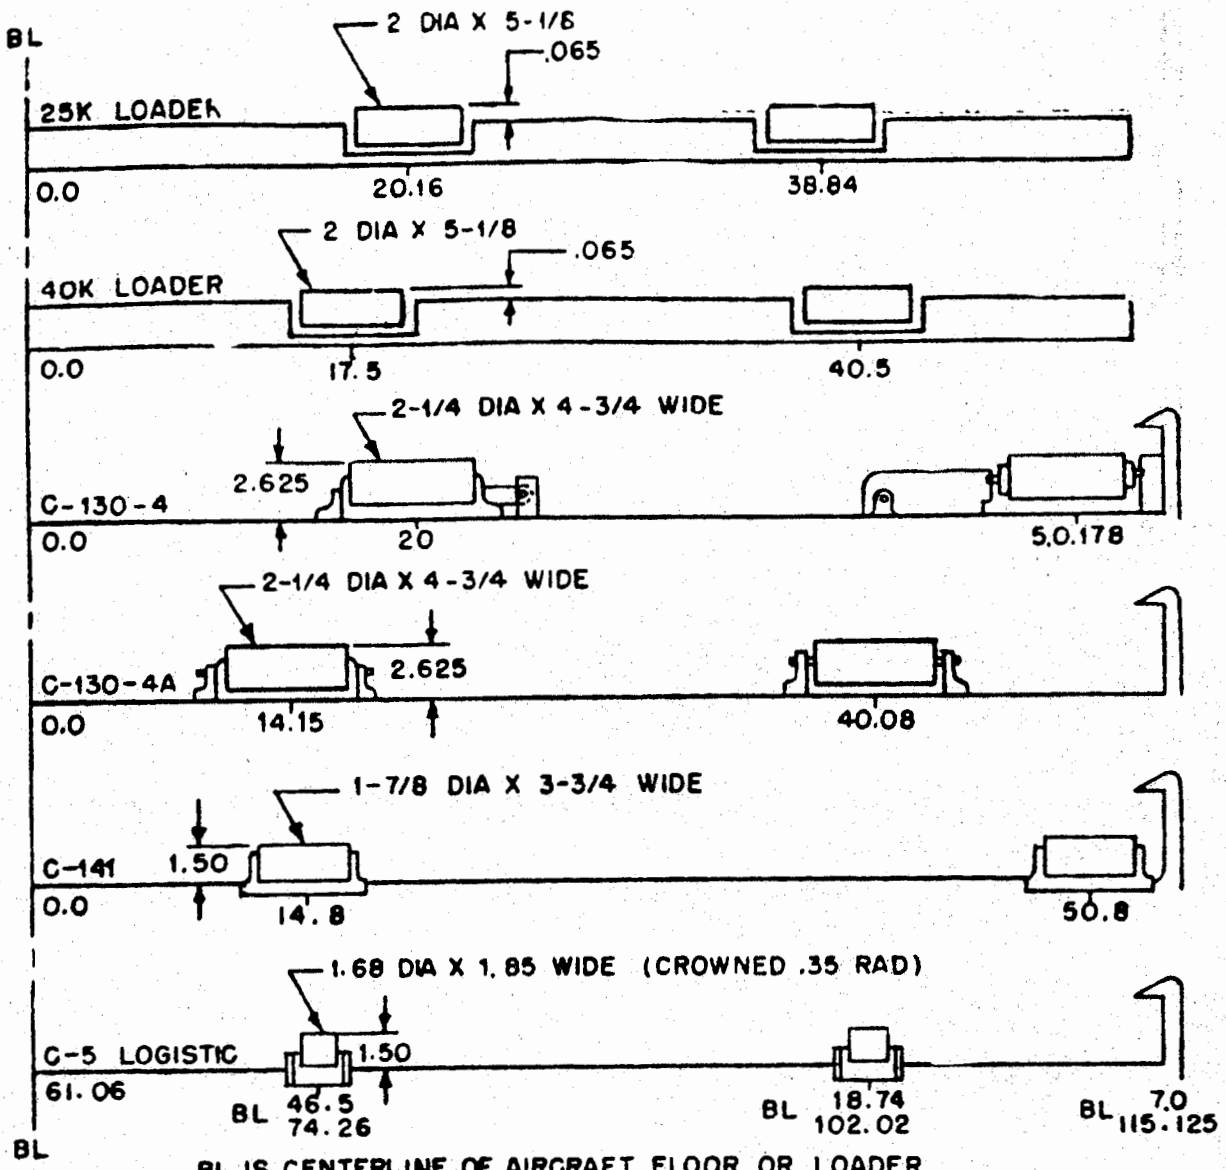

BL IS CENTERLINE OF AIRCRAFT FLOOR OR LOADER ROLLERS ARE ON 10-INCH CENTERS FORE AND AFT, EXCEPT C-5 WHICH IS 5.285 INCHES.

DIMENSIONS IN INCHES

FIGURE 1. Aircraft and Loader Roller Locations

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

shall be stenciled in an appropriate location or provided on the vehicle data plate. Marking shall include at least the following.

3.4.1.1 Tiedown fittings. Tiedown attachments or fittings shall be identified, and the allowable load shall be indicated, and a representative tiedown grid pattern shall be proposed for aircraft as defined in the order or contract. If no aircraft is defined in the order or contract, the tiedown grid pattern shall be proposed for both the C-130 and C-141 aircraft. This does not apply to equipment that meets the requirements of 3.3.4.2.

3.4.1.2 Shipping weight and center-of-gravity location. The shipping weight of the equipment in an air transportable condition shall be marked in a conspicuous location. The center-of-gravity along each axis influencing the method of loading and tiedown shall be marked on the item.

3.4.1.3 Hoisting fittings. When equipment or cargo is to be hoisted onto an aircraft or onto a pallet or platform, the hoisting fittings shall be identified and the required hoisting capacity marked. The locations where forklifts may be applied shall be identified.

3.4.2 Other markings. Other markings shall be provided to cover the following, where applicable:

a. Instructions for retraction of wheels or casters to provide greater bearing surface or clearance

b. Installation of special struts or braces to meet flight loads

c. Orientations in aircraft when critical

d. Instructions for special servicing or other preparation for air shipment

e. Other precautions to be observed during loading, flight, or unloading.

3.5 Special tools and transportability equipment. Special tools and equipment necessary to load and off-load the transport aircraft as well as any special tools and ground support equipment required to disassemble and reassemble the equipment being shipped, shall be identified and reported to the procuring activity.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Air transportability tests. Air transportability tests shall be performed on developmental test items, preproduction test items, qualification test items, or sample items as provided for in the individual equipment specification. (See 6.6.)

4.2.1 Examination of product. The item of equipment, drawings, or other data defining the item shall be examined to determine conformance to the requirements of this specification. Deviations from these requirements not permitted by the individual equipment specification shall be cause for rejection.

4.2.2 Ramp test. The wheeled vehicle shall be driven or towed up and over a 17°, 15-foot long ramp connecting two horizontal ramps without any part of the vehicle chassis touching any of the three ramp sections.

4.2.3 Analytical equipment restraint proof. An analytical proof shall be submitted to show that the equipment and all its components will conform to the requirements and tests specified herein. The analytical proof shall be subject to verification by actual test on any component.

4.2.3.1 Alternate equipment restraint test. When specified in the contract, order, or as an alternate to the analytical equipment restraint proof, the equipment shall be restrained in the same configuration as when loaded aboard an aircraft. The item shall be subjected to the forces specified in 3.3.4. This is normally accomplished by physically pulling on various components of the equipment to the loads specified. Following these tests, the equipment shall be examined, operated, and subjected to the performance tests specified in the individual equipment specification. Evidence of permanent deformation of structural members or failure to operate and meet the performance requirements of the individual equipment specification shall be cause for rejection.

4.2.4 Loading demonstration. The equipment shall be loaded into aircraft typical of those in which it normally could be carried and in the manner specified by the loading handbook for the aircraft. Difficulties encountered in this loading operation shall be recorded with particular reference to interference with aircraft structure, damage to cargo floor, or unusual positioning operation required. This record shall be submitted to the procuring activity. The equipment then shall be tied down in accordance with the restraint criteria specified in the loading handbook of the aircraft. Further details on the arrangement of tiedown attachments to the aircraft floor shall be included in the test instructions. Equipment that exceeds limits as specified by 3.3.1.1 shall be submitted for review prior to test (see 6.6). Items that fall within limits specified by 3.3.1.1 may be tested on an aircraft mock-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

4.2.4.1 Any difficulty in achieving a satisfactory tiedown shall be noted. Following the tiedown demonstration, the equipment item shall be unloaded and any difficulties encountered during the operation shall be noted. When specified in the order or contract, demonstrations of satisfactory loading, tiedown, and unloading characteristics may be made by means of scale models or comprehensive scale drawings showing each stage of operation.

4.2.5 Conveyor tests. Where a pallet or base is designed in accordance with 3.3.6.3 it shall meet the following tests. Any permanent deformation caused by the test to the pallet or base shall be cause for rejection.

4.2.5.1 The pallet or base in final configuration with maximum load shall be moved a minimum of 10,000 feet on C-141 roller conveyors, or other designated aircraft conveyors, in the same direction as it would be normally placed into the aircraft, at a minimum speed of 30 fpm. Any increment of movement shall be a minimum of 25 feet. If the pallet/base can be loaded at 90° to the normal loading configuration, this test shall be conducted in both directions.

4.2.5.2 The pallet or base in final configuration with maximum load shall be towed up and over a 17°, 10-foot long ramp connecting to horizontal ramps at a minimum towing cable speed of 20 fpm. This test shall be conducted 25 cycles in each direction that the pallet/base can be loaded into the aircraft. The conveyors on one horizontal ramp shall be of C-141 configuration, and 25K loader on the other horizontal ramp, or other designated combination of aircraft loader conveyors. The pallet/base shall be supported by no more than four C-141 rollers or other aircraft conveyors during cresting. Each time over the crest of the 17° ramp is one cycle.

5. PREPARATION FOR DELIVERY

5.1 This section is not applicable to this specification.

6. NOTES

6.1 Intended use. This specification is intended to establish uniform requirements and tests for air transportability characteristics to be incorporated in the design of military equipment.

6.2 General application. Prior to use of this specification, the required operating conditions of the particular item of equipment should be reviewed to determine the applicable air transportability criteria. The tests of this specification may be modified or supplemented to meet the individual air transportability requirements of the equipment; for instance, bomb bay transportability, modification of aircraft, or special handling methods that must be applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

6.3 Requirements to be included in the individual equipment development specification. The following information should be included in the individual equipment development specification to further define the degree and type of air transportability required:

a. General aircraft class, such as large cargo aircraft, or individual aircraft type(s), to include model designation in which equipment will be transportable

b. Special loading conditions, such as transporting in bomb bay or carrying external to the aircraft structure

c. Amount and kind of disassembly permissible to achieve loading in a particular aircraft; e.g., removal of wheel assembly to load a van type semitrailer in the C-141 aircraft

d. Special provisions, such as auxiliary wheels or full swiveling casters necessary to meet a particular loading configuration or positioning requirement

e. Loading and unloading time allowable to achieve a particular aircraft turn-around time. Also, time required for equipment to be operational after air landing, in the case of assault or staging operations

f. Detailed structural limitations of the attachment provisions on the item being transported for equipment designed to transport other items

g. Overall weight and size limitations imposed by aircraft. Also, weight and size limitations imposed by air cargo ground handling equipment should be considered. Limitations of internal aircraft cargo handling provisions should also be considered if these are to be used.

6.4 Air Force Bulletin 518 should be used only for general information (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

6.5 Technical orders. The following technical orders will provide data on aircraft floor loading, aircraft dimensions, and aircraft loading instructions:

TO 1C-5A-9 - C5

TO 1C-7A-9 - C-7A

TO 1C-97D-9 - C-97D
C-97E
C 97G
C 97K
HC-97G
KC-97L

TO 1C-118A-9 - C-118A
R6D-1

TO 1C-119B-9 - C-119C
C-119G
C-119J
R4Q-2

TO 1C-121C-9 - C-121C
C-121G

TO 1C-123B-9 - C-123B
C-123J
C-123K

TO 1C-124A-9 - C-124

TO 1C-130A-9 - C-130A
RC-130A
C-130B
C-130D
C-130E

TO 1C-130(H)H-2-12 - HC-130H
HC-130N
HC-130P

TO 1C-135(K)A-9 - KC-135A

TO 1C-141A-9 - C-141

6.6 Information on obtaining assistance and directions for test loading is contained in Research and Development - DOD Engineering for Transportability, Army Regulation 70-44; OPNAV (Navy) Instruction 4600.22A; Air Force Regulation 80-18; Marine Corps Order 4610.14B; and Defense Supply Agency Regulation 4500.25. Additional information on this specification and all requests for test loading on Air Force transports shall be submitted to the Air Transportability Test Loading Agency ASD/ENCMD. All requests for test loadings, deviations and safety of flight waivers shall be submitted by or thru Government Agencies.

ASD/ENCMD
Wright-Patterson AFB, OH 45433

Telephone:	Air Transport	Airdrop
Autovon	78-55192 78-54708	78-55342 78-52966
Commercial	513-255-5192 513-255-4708	513-255-5342 513-255-2966

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.

6.7 Data. Data generated by this specification shall be made a contractual requirement by means of DD Forms 1423, citing Data Item Descriptions contained in the Department of Defense Authorized Data List (TD-3).

6.8 International standardization agreements. Certain provisions in 3.3.4 and 3.3.5 of this specification are the subject of international standardization agreements ASCC Air Standards 44/3 and 44/17 and STANAG 3500, paragraphs 1.b and 1.c., items (1) and (2). When amendment, revision, or cancellation of this specification is proposed which affects or violates the international agreements concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

6.9 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Air Force - 11
Army - MT
Navy - AS

Reviewers:
Air Force - 84
Army - AV, EL, GL, AT, MI, ME, EA, WC
Navy -

Preparing activity:
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:24Z
Check the source to verify that this is the current version before use.