MIL-G-8266C(USAF)
29 July 1957

Superseding
MIL-G-008266B(USAF)
25 October 1955
MIL-G-8266A(ASG)
26 February 1954

MILITARY SPECIFICATION

GAGE, LIQUID OXYGEN CONTENT, DIAL INDICATING, 5-LITER 70-PSI CONVERTER

1. SCOPE

1.1 This specification covers one type of liquid oxygen contents gage for indicating the quantity of liquid oxygen in a 5-liter, 70-pound-per-square-inch gage liquid oxygen converter. This gage is not suitable for use with other liquid oxygen converters.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

BB-O-925	Oxygen, 99.5 Percent, Gas and Liquid
PPP-B-566	Boxes; Folding, Paperboard
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-591	Boxes, Fiberboard, Wood-Cleated
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes; Fiber
PPP-B-676	Boxes, Set-Up, Paperboard
PPP-T-60	Tape; Pressure Sensitive Adhesive, Waterproof - For Packaging and Sealing

Military

JAN-P-100	Packaging and Packing for Overseas Shipment, General Specification

FSC6685

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

JAN-P-108	Boxes, Fiberboard, Corrugated and Solid (Military Type)
MIL-P-116	Preservation, Methods Of
MIL-B-138	Boxes, Wood, Fiberboard-Lined For Overseas Shipment (For Weight of Contents Not Exceeding 500 Pounds)
MIL-B-4229	Boxes; Paperboard, Metal-Stayed
MIL-D-5028	Drawings and Data Lists; Preparation Of Manufacturers' (For Production Aeronautical and Associated Equipment)
MIL-N-6011	Nitrogen; Liquid and Gas
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT
MIL-T-9107	Test Reports; Preparation Of
MIL-B-10377	Box, Wood, Cleated, Veneer, Paper Overlaid
MIL-L-10547	Liners, Case, Waterproof
MIL-L-25142	Luminescent Material; Fluorescent
MIL-L-25567	Leak Test Compound, Oxygen Systems

STANDARDS

Air Force-Navy Aeronautical

MIL-STD-129	Marking For Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property
MS33548	Case, Instrument, 1-7/8 Dial, Standard Dimensions For

DRAWINGS

Air Force-Navy Aeronautical Standard Drawings

AND10053	Bosses; Pipe - Thread, Internal - Standard Dimensions For

PUBLICATIONS

Air Force-Navy Aeronautical Bulletin

No. 143	Specifications and Standards; Use of

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction.- This specification makes provisions for preproduction testing.

3.2 Selection of Specifications and Standards.- Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with ANA Bulletin 143 except as provided in 3.2.1 and 3.2.2.

3.2.1 Commercial Parts.- Commercial parts having suitable properties may be used where, on the date of invitation for bids, there are no suitable standard parts. In any case, commercial utility parts, like screws, bolts, nuts, cotter pins, having suitable properties may be used provided:

a. They can be replaced by the standard parts (MS or AN) without alteration.

b. The corresponding standard part numbers are referenced in the parts list and, if practical, on the contractor's drawings.

3.2.2 Standard Parts.- With the exception in 3.2.1, MS and AN standard parts shall be used where they suit the purpose. They shall be identified on the drawings by their part numbers.

3.3 Materials.- Materials shall be as specified herein. When materials are used that are not specifically designated, they shall be entirely suitable for the purpose.

3.3.1 Metals.- Metals shall be of the corrosion-resistant type unless suitably protected against corrosion during normal service life. Nonferrous materials shall be used for all parts of the gage, except where ferrous materials are essential and do not come in direct contact with the oxygen. Nonmagnetic materials shall be used for all parts of the instrument, except where magnetic materials are essential.

3.3.2 Non-Metallic Material.- Any non-metallic material that is easily deteriorated or otherwise easily affected adversely by continued use with oxygen shall not be used. Any rubber or silicone materials used shall be stamped with the cure date, month and year. The case shall be stamped with the manufacture date. Gages will not be shipped from the manufacturer containing material with the cure date over 1 year old.

3.3.3 Luminescent Marking Material.- Luminescent material used for dial marking shall conform to MIL-L-25142.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

3.4 Design.- The gage shall be designed to indicate the quantity of liquid oxygen remaining in the 5-liter, 70-pound per square inch gage liquid oxygen converter. It shall have a range of 0 to 5 liters. It shall operate from the pressure caused by the head of liquid in the converter. The gas pressure is balanced out by a separate connection to the gage. The design shall conform to figure 1.

3.5 Construction.- The gages shall be so constructed that no parts will work loose in service. They shall be leakproof and shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service. Pivots, bearings, and gears shall neither bind nor shake and shall be as near frictionless as practicable.


3.5.1 Case.- The case shall be made of either a suitable ferrous or nonferrous low-density material and shall have a smooth surface with a durable dull black finish. The front of the case for the liquid oxygen contents gage shall conform to MS33548 except as noted in figure 1.

3.5.2 Pointer.- The pointer shall be light and sufficiently rigid to prevent oscillation under vibration. It shall be firmly attached to the mechanism but shall be readily adjustable. The pointer shall be free to swing beyond the high end of the range without being engaged by a mechanical stop. An overpressure stop shall be provided on the gage to restrain the mechanism rather than the pointer. The movement shall be limited so that it cannot move more than 20 degrees beyond the last graduation of the dial, nor far enough to disengage the sector from the pinion. The swing shall be dampened by restricting gas flow past the gage to a low rate. The pointer shall be suitable for the purpose and shall be short enough that all numerals are legible. Enough of the pointer shall be painted with luminescent material conforming to MIL-L-25142, that the pointer can be easily identified in the dark.

3.5.3 Dial.- The dial shall be marked with luminescent paint, as shown on figure 2. The markings shall be sufficiently durable to withstand usage encountered in service.

3.5.4 Cover Glass.- The cover glass shall be clear, flat, colorless, and free from flaws which would seriously affect the readibility of the gage. The distance from the dial to the inner surface of the cover glass shall be the minimum practicable and shall not exceed 0.200 inch. The distance from the outer surface of the cover glass to the extreme front of the case shall be the minimum practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

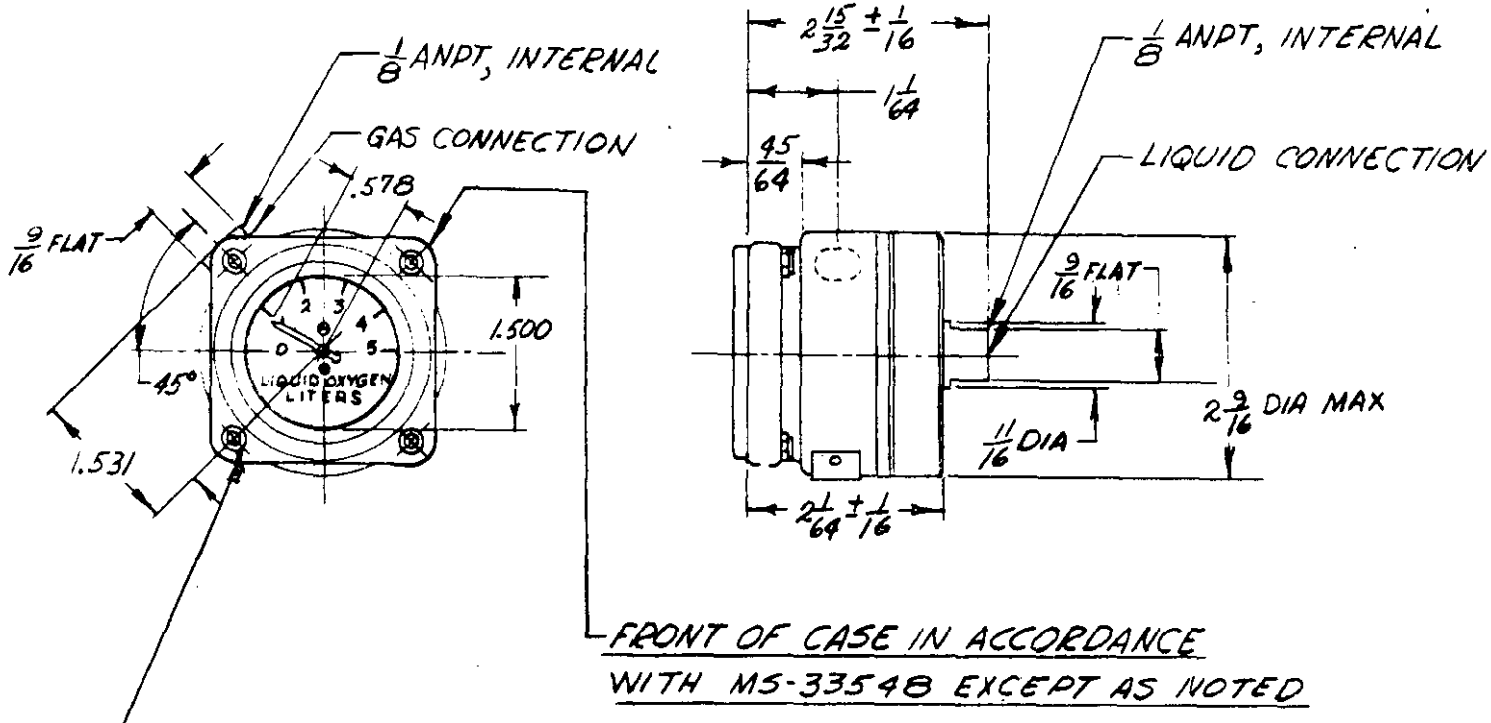

FRONT OF CASE IN ACCORDANCE WITH MS-33548 EXCEPT AS NOTED

COMMERCIAL PRODUCT MUST BE EQUAL TO AND INTERCHANGEABLE WITH PART No. 68L24-6R ELASTIC STOP NUT CORP. OF AMERICA, UNION, NEW JERSEY FOUR REQ'D.

BOSSES IN ACCORDANCE WITH DRAWING AND10053


FIGURE 1. DETAILS OF 5 LITER OXYGEN GAGE

5.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ±.005 ANGLES. ± 1°

MIL-G-8266C(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

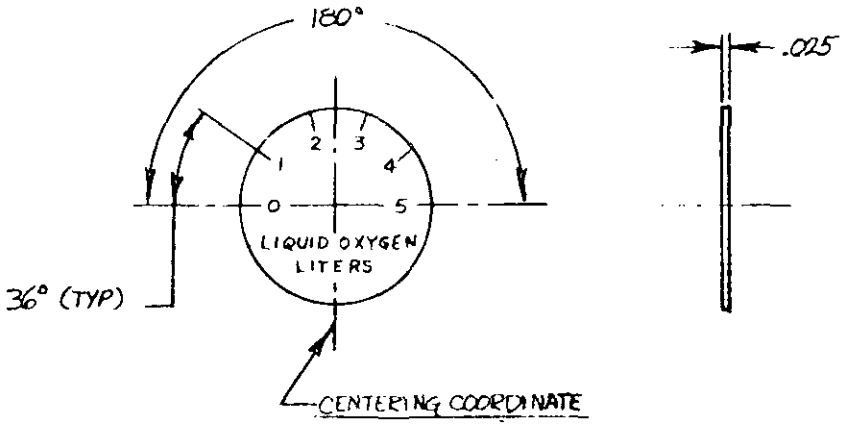

MARKING	HEIGHT OR LENGTH	WIDTH OF LINE OR GRADUATION	MATERIAL
LETTERING "LIQUID" OXYGEN	.093		ALL GRADUATIONS AND NUMERALS: FLUORESCENT LUMINESCENT MATERIAL SPEC MIL-L-25142
"LITERS"	.093 HIGH		
CENTER COORDINATE	1/32	.010	
ALL GRADUATIONS	3/16	.031	
NUMERALS	1/8	.020	
BACKGROUND OF DIAL			DURABLE DULL BLACK

FIGURE 2 DIAL MARKINGS

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED
TOLERANCES: FRACTIONS, ± 1/64
DECIMALS, ± .005
ANGLES, ± 1°

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

3.6 Interchangeability.- All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation, performance, and design. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of MIL-D-5028.

3.7 Threads.- All pipe threads shall conform to MIL-P-7105.

3.8 Weight.- The weight of the complete gage shall not exceed 1.0 pound.

3.9 Performance

3.9.1 Scale Error.- The gage shall be capable of indicating the quantity of liquid oxygen in a 5-liter, 70-pounds per-square-inch gage converter in the temperature range of minus 65 degrees to plus 160 degrees Fahrenheit, within the scale errors specified in table I. Error shall not exceed that specified either before or after tapping the liquid contents gage. The gage shall be capable of operation as specified herein after being exposed to a temperature of plus 160 degrees Fahrenheit for 7 hours. The gage shall also be capable of operation as specified herein after being exposed to a temperature of minus 65 degrees Fahrenheit for 7 hours.

TABLE I
Scale Errors

Quantity (liters)	Maximum scale error at room temperature (degrees - ±)	Maximum scale error at -60°F and +160°F (degrees - ±)	Pressure in inches of water
0	5	7	1.75
1	5	7	2.65
2	5	7	3.60
3	5	7	4.60
4	7	9	5.55
5	8	10	6.75

3.9.2 Leakage.- Leakage shall not exceed 1 milliliter per minute from the case when a pressure of 80 pounds per square inch is applied to both connections.

3.9.3 Cover Glass.- The cover glass shall withstand a pressure differential of 600 pounds per square inch when tested as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

3.9.4 Damping.- The gage shall be capable of producing a reading of "full" between 6 and 18 seconds after being subjected to a surge differential pressure twice as great as that required to hold the pointer at the full mark.

3.9.5 Overpressure.- The gage shall be capable of meeting the requirements of the scale error at room temperature test after being subjected to 120 pounds per square inch pressure, applied to both connections, and after application of 350 and 15 pounds per square inch pressure to the gas and liquid connections respectively, the other connections vented to the atmosphere.

3.9.6 Endurance.- The gage shall be capable of satisfactory operation after being subjected to 500 applications of a differential pressure equal to full range of the gage.

3.9.7 Orientation.- The gage shall be capable of satisfactory operation while mounted in any position.

3.9.8 Vibration.- The gage shall be capable of satisfactory operation while being vibrated at a frequency between 300 and 3,000 cycles per minute and a double amplitude of between 0.018 and 0.020 inch.

3.9.9 High Temperature Exposure.- The gage shall be capable of operating as specified herein after being subjected to a temperature of plus 160 degrees Fahrenheit, plus or minus 2 degrees Fahrenheit, for a period of 48 hours.

3.9.10 Low Temperature Exposure.- The gage shall be capable of operation as specified herein after being subjected to a temperature of minus 80 degrees Fahrenheit, plus or minus 2 degrees Fahrenheit, for a period of 48 hours.

3.10 Identification of Product.- The gage shall be marked in accordance with MIL-STD-130.

3.10.1 Warning Note.-A decalcomania marked with 1/8-inch high red letters reading "USE NO OIL" shall be permanently attached to the case.

3.11 Workmanship.- The gages shall be constructed in a thoroughly workmanlike manner. The finished gages shall be clean and free from any defects that might affect appearance or functionability. They shall be completely free from grease, oil, or other material that would be dangerous in contact with high pressure oxygen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of Tests.- The inspection and testing of gages shall be classified as follows:

a. Acceptance tests ..... See 4.2
b. Preproduction testing ..... See 4.3

4.2 Acceptance Tests.- Acceptance tests shall consist of the following:

a. Individual tests
b. Sampling plan and tests

4.2.1 Individual Tests.- Each gage shall be subjected to and meet the following tests as described under 4.5 Test Methods of this specification:

a. Examination of product
b. Scale error at room temperature
c. Leakage
d. Cover glass

4.2.2 Sampling Plan and Tests

4.2.2.1 Sampling Plan.- One gage shall be selected at random from every 100 gages, or fraction thereof, produced and subjected to the following tests:

a. Damping
b. Scale error - temperature extremes
c. Overpressure
d. Endurance
e. Orientation
f. Vibration

4.2.2.1.1 Rejection and Retest.- When one item selected from a production run fails to meet the specification, no items still on hand or later producted shall be accepted until the extent and cause of failure are determined.

4.2.2.1.2 Individual Tests May Continue.- For operational reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or produced later shall not be made until it is determined that the items meet all the requirements of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.2.2.2 Defects in Item Already Accepted.- The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found, and methods of correcting them.

4.3 Preproduction Testing

4.3.1 Preproduction Test Sample Tested by the Contractor.- The contractor shall subject two gages to the preproduction tests specified in 4.3.4.

4.3.2 Preproduction Test Report.- After the contractor completes the preproduction tests, he shall prepare a preproduction test report according to MIL-T-9107 and furnish three complete copies of this report to the Government activity specified in 6.3.

4.3.3 Preproduction Test Sample for the Government Procuring Activity.- Along with the preproduction test report, the contractor shall submit one sample to the Government activity specified in 6.3.

4.3.4 Preproduction Tests.- Preproduction tests shall consist of all tests described under Test Methods.

4.4 Test Conditions

4.4.1 Atmospheric Conditions.- Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury and at a temperature of 77 degrees plus or minus 18 degrees Fahrenheit and a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from the above values, proper allowance shall be made for the changes in instrument reading.

4.4.2 All tests requiring gas pressure shall be accomplished using oxygen conforming to BB-O-925, type 1, grade A, or nitrogen conforming to MIL-N-6011.

4.4.3 Tapping.- Unless otherwise specified, the gage shall be tested with the gage dial in a vertical plane and shall be lightly tapped before a test reading is taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.5 Test Methods

4.5.1 Examination of Product.- Unless otherwise specified by the procuring activity, each gage shall be checked to determine conformance to this specification with respect to material, workmanship, weight, and markings.

4.5.2 Scale Error At Room Temperature.- The gage shall be tested to determine conformance to table I by connecting the liquid connection to a head of liquid equivalent to the amount specified in table I. The gage shall be tested at the equivalent head of each point in table I. The gage shall be within the accuracy limits specified both before and after tapping the gage at each point.

4.5.3 Leakage.- A pressure of at least 80 pounds per square inch shall be applied simultaneously to the gas and liquid connections of the gage. While under this pressure, the case shall be examined for leakage. Leakage in excess of 1 milliliter per minute shall be cause for rejection. Note: The pressure should be applied slowly so as not to damage the diaphragm. The pointer will remain steady when pressure is applied evenly to each side of the diaphragm. Diaphragm leakage shall be checked by applying leak test compound conforming to MIL-L-25567 to the gas port while at least 1 pound per square inch pressure is applied to the liquid port.

4.5.4 Cover Glass.- Each cover glass shall be mounted in the case in which the cover glass is to be used. With the cover glass properly installed in the case a pressure of 600 pounds per square inch shall be applied to the inside of the cover glass for a period of 5 minutes. There shall be no evidence of damage to the case or cover glass as a result of this test.

4.5.5 Damping.- With pressure on both connections of the gage equal, permitting the pointer to indicate zero, a pressure twice that requiring to hold the pointer at the full mark shall be applied to the liquid connection. This application shall be completed in less than 3 seconds. The gas port of the gage shall be open to the atmosphere during the test. The damping shall have the same effect on flow in the opposite direction. The test apparatus shall have no tubing inside diameters or orifices less than 1/4 inch, nor more than a 36-inch length of tubing. The pointer shall not reach the full mark in less than 6 seconds nor more than 18 seconds after the addition of pressure is started.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.5.6 Scale Error - Temperature Extremes.- The gage shall be tested at minus 65 degrees Fahrenheit and plus 160 degrees Fahrenheit to determine compliance with table I. Both the gas and liquid connections shall be connected to a head of liquid equivalent to the contents of a liquid oxygen converter, and the entire assembly brought to each of the temperature extremes. The gage shall be tested at the equivalent head of each point specified in table I. The gage shall be within the limits specified both before and after tapping the gage at each point.

4.5.7 Overpressure.- The gage shall be subjected to a pressure of 120 pounds per square inch, applied to both connections, for a period of not less than 10 minutes. Not less than 1 hour after release of this pressure, the gage shall be subjected to the scale error test at room temperature and shall be within the specified limits. A pressure of 350 pounds per square inch pressure shall then be applied for not less than 10 minutes to the gas connection with the liquid connection vented to the atmosphere. Not less than 1 hour following this test, the gage shall again be subjected to the scale error test and shall be within the specified limits. The gage shall then be subjected to a pressure of 15 pounds per square inch, applied for not less than 10 minutes to the liquid connection with the gas connection vented to the atmosphere. Not less than 1 hour after release of this pressure, the scale error shall be checked again and shall be within the accuracy limits specified.

4.5.8 Endurance.- The gage shall be subjected to 500 applications of a differential pressure equal to the full range of the gage. Not less than 1 hour following this test, the gage shall be subjected to the scale error at room temperature test and shall still be within the specified accuracy limits. Then 15 pounds per square inch pressure shall be applied to the liquid connection with the gas connection open to the atmosphere. The scale error shall then be checked again and shall be within the specified limits.

4.5.9 Orientation.- With differential pressure applied to the gage which will cause a deflection on the dial, the gage shall be turned through 180 degrees from the vertical to the horizontal to the vertical positions. The gage shall be subjected to constant vibration or tapping. The gage shall be subjected to the scale error at room temperature test in the 45-degree, 90-degree and 135-degree positions and shall still be within the accuracy limits specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.5.10 Vibration.- While mounted in a horizontal position, the gage shall be vibrated at a frequency between 300 and 3,000 cycles per minute and a double amplitude of 0.018 to 0.020 inch for a period of at least 3 hours. During 1 hour of this period, no pressure shall be applied to the gage. During the other 2 hours, a pressure of at least 70 pounds per square inch shall be applied to both connections. While the gage is being vibrated under the specified pressure, the pointer shall not vibrate over a range greater than 10 degrees. Following the 3-hour vibration period, the gage shall be subjected to the scale error at room temperature test and shall still be within the accuracy limits specified. No screws or parts shall become loosened as a result of this test.

4.5.11 High Temperature Exposure.- The gage shall be exposed to a temperature of plus 160 degrees Fahrenheit for a period of 48 hours. After the 48-hour period, the gage shall be allowed to return to room temperature and shall be subjected to the tests specified in 4.5.2 and 4.5.3.

4.5.12 Low Temperature Exposure.- The gage shall be exposed to a temperature of minus 80 degrees Fahrenheit for a period of 48 hours. After the 48-hour period, the gage shall be allowed to return to room temperature and shall be subjected to the tests specified in 4.5.2 and 4.5.3.

5. PREPARATION FOR DELIVERY

5.1 Levels of Preservation and Packaging

5.1.1 Level A.- Gages shall be preserved in accordance with MIL-P-116, method II, and packed in containers meeting MIL-B-4229, PPP-B-566, PPP-B-676, or JAN-P-108. For domestic shipment containers meeting PPP-B-636 may be used. Unit quantities shall be as specified by the procuring activity.

5.1.2 Level C.- Gages shall be preserved and packaged in accordance with the manufacturer's commercial practice.

5.2 Intermediate Packaging.- Only identical items shall be included in an intermediate package. For items preserved and packaged to meet 5.1.2, requirements for intermediate packaging shall be at the option of the contractor. Gages preserved and packaged to meet 5.1.1 shall be packaged in containers meeting PPP-B-636, PPP-B-676, MIL-B-4229, JAN-P-108, or PPP-B-566. Unless otherwise specified by the procuring activity, the quantity of unit packages to be included in each intermediate package shall be at the option of the contractor and as governed by the limitations of the container being used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

5.3 Levels of Packing

5.3.1 Level A.- Gages preserved and packaged to meet 5.1.1 and 5.2 shall be packed in exterior type shipping containers meeting PPP-B-591, PPP-B-621, JAN-P-108, MIL-B-138, PPP-B-585, PPP-B-601, or MIL-B-10377. As far as practical, exterior containers shall be of uniform shape and size, be of minimum cube and tare consistent with the protection required, and contain identical quantities. The gross weight of each pack shall be limited to approximately 200 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers shall be provided with a case liner conforming to MIL-L-10547 and shall be sealed in accordance with the appendix thereto. The case liner will not be required when the unit, intermediate, or exterior container conforms to JAN-P-108 and is sealed at all joints and seams, including manufacturer's joint, with tape conforming to PPP-T-60.

5.3.2 Level B.- Gages preserved and packaged to meet 5.1.1 and 5.2 shall be packed in domestic type exterior containers meeting PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-585, PPP-B-636, or MIL-B-10377. Exterior containers shall be of minimum cube and tare consistent with the protection required. As far as practical, exterior containers shall be of uniform shape and size and contain identical quantities. The gross weight of each pack shall be limited to approximately 500 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. When fiberboard containers are used, the fiberboard shall meet the special requirements table of PPP-B-636.

5.3.3 Level C.- Packages which require overpacking for acceptance by the carrier shall be packed in exterior type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall meet Consolidated Freight Classification Rules, or regulations of other common carriers as applicable to the mode of transportation.

5.4 Physical Protection.- Cushioning, blocking, bracing, and bolting as required shall be in accordance with JAN-P-100 except that for domestic shipment, waterproofing requirements for cushioning materials and containers shall be waived. Drop tests of JAN-P-100 shall be waived when preservation, packaging, and packing of the item are for immediate use, or when drop tests of MIL-P-116 are applicable.

5.5 Marking.- Interior and exterior containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended Use.- This gage is intended to be installed in aircraft, having 5-liter, 70-pound-per-square-inch-gage liquid oxygen converters, to indicate the quantity of liquid oxygen remaining in the converter.

6.2 Ordering Data.- Procurement documents should specify the following:

a. Preproduction requirements
b. Selection of applicable levels of preservation and packaging and packing.

6.3 Preproduction Approval

6.3.1 For equipment for use by the Air Force, requests for preproduction approval should be submitted to the Wright Air Development Center, ATTN: WCRD, Wright-Patterson AFB, Ohio.

6.3.2 Items will not be accepted on preproduction contracts (for both GFE and CFE) without written certification that preproduction testing has been accomplished and approved by the activity listed above.

6.3.3 Test samples, reports, and drawings should be sent directly to the activity listed above by the equipment manufacturer. Written certification (when approved) will be made directly to the manufacturer of the tested units.

6.3.4 The cost of preproduction design, samples, testing, and data will be borne by the equipment manufacturer.

6.3.5 Unless otherwise specified, preproduction samples will be retained by the activity listed above.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.