MILITARY SPECIFICATION

PUMP, HAND, AIR

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. - This specification covers one type of air hand pump for use with inflatable multi-place life raft assembles.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-W-321	Wire, Copper Alloy
RR-C-271	Chains and Attachments, Welded, Weldless, and Roller Chain
UU-T-81	Tags, Shipping and Stock
PPP-B-566	Boxes, Folding, paperboard
PPP-B-591	Boxes, Fiberboard, Wood-Cleated

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Continued)

Federal (Continued)

PPP-B-636	Box, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple Wall
PPP-B-676	Boxes, Set-Up
PPP-T-60	Tape, Packaging, Waterproof

Military

MIL-P-79	Plastic Rods and Tubes, Thermosetting, Laminated
MIL-P-116	Preservation - Packaging, Methods of
MIL-F-22191	Films, Transparent* Flexible, Heat Sealable, for Packaging Applications

STANDARDS

Federal

Fed. Test Method Std. No. 151	Metals; Test Methods

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-831	Test Reports; Preparation of
MIL-STD-889	Dissimilar Metals

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 Screw - Thread Standards for Federal Services

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.3.1 and 6.2).

3.2 Selection of Government documents. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials.

3.3.1 Metallic. All metallic parts shall be fabricated from corrosion-resistant metal or shall be suitably treated to resist corrosion.

3.3.2 Nonmetallic. All nonmetallic parts used in constructing the pumps shall have been manufactured not more than 12 months prior to the date of delivery of the pumps.

3.3.3 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals as specified in MIL-STD-889 shall not be used in intimate contact with each other.

3.3.4 Protective treatment. Materials used in the construction of the pump and hose shall be protected against deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

3.4 Design and construction. The pump and hose shall conform to figure 1. The pump shall be so constructed that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation and service.

3.4.1 Maintenance. The pump shall be so designed and constructed that the barrel, plunger or check valve may be replaced without special tools or damage to the pump and so that adjustment and repairs can be made readily by the personnel of operating units and overhaul bases.

3.4.2 Barrel . The barrel shall be black, paper-based phenolic laminated tubing, type PBG, conforming to MIL-P-79.

3.4.3 End plates. The pump shall be provided with a lower plate incorporating an air outlet and a check valve. The opposite end of the pump shall be provided with an upper plate incorporating an air inlet and a passage for the plunger stem. The plates shall be held firmly against the ends of the pump barrel by three rods or 3/8-inch wide bands evenly spaced around the circumference of the barrel. The lower end plate shall be sealed against the barrel by means of a synthetic rubber gasket.

3.4.4 Air discharge outlet. The air discharge outlet shall consist of an externally threaded outlet for attachment of the pump hose. The outlet shall project beyond the face of the end plate as shown in figure 1. The inner diameter of the opening through the outlet shall be 1/2 + 1/32, -O inch. The externally threaded outlet of the pump shall be provided with 13/16-20 UNS-2A threads.

3.4.5 Check valve. The check valve shall be of synthetic rubber or any other suitable material. The valve shall seal against a reverse flow of air when the pump is operated. The check valve shall be an integral part of the lower end plate or shall be installed in a separate plate adjacent to the lower plate.

3.4.6 Plunger assembly. The plunger assembly shall consist of a handle, stem, and piston.

3.4.6.1 Handle . The handle shall be approximately 3 inches long and l/2-inch wide and shall be securely fastened to the stem. Screws or rivets, if used for this purpose, shall be countersunk. The edges of the handle shall be rounded and smooth. Not less than a l-inch clearance shall be maintained between the handle and the upper end plate.

3.4.6.2 Stem. The stem shall be constructed of tubing having an outside diameter of not less than 3/8-inch and sufficient wall thickness *to* prevent bending if the pump is operated roughly. The stern

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T10:19Z
Check the source to verify that this is the currentversion before use.

shall be expanded between the handle and the stem passage to eliminate the possibility of the piston striking against the lower plate or check valve plate, if provided. A short length of ceil spring shall be installed around the stem to take up the shock at the end of the return stroke.

3.4.6.3 Piston. The piston shall be installed on the stem opposite the handle and shall consist of a cup and at least two washers, one on each side of the cup. The cup shall be of synthetic rubber or of any other suitable material. The cup material shall be self-lubricating to prevent drying. The washers shall be of such diameter and configuration that the cup will permit the passage of air on the return stroke and a minimum of leakage on the down stroke.

3.4.7 Hose. The hose shall be of the woven style with an inner tube of nonblooming compound of seamless construction and an abrasion-resistant outer cover. The hose shall have a l/2-inch minimum inside diameter and a l-inch maximum outside diameter. The construction of the hose shall be such that the hose shall not burst or leak during usage .

3.4.7.1 Hose connector. Each hose shall be provided with an internally threaded connector on one end and an externally threaded connector on the other end as shown in figure 1. The threads on the respective hose connectors shall be as specified in figure 1. The connectors shall be serrated and secured to the hose by means of a ferrule. The connector on the externally threaded end shall be constructed so as to allow full rotation of the threaded portion (in either direction) for connection to the life raft topping–off valves.

3.5 Threads. Threads shall be in accordance with Handbook H-28.

3.6 Performance .

3.6.1 Operation. The pump shall pass the operation test specified in 4.7.1.

3.6.2 Air discharge. The pump shall pass the air discharge *tests* specified in 4.7.2.1 and 4.7.2.2.

3.6.3 Operating force. The pump shall pass the operating force test specified in 4.7.3.

3.6.4 Pump leakage. The pump shall pass the leakage test specified in 4.7.4.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T10:19Z
Check the source to verify that this is the currentversion before use.

3.6.5 Impact. The pump shall pass the impact test specified in 4.7.5.

3.6.6 Hose flexibility. The hose shall not crack when tested as specified in 4.7.6.

3.6.7 Hose kinkfing. The hose shall not kink or show visible deterioration when tested as specified in 4.7.7.

3.6.8 Hose leakage. The hose shall not leak when subjected to an air proof pressure of 25 psi as specified in 4.7.8.

3.6.9 Salt spray. The hose shall pass the salt spray test specified in 4.7.9.

3.7 Weight. The weight of the pump without the hose shall not exceed 1.40 pounds.

3.8 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.9 Identification of product.

3.9.1 Pump. The pump shall be marked for identification in accordance with MIL-STD-130, and shall contain the following information in durable and legible markings:

PUMP, HAND, AIR ,
MIL-P-8258 (Revision as applicable)
CONTRACT NUMBER OR CONTRACTOR'S REQUISITION NUMBER
MANUFACTURER'S NAME
SERIAL NUMBER
DATE OF MANUFACTURE

A pressure sensitive decal or label containing the above information is considered an acceptable substitute.

3.10 Workmanship. Workmanship shall be such as to assure compliance with the requirements of this specification and shall be of good quality. Because of the emergency use of the equipment, it is essential that the pump assembly function properly under conditions to which it may be subjected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his on facilities or any *commercial* laboratory acceptable to the Government. The Governmen~ reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The examination and testing of the pumps shall be classified as:

a. First article inspections (4.3)

b. Quality conformance inspections (6.4)

4.3 First article.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of the contract or order, the manufacturer shall submit three pumps. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a manufacturer is in continuous production of these pumps from contract to contract, submission of further first article inspection samples on the new contract may be waived at the discretion of the procuring activity (see 6.2c). Approval of the first article inspection samples or the waiving of the first article inspection does not preclude the requirements for perfoming the quality conformance inspection. The first article inspection samples shall be furnished co the Government as directed by the Contracting Officer (see 6.2d).

4.3.2 First article inspection. First article inspection shall consist of performing all examinations and tests specified herein.

4.3.3 First article approval. Upon completion of the first article inspection program, recommendations and comments pertinent for use in monitoring production, will be forwarded by the Government Activity responsible for conducting the inspection program (see 6.2d) to the Contracting Officer. One approved sample will be returned to the manufacturer for use in monitoring production. The remaining samples will be consumed or destroyed in the first article inspection program and shall not be considered as part of the quantity to be delivered under the contract.

4.4 Quality conformance inspections. The quality con-formance inspections shall consist of the examinations and tests listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

TABLE 1. Examinations, tests, sample size and acceptance criteria

Inspection	Type of inspection	Test paragraph	Sample size	Acceptance criteria
Examination of pumps	Major and Minor	4.6.1	Every pump for defect and inspection level II for minor defects. 1/	Reject all pumps with any major defect and an acceptance quality level of 6.5 defects per hundred units for minor defects.
Operation	Major	4.7.1	Every pump	Reject all defective pumps.
Air discharge at 70°F	Major	4.7.2.1	Every pump	Reject all defective pumps.
Operating force	Major	4.7.3	S-2 1/	Acceptance number zero rejection number one.
Pump leakage	Major	4.7.4	Every pump	Reject all defective pumps.
Hose leakage 1/	Major	4.7.8	Every hose	Reject all defective hose.
Preparation for delivery	Major	4.6.3	Inspection level S-2 1/	Total acceptable quality level of 4.0 percent defective.

1/ The sample size shall be based only on the applicable sample size code letter corresponding to the specified inspection level of MIL-STD-105.

4.4.1 Sampling.

4.4.1.1 Inspection *lot.*

4.4.1.1.1 Pumps. An inspection lot size shall be expressed in units of one pump made essentially under the same conditions and from the same materials and components. The sample unit shall be one pump.

4.4.1. 1.2 Preparation for delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing pumps fully prepared for delivery from essentially the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

same materials and components. The sample unit shall be one shipping container, containing pumps fully prepared for delivery, except that it need not be sealed.

4.4.1.2 Sampling and acceptance criteria. The sample size and acceptance criteria shall be as specified in table I, as applicable. Sampling and acceptance shall be in accordance with MIL-STD-105.

4.5 Test conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury and a temperature of 77 ± 18°F, and a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from the above values, proper correction of test results shall be made for the change in instrument readings.

4.6 Examinations.

4.6.1 Pumps. Every pump shall be examined visually for major defects to determine conformance to this specification. Every pump selected as a sample unit from the lot shall be examined visually for minor defects. Table II shall be used to classify the defects found.

TABLE II. Classification of defects for the visual examination of the pumps

MAJOR	MINOR
1. Surface rough, misaligned, or containing cracks, nicks, burrs, sharp edges, or other flaws.	201. Surface unclean or containing embedded foreign matter.
2. Any component missing, malformed, corroded, fractured, or otherwise damaged.	202. Markings missing, insufficient, illegible, not permanent, or misplaced.
3. Any component loose, detached, not as specified, or otherwise not securely retained.	
4. Any threads missing, stripped, torn, broken, or otherwise defective.	
5. Incorrect assembly or improper positioning of any component.	
6. Any defective component or defect of assembly.	
7. Operation omitted or any operation improperly performed.	
8. Threads not as specified.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.6.2 Dimensions. The pumps and hoses shall be examined to determine if the dimensions are as specified herein.

4.6.3 Preparation for delivery. Each of the fully prepared shipping containers, containing pumps selected as sample units from the lot, shall be visually examined to determine that the packaging, packing and marking conform to this specification. Table III shall be used to classify the defects found.

4.7 Tests.

4.7.1 Operation. Each pump shall be tested for air discharge by moving the handle several times through the complete normal cycle of operation.

TABLE III. List of defects for preparation for delivery

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, illegible; of improper size, location, sequence, or method of application; markings on the interior or exterior containers not the same.
Materials missing,	Any nonconforming component; component damaged, or otherwise defective.
Workmanship	Inadequate application of the components, such as incomplete closure of the film bag, container flaps, loose strapping, etc.; bulging or distortion of the containers.
Content	Number per container is more or less than required; contains pumps of more than one type .

4.7.2 Air discharge. An airtight bag that, as nearly as practical, has had all the air removed from within shall be connected to the outlet of the pump. With the bag connected, the pump shall be operated at least 10 full strokes. The amount of air discharged per stroke shall be determined by dividing the volume of the inflated bag by the number of strokes.

4.7.2.1 Discharge at 70°F. The pump shall be exposed to a temperature of 70°F for a minimum of 24 hours and while still at this temperature the pump shall be tested as specified in 4.7.2. The discharge of air per stroke shall be no less than 32 cubic inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.7.2.2 Discharge at -65*F. The pump shall be exposed to a temperature of -65°F for a minimum of 24 hours and while still at this temperature the pump shall be tested as specified In 4.7.2. The discharge of air per stroke shall be not less than 10 cubic inches.

4.7.3 Operating force. The pump shall be held In a vertical position with the handle Up and fully extended with the air outlet open. A weight of 1 pound applied to the handle shall, within 5 seconds, depress the plunger assembly to the full “in” position.

4.7.4 P ump leakage. The plunger handle shall be fully extended and the air outlet capped. With the pump in a vertical position, a 15-pound force applied in line with the longitudinal axis of the pump shall not bring the plunger assembly to the fully returned position in less than 30 seconds.

4.7.5 Impact . The pump shall be dropped once in each of the following positions from a height of 4 feet on a concrete surface:

a. With the longitudinal axis of the pump parallel to the concrete surface and with the plunger assembly in the “out” position.

b. With the longitudinal axis of the pump 45 degrees *to* the concrete surface and with the plunger assembly in the “out” position and toward the concrete surface.

c. With the longitudinal axis of the pump 90 degrees to the concrete surface and with the plunger assembly in the “in” position and the handle toward the concrete surface.

Upon completion of these drops, the pump shall be subjected to and pass the following:

a.	Examination of pump	(4.6.1)
b.	Air discharge at 70°F	(4.7.2.1)
.	Operating force	(4.7.3)
d.	Pump leakage	(4.7.4)

4.7.6 Hose flexibility. The hose shall be exposed *to a* temperature of -65°F for 24 hours and while still at this temperature, the hose shall be bent 1/4 turn over a mandrel of the same temperature and having a diameter equal to 10 times the outside diameter of the hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

4.7.7 Hose kinking. The hose shall be bent around a mandrel having a diameter equal to 10 times the outside diameter of the hose and then maintained in this position and at 160°F for 4 hours.

4.7.8 Hose leakage. The hose shall be subjected to an oil-free internal air pressure of 25 psi for a minimum of 30 seconds. While this pressure is maintained, the leakage shall be determined by immersing the hose in water and observing for a continuous breakaway of bubbles or by noting the drop in the internal pressure of the hose. Any noticeable leakage shall be cause for rejection.

4.7.9 Salt spray. The pump and hose shall be subjected to a 96-hour salt spray test in accordance with Method "811 of Fed. Test Method Std. No. 151. After completion of this test, the pump and hose shall be subjected to and pass the following:

	Examination of pump	(4.6.1)
b.	Air discharge at 70°F	(4.7.2.1)
	Operating force	(4.7.3)
d.	Pump leakage	(4.7.4)

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each pump, including hose, shall be heat sealed within a snug–fitting film bag of 0.0015 inch gage material conforming to MIL-F-22191, Type I. Each pump, prepared as aforementioned, shall be preserved and cushioned in accordance with MIL-P-116, Method IC-5. No contact preservative is required. Erich pump shall be packaged within a snug; folding or set-up box conforming to PPP-B-566 or PPP-B-676. Forty unit packages shall be packaged within a fiberboard container confoming to PPP-B–636, type CF, class weather resistant, grade V3c, style RSC. Closure and sealing of the containers shall be in accordance with the appendix to PPP-B-636. All seams and joints shall be sealed with tape conforming to PPP-T-60.

5.1.2 Level C. The pumps shall he packaged to afford the minimim degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2). Shipping containers, insofar as possible, shall be uniform in size and shape and-of minimum cube and tare weight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. The pumps packaged as specified in 5.1.1, shall be packed in overseas type exterior containers conforming to PPP-B-5O1, PPP-B-636, or PPP-B-640, class 2. Closure and strapping of the containers shall be in accordance with the applicable container specification or appendix thereto. The gross weight of the packed shipping container shall not exceed the weight limitations of the applicable container specification.

5.2.2 Level B. The pumps, packaged as specified in 5.1.1, shall be packed in domestic type exterior containers conforming to PPP-B-591 , PPP-B-636, or PPP-B-640, class 1. Closure of the containers shall be in accordance with the applicable container specification or appendix thereto. The gross weight of the packed shipping container shall not exceed the weight limitations of the applicable container specification.

5.2.3 Level C. The packaged pumps, which the carrier requires to be packed, shall be packed within exterior type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. The shipment shall conform *to* the minimum requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking . Interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The pump assembly is intended for usc in hand inflation of inflatable *multi-place* life raft assemblies.

6.2 Ordering data. Procurement documents should specify:

a. Title, number and date of this specification (including amendments).

b. Quantity desired.

c. Whether first article inspection is waived (see 4.3.1).

d. Name and address of the first article inspection laboratory (see 4.3.1); including the name and address of the Government Activity responsible for conducting the inspection program (see 4.3.3).

e. Issuing of serial numbers (see 3.9.1 and Table I).

f. Applicable levels of packing and packaging {see 5).

g. When data is required (see 6.3).


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

6.3 Data. For the information of contractors and contracting officers, any of the data specified in applicable documents listed in section 2 of this specification or referenced lower-tier documents need not be prepared for the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NAVAIR Form 4200/15 (Drawings, Lists, and Specifications Required), shall be attached where applicable.

Custodian:
Navy - AS

Preparing Activity
Navy - AS
(Project No. 4220-N270)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

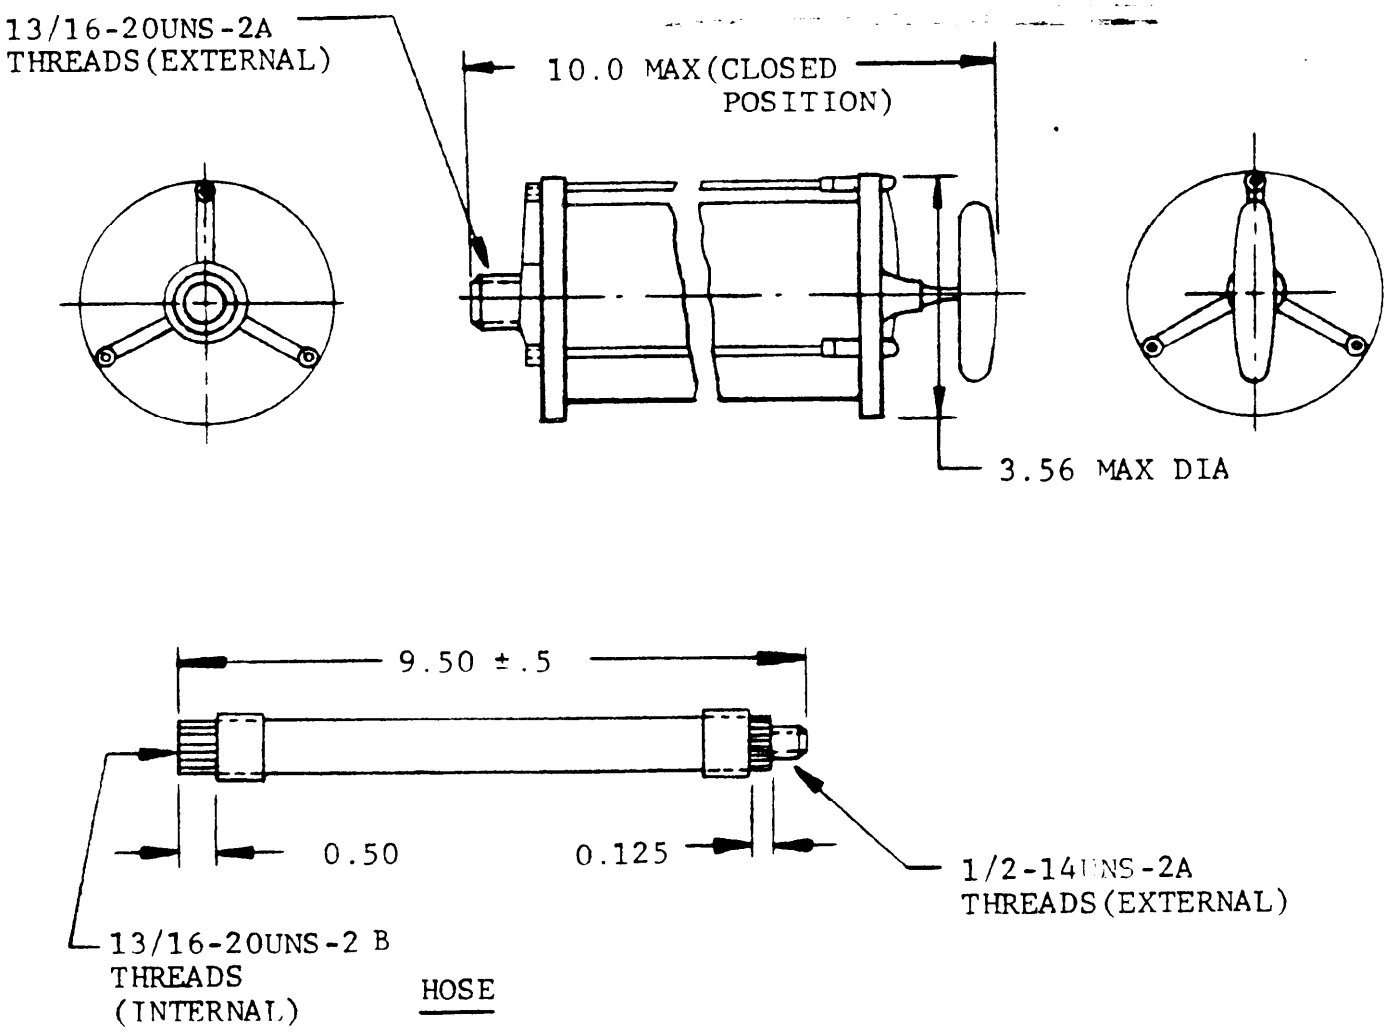

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ±.031

FIGURE 1. PUMP, HAND, AIR

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-8258D(AS)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:19Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Naval Air Engineering Center
ESSD (Code 9312)
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:19Z
Check the source to verify that this is the current version before use.