

FED. SUP CLASS
5340

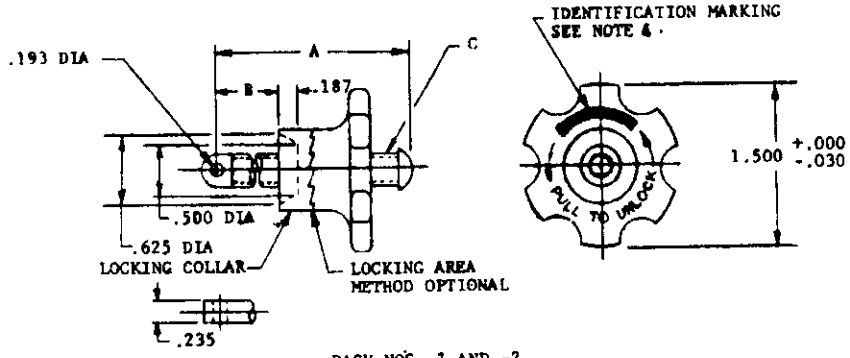

DASH NOS -1 AND -2

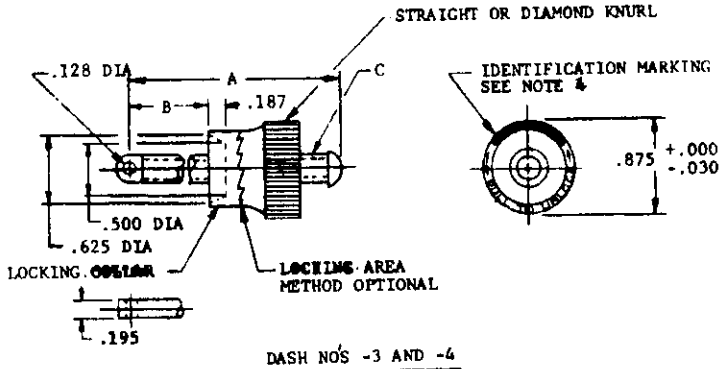

DASH NOS -3 AND -4

TABLE I

MS NUMBER	DASH NO.	A	(F) B MIN	C	LOAD (F) LBS MIN	MAX WT OZS
MS14108	-1	1.88	1.00	.312-24 UNF 2A	3,000	3
MS14108	-2	2.75	1.88	.312-24 UNF 2A	2,000	3
MS14108	-3	1.88	1.00	.250-28 UNF 2A	1,000	2.5
MS14108	-4	2.75	1.88	.250-28 UNF 2A	1,000	2.5

(F) ~~CANCELLED. Superseded by MIL-F-85731, MIL-F-85731/1 and MIL-F-85731/2.~~

(F) INACTIVE FOR NEW DESIGN AFTER APRIL 1988, USE MIL-F-85731. INTERCHANGEABILITY RELATIONSHIP: MS14108 AND MIL-F-85731 ITEMS IDENTIFIED BY THE SAME SIZE AND SUFFIX CHARACTERISTICS ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE.

(F) DENOTES CHANGES

APPROVED 25 JUNE 1971 REVISED (D) 15 OCT 82 (E) 14 APR 85 (F) 7 DEC 87

P.A. NAVY - AS Other Cust ARMY - USAF -	TITLE FASTENER, POSITIVE SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT	MILITARY STANDARD MS14108
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES	SHEET 1 OF 6

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 5340-1836 PLATE NO 23865

AMSC N/A

REVIEWER SYMBOLS: ARMY - AR, USAF - 85, DLA - IS
USER SYMBOLS: ARMY - AV, AT


DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Succession for all new engineering and design applications and for repetitive use shall be made from this document.


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

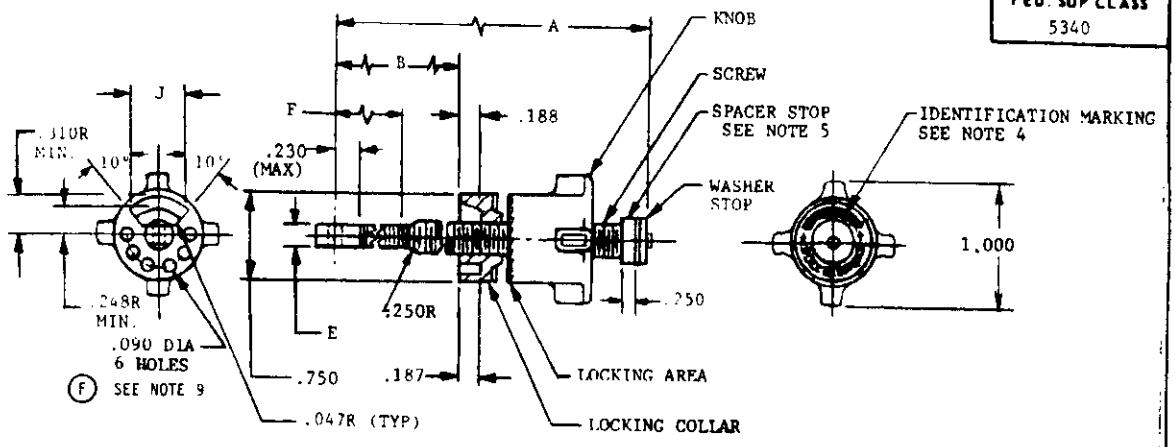

UNLOCKS BY PULLLING AND TURNING

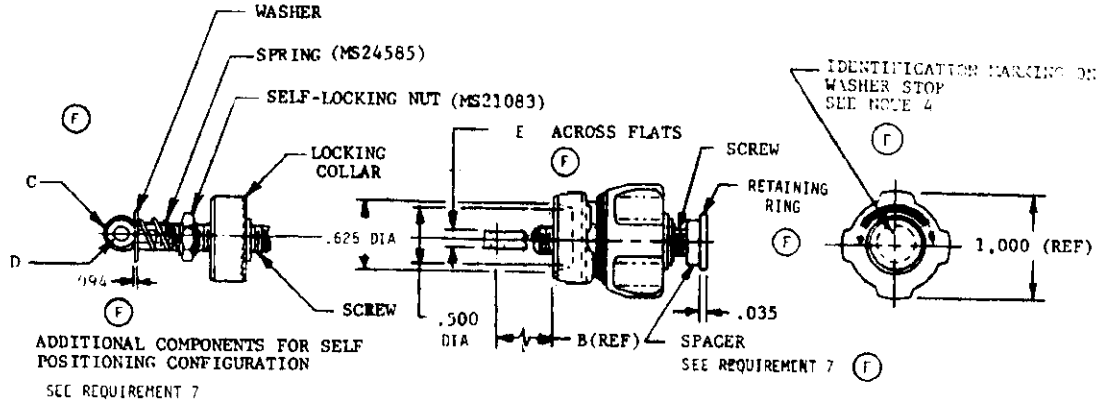

OPTIONAL KNOB AND LOCKING COLLAR

UNLOCKS BY TURNING

DASH NO.'S -5 THRU -10

TABLE II

MS NUMBER	DASH NO.	A	B MIN.	THREAD (UNF-3A) (F)	C RAD.	D +.003 -.000	E	F MAX. (F)	J FLAT MIN.	LOAD (LBS)
MS14108	-5	2.03	1.000	.250-28	.156	.128	.156	1.000	.510	1000
MS14108	-6	2.41	1.375	.250-28	.156	.128	.156	1.000	.510	1000
MS14108	-7	2.91	1.875	.250-28	.156	.128	.156	1.000	.510	1000
MS14108	-8	2.03	1.000	.312-24	.190	.160	.183	1.000	.510	2000
MS14108	-9	2.41	1.375	.312-24	.190	.160	.183	1.000	.510	2000
MS14108	-10	2.91	1.875	.312-24	.190	.160	.183	1.000	.510	2000

APPROVED 25 JUNE 1971 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 6.

REVIEWER SYMBOLS:
ARMY - AS
USAF - 85
DLA - IS

USER SYMBOLS:
ARMY - AV, AT

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by the Departments of Army, Navy, and Air Force, Selection for all new engineering and design applications and for replacement use shall be made from this document.

P.A.
NAVY - AS
Other Cust
ARMY - ER
USAF - 11

TITLE
FASTENER, POSITIVE SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT

MILITARY STANDARD
MS14108

PROCUREMENT SPECIFICATION

SUPERSEDES

SHEET 2 OF 6


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 71065

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5340

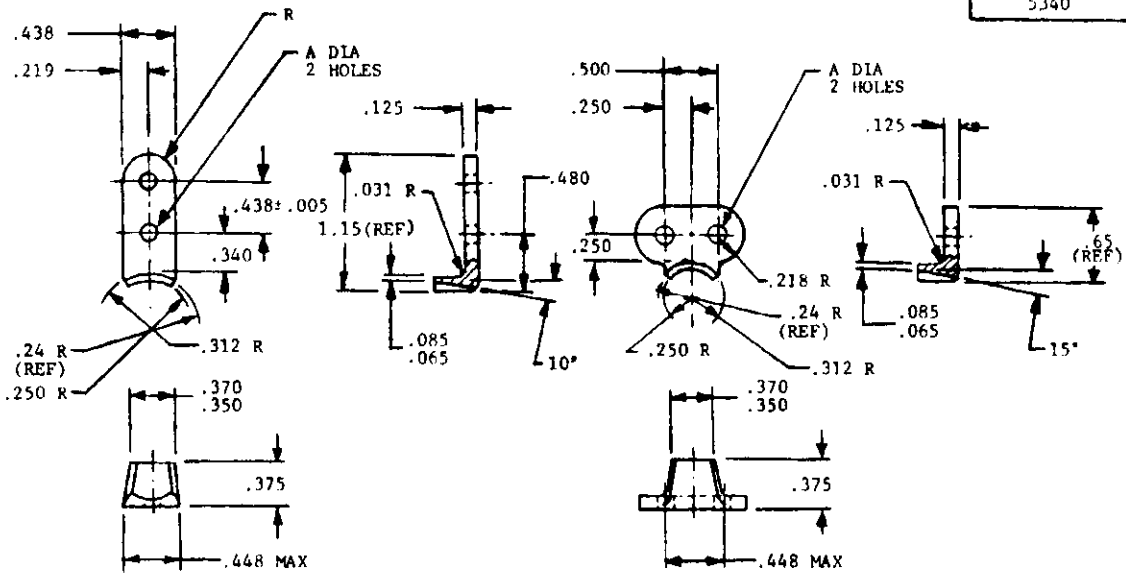

-11 AND -12 HOOK

-13 AND -14 HOOK

DASH NO.'S -11 THRU -14

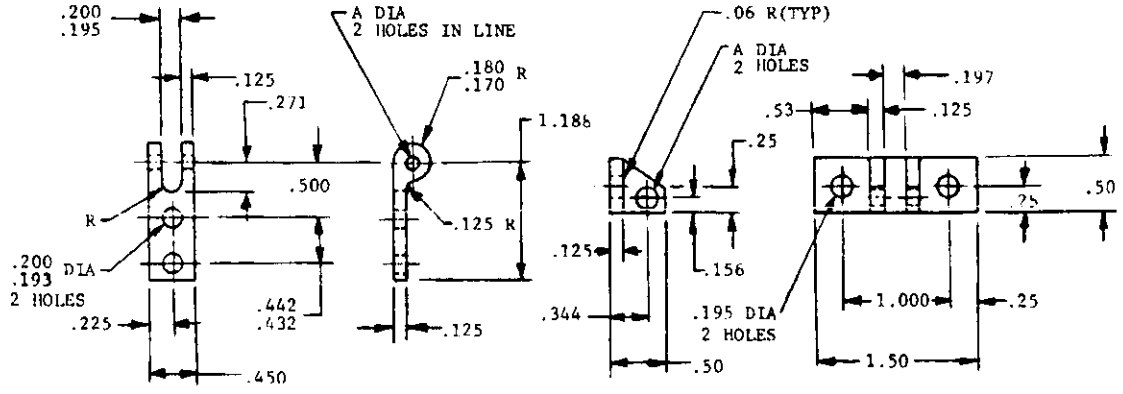

-15 AND -16 HINGE

-17 AND -18 HINGE

DASH NO.'S -15 THRU -18

TABLE III

MS NUMBER	DASH NO.		A	LOAD (LBS MIN)	MATING LATCH ASSY
	STEEL	CRES			
MS14108	-11	-11C	.167-.172	1000	-3,-4,-5,-6,-7
MS14108	-12	-12C	.193-.198	2000	-1,-2,-8,-9,-10
MS14108	-13	-13C	.167-.172	1000	-3,-4,-5,-6,-7
MS14108	-14	-14C	.193-.198	2000	-1,-2,-8,-9,-10
MS14108	-15	-15C	.128-.133	1000	-3,-4,-5,-6,-7
MS14108	-16	-16C	.160-.165	2000	-1,-2,-8,-9,-10
MS14108	-17	-17C	.128-.133	1000	-3,-4,-5,-6,-7
MS14108	-18	-18C	.160-.165	2000	-1,-2,-8,-9,-10

APPROVED 25 JUNE 1971 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 6

USER SYMBOLS: ARMY - AV, AT

REVIEWER SYMBOLS: ARMY - AR, USAF - 85, DLA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circular 4a should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for revisions shall be made from this document.

P.A.
NAVY - AS
Other Cust
ARMY - ER
USAF - 11

TITLE
FASTENER, POSITIVE SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT

MILITARY STANDARD
MS14108

PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 3 OF 6


DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


PLATE NO 23065

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

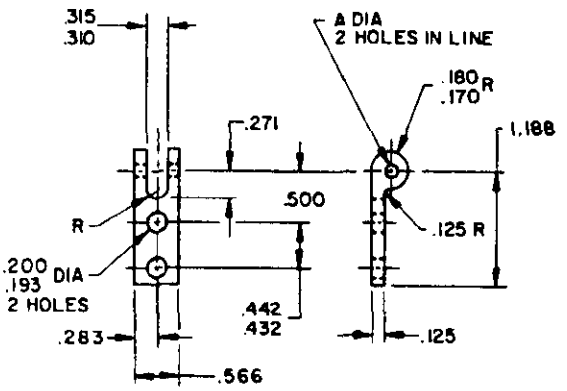

(F) -19 AND -20 HINGE

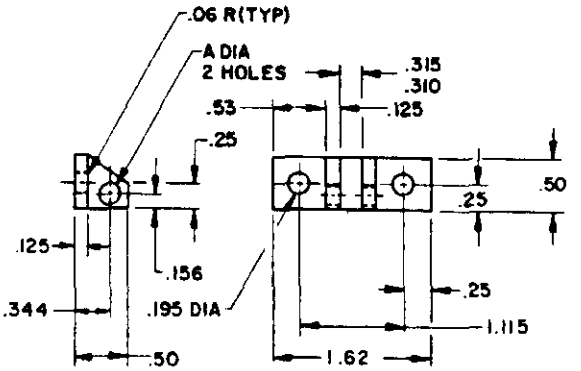

(F) -21 AND -22 HINGE

(F) TABLE IV.

DASH NO.		A	LOAD (LBS MIN)	MATING LATCH ASSY
STEEL	CRES			
-19	-19C	.128-.133	1000	-5, -6, -7
-20	-20C	.160-.165	2000	-8, -9, -10
-21	-21C	.128-.133	1000	-5, -6, -7
-22	-22C	.160-.165	2000	-8, -9, -10

APPROVED 25 JUNE 1971 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 6

USER SYMBOLS:
ARMY - AV, AT

REVIEWER SYMBOLS:
ARMY - AR
USAF - 85
DLA - ES

"Review/user information is current as of the date of this document. For future consideration of changes to this document, draft provision should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

A/MSC N/A

P.A. NAVY — AS Other Cust ARMY - ER USAF - 11	TITLE FASTENER, POSITIVE SELF-LOCKING CAST MOUNTING ELECTRONIC EQUIPMENT	MILITARY STANDARD MS14108
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 6

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (See Requirement 13):

1. THE FASTENER SHALL WITHSTAND 7,000 OR MORE CYCLES OF LOCKING AND UNLOCKING WITHOUT DEGRADATION OF PERFORMANCE.

2. THE FASTENER SHALL LOCK IN INCREMENTS OF NOT MORE THAN 30° (FOR -1 THRU -4) AND 15° (FOR -5 THRU -10).

3. THE FASTENER SHALL TIGHTEN BY TURNING KNOB ASSEMBLY CLOCKWISE AND SHALL LOCK UPON RELEASE OF THE KNOB ASSEMBLY. UNLOCKING SHALL BE ACCOMPLISHED BY PULLING AND/OR TURNING THE KNOB ASSEMBLY COUNTER-CLOCKWISE. NO TOOLS SHALL BE REQUIRED TO TIGHTEN, LOCK OR UNLOCK THE FASTENER.

4. THE FASTENER SHALL NOT BECOME LOOSE OR UNLOCK UNDER VIBRATION OR SHOCK WHEN SUBJECTED TO MIL-STD-810, METHOD 514, PROCEDURE I, CURVE E AND TIME SCHEDULE I AND METHOD 516, PROCEDURE I USING SHOCK PULSE 516-2.

5. FASTENER SHALL NOT UNLOCK WHEN A TORQUE OF 125 INCH - POUNDS IS APPLIED TO DASH NOS. 1 AND 2 OR 75 INCH - POUNDS IS APPLIED TO DASH NOS. 3 AND 4.

6. FASTENER SHALL MEET SPECIFIED LOADS PER TABLE I, II, AND III. ORIENTATION SHALL BE SUCH THAT THE LOAD LINE (THE LINE FROM THE PIN CENTER TO THE CONTACT POINT BETWEEN THE LOCKING COLLAR AND THE EQUIPMENT HOOK) IS AT AN APPROXIMATE ANGLE OF 45°. SEE FIGURE 1 BELOW.

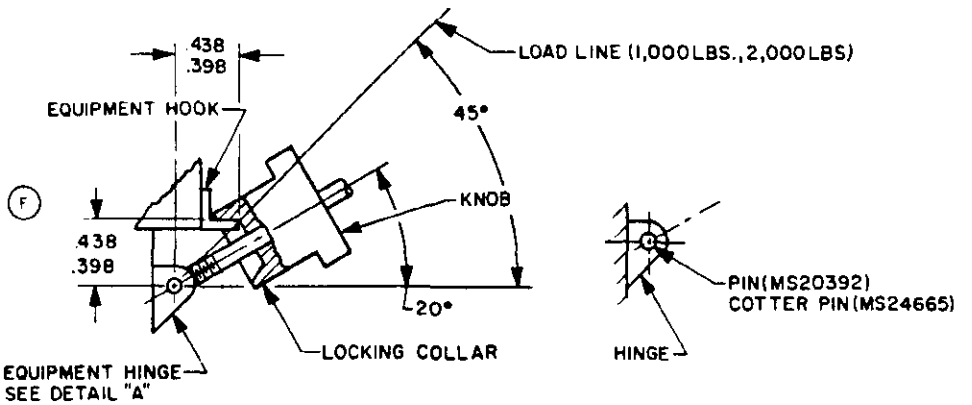


FIGURE 1 DETAIL A

7. THE SELF POSITIONING CONFIGURATION OF THIS FASTENER WILL ALLOW THE LATCH ASSEMBLY TO REMAIN ORIENTED IN ANY DESIRED POSITION AFTER EQUIPMENT REMOVAL. THIS CONFIGURATION SHOULD BE UTILIZED WHERE THE UNATTACHED LATCH ASSEMBLY WILL HANG IN A POSITION WHICH WOULD INTERFERE WITH THE INSTALLATION OR REMOVAL OF OTHER EQUIPMENT. THE SPACER STOP CONFIGURATION REDUCES "B" DIMENSION (AT MAXIMUM OPEN POSITION) BY .250.

(F) 8. THREADS SHALL BE ROLLED.FOR -5, -6, & -7 .312-24 THREADS OPTIONAL.

9. MATERIALS:

SCREW - CRES 316 PER QQ-S-763 COND. A OR 17-4PH PER AMS5643 COND. H1025.

WASHER - NYLON 6/6 PER L-P-410.

(F) KNOB - CRES 316 PER QQ-S-763 COND. A OR ALUMINUM ALLOY 2024 T4 PER QQ-A-255/6 OR ALUMINUM ALLOY 2024 T3511 PER QQ-A-200/3, OR PM PMA SS 316L-R AND PASSIVATED PER QQ-P-35.

WASHER STOP - CRES 301 OR 302 PER MIL-S-5059.

(F) LOCKING COLLAR - CRES 316 OR 304 PER QQ-S-763 COND. A. OPTIONAL MATERIAL: CRES 15-5PH PER AMS 5357, COND. H1000, HARDNESS ROCKWELL C33-39, OR PM PMA SS 316L-R AND PASSIVATED PER QQ-P-35.

(F) HOOK - 4130 STEEL PER MIL-S-18729, HEAT TREAT IN ACCORDANCE WITH MIL-H-6875 HARDNESS ROCKWELL C41-44. CORROSION RESISTANT STEEL IN ACCORDANCE WITH QQ-S-763, CLASS 410, COND. T OR 17-7PH COND. RH 1000 PER AMS2759.

SPACER STOP - CRES 303 PER ASTM A582.

HINGE - ALLOY STEEL 4140 STEEL PER MIL-S-5626, HEAT TREAT IN ACCORDANCE WITH MIL-H-6875 HARDNESS ROCKWELL C39-43. CORROSION RESISTANT STEEL 17-4PH PER AMS5643 COND. H1025.

APPROVED 25 JUNE 1971 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 6

USER SYMBOLS:
ARMY - AV, AT

REVIEWER SYMBOLS:
ARMY - AR
USAF - 85
DLA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY — AS Other Cust ARMY - ER USAF - 11	TITLE: FASTENER, POSITIVE SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT	MILITARY STANDARD MS 14108
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 5 OF 6

Source: https://assist.dla.mil -- Downloaded: 20261O-23T13:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (CONTINUED)

(F) 10. FINISH. ALL CRES COMPONENTS - PASSIVATE PER QQ-P-35.
ALUMINUM COMPONENTS - ANODIZE PER MIL-A-8625, TYPE II, CLASS 1 OR TYPE III, CLASS 1.
ALLOY STEEL - CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2. BAKE WITHIN 2 HOURS AFTER PLATING FOR 23 HOURS AT 375°F.

(F) LUBRICANT: DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-L-8937.

11. ALLOY STEEL PARTS SHALL BE MAGNETIC PARTICLE INSPECTED PER MIL-STD-1949

12. CORROSION RESISTANT STEEL PARTS SHALL BE FLUORESCENT PENETRANT INSPECTED PER MIL-STD-6866. POWDERED METAL PARTS ARE EXEMPT FROM THIS INSPECTION.

(F) 13. WHEN SPECIAL HOOKS ARE REQUIRED TO MEET DESIGN REQUIREMENTS, THE TIP CONFIGURATION SHALL BE PER MS14103-11.

(F) 14. THE MANUFACTURER SHALL FURNISH A CERTIFIED TEST REPORT SHOWING THAT THE MANUFACTURER'S PRODUCT SATISFACTORILY CONFORMS TO THIS STANDARD.

NOTES:

1. REMOVE BURRS, SLIVERS AND BREAK SHARP EDGES.

2. DIMENSIONS ARE IN INCHES.

3. UNLESS OTHERWISE SPECIFIED, TOLERANCES: 2 PLACE DECIMAL ± .03, 3 PLACE DECIMAL ± .010.

4. MIL IDENTIFICATION (MS14108-__) AND OTHER MARKING SHALL BE PERMANENT. METHOD OF APPLICATION IS OPTIONAL, AS LONG AS THE IDENTIFICATION IS NOT DESTROYED THROUGH NORMAL USE. MANUFACTURER'S NAME AND PART NUMBER MAY APPEAR ELSEWHERE ON THE ITEM SUPPLIED.

5. SUFFIX "A" - FOLLOWING DASH NUMBER (-5 THRU -10) DESIGNATES SPACER STOP FEATURE.
SUFFIX "ACP" - FOLLOWING DASH NUMBER (-5 THRU -10) DESIGNATES SELF POSITIONING AND STOP FEATURE.
SUFFIX "CP" - FOLLOWING DASH NUMBER (-5 THRU -10) DESIGNATES SELF POSITIONING FEATURE.
SUFFIX "C" - FOLLOWING DASH NUMBER (-11 THRU -22) DESIGNATES CORROSION RESISTANT STEEL MATERIAL.

6. EXAMPLE PART NUMBER:

MS14108-5A
└——— STOP FEATURE

MS14108-15C
└——— CORROSION RESISTANT STEEL MATERIAL

7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(F) 9. THE .09 INCH DIAMETER SURFACE HOLES DO NOT AFFECT THE FUNCTION OF THE PART, AND THE NUMBER OF HOLES MAY VARY FROM THE DESIGNATED SIX (6).

APPROVED 25 JUNE 1971 REVISED (F) FOR CHANGES SEE SHEETS 1 THRU 6

USER SYMBOLS: ARMY - AV, AT

REVIEWER SYMBOLS: ARMY - AR, USAF - 85, DLA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY — AS Other Cust	TITLE: FASTENER, PLASTIC SELF-LOCKING, CLOSE TOLERANCE, ELECTRONIC EQUIPMENT	MILITARY STANDARD MS 14108
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET OF

DD FORM MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO 22005

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.