
FED SUP CLASS
5935

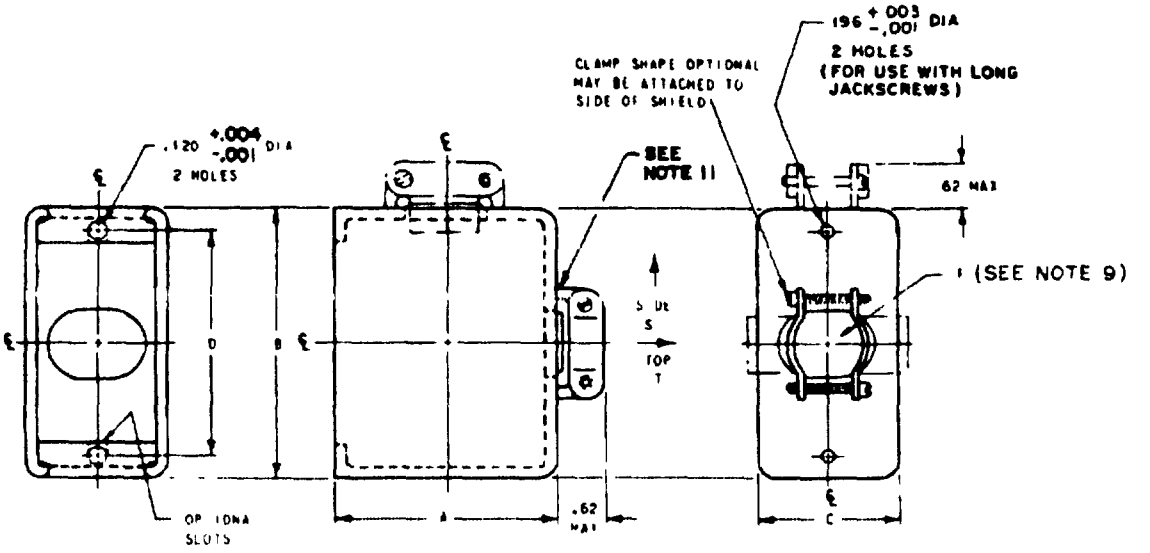

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.135	3.43	.938	23.83
.003	.08	18	4.6	1.000	25.40
.005	13	.19	4.8	1 18	30 0
010	25	196	4.98	1.220	30 99
016	.41	.22	5.6	1.250	31.75
.10	2.5	.437	11.10	1.312	33.32
.118	3.00	.500	12.70	1.35	34.3
120	3.05	.62	15.7	1.562	39.67
.122	3.10	.640	16.26	1.625	41.28
.125	3.18	.906	23.01		

MS PART NO.	CONNECTOR SIZE (NO OF CONTACTS)	A MIN MAX	B ±0.016	C ±0 016	D ±0 010	F MIN CABLE OPENING SQ INCH
MS18192-T1 MS18192-S1	14	1 18 1 35	1.250	0 500	0 938	0.19
MS18192-T2 MS18192-S2	20	1 18 1 35	1.562	0 500	1 250	0.22
MS18192-T7 MS18192-S7	7	1.18 1.35	1.220	0.437	0.906	0.18
MS18192-T8 MS18192-S8	9	1.18 1.35	1.312	0.437	1.000	0.10
MS18192-T9 MS18192-S9	26	1.18 1.35	1.625	0.640	1 312	0.22

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS.

(F) denotes changes

APPROVED 20 DEC 65 REVISED (C) 11 APR 1974 (D) 1 JUN 76 (E) 1 JAN 1979 (F) 1 JUNE 1983

User activities: Army ME, AM, AR Navy MC, OS, SH Air Force

Reviewer activities: Army MI, AT Navy AS Air Force 11,99 DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P A Navy-EC Other Cust AF-85 ARMY - LR	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, 50 AND 75 CONTACT CONNECTORS	MILITARY STANDARD MS 18192
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 4

DD FORM 1 SEP 83 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935- 3312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

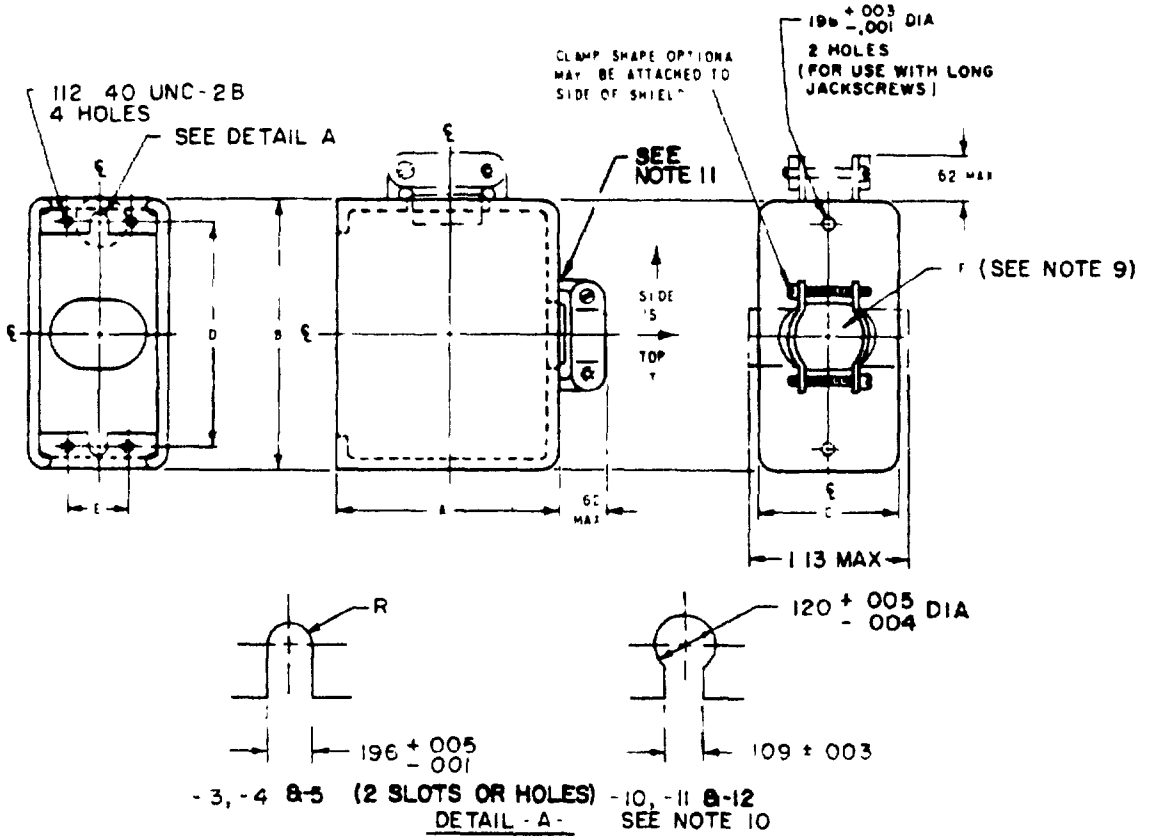

MS PART NO	CONNECTOR SIZE (NO OF CONTACTS)	A MIN MAX	B ± 016	C ± 016	D ± 005	E ± 010	F MIN CABLE OPENING SQ INCH
MS18192-T3 MS18192-S3	34	1 22 1 35	2 000	828	1 688	468	34
MS18192-T4 MS18192-S4	42	1 22 1 35	2 312	828	2 000	468	34
MS18192-T5 MS18192-S5	50	1 22 1 35	2 594	828	2 282	468	34
MS18192-T10 MS18192-S10	34	1 22 1 35	2 000	828	1 688	468	34
MS18192-T11 MS18192-S11	42	1 22 1 35	2 312	828	2 000	468	34
MS18192-T12 MS18192-S12	50	1 22 1 55	2 594	828	2 282	468	34

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS

FOR CHANGES SEE SHEET 3
REVISED
APPROVED 20 Dec 65

P A Navy-EC Other Cust AF-85 ARMY - CR	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, 50 AND 75 CONTACT CONNECTORS	MILITARY STANDARD MS 18192
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 4

DD FORM 1 SEP 63 672 (Cancelled) 5935-3312


User activities: Army ME, AM, AR; Navy MC, OS, SH; Air Force
Reviewer activities: Army MI, AT; Navy AS; Air Force 11, 99; DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

Ⓕ LOCATION OF HOLES FOR -XX AND YY SHIELDS TO BE USED WITH MS18259, 18253, MS18188 INSERTS

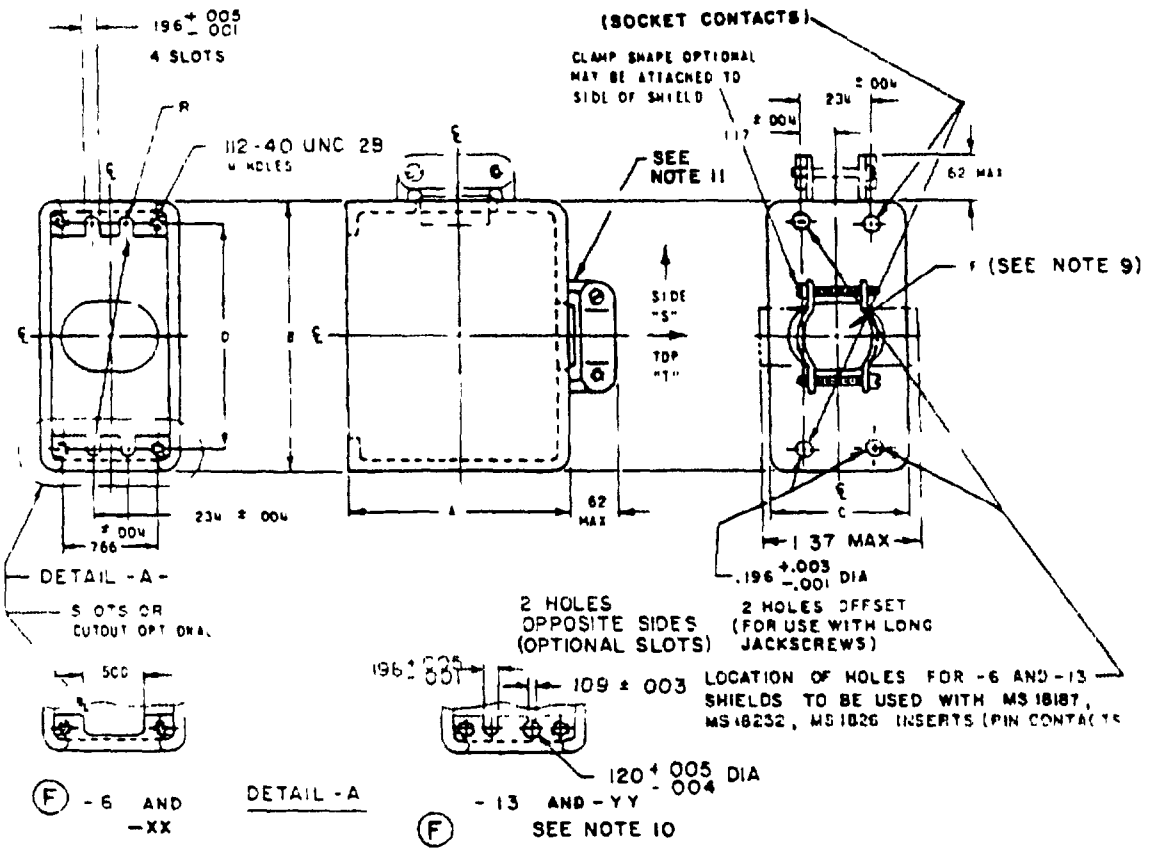

MS PART NO.	CONNECTOR SIZE (NO. OF CONTACTS)	A MIN MAX	B ±.016	C ±.016	D ±.010	F MIN CABLE OPENING SQ INCH
MS18192-T6 MS18192-S6	75 Pin only (see note 12)	1.22 1.35	2.594	1.188	2 282	0.55
MS18192-T13 MS18192-S13	75 Pin only (see note 12)	1.22 1.35	2.594	1.188	2.282	0 55
MS18192-TXX MS18192-SXX	75 Socket only (see note 12)	1.22 1.35	2 594	1.188	2.282	0.55
MS18192-TYY MS18192-SYY	75 Socket only (see note 12)	1 22 1.35	2 594	1 188	2 282	0.55

Ⓕ FOR CHANGES SEE SHEET 3*

APPROVED 20 DEC 65 REVISED

Review activities: Army ME, AM, AR Navy MC, OS, SH Air Force

User activities: Army MI, AT Navy AS Air Force 11, 99 DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A Navy-EC Other Cust AF-85 ARMY - CR	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, 50 and 75 CONTACT CONNECTORS	MILITARY STANDARD MS 18192
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 4

DD FORM 1 SEP 83 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army ME, AM, AR
Navy MC, OS, SH
Air Force

Reviewer activities Army MI, AT
Navy AS
Air Force 11, 99
DLA - ES

FED SUP CLASS
5935

INCHES	MM	INCHES	MM	INCHES	MM
001	.03	.196	4.98	1.13	28.7
.003	.08	.234	5.94	1.188	29.18
.004	.10	.26	6.6	1.22	31.0
.005	.13	.34	8.6	1.35	34.3
010	.25	468	11 89	1.688	42 88
.016	41	.500	12.70	2.000	50.80
109	2.77	.55	14.0	2.282	57.96
112	2.84	.62	15.7	2.312	58.72
.117	2.97	.766	19.46	2.594	65.89
.120	3 05	.828	21.03		

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .016 (41 mm).
3. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
4. For shield with top cable opening suffix part No with 'T' For shield with side cable opening suffix part No with 'S'
5. Material. Aluminum alloy, per specification QQ-A-250/8, temper H32, 040 (1 02 mm) thick
6. Finish Anodize per specification MIL-A-8625, type I or type II.
7. Referenced documents shall be of the issue in effect on date of invitation for bid
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein
9. Edges of cable entry hole to be rounded to prevent insulation chafing.
10. T10, S10, T11, S11, T12, T13, S13, TYY and SYY for use with one piece jackscrews.
11. Clamp hinge may attach to side of shield.
12. (F) Contact type and jackscrew orientation must be separated to guarantee intermateability

FOR CHANGES SEE SHEET 3

APPROVED 20 DEC 1965 REVISED

P A NAVY - EC Other Cust AF 85 ARMY - CR	International interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, 50 AND 75 CONTACT CONNECTORS	MILITARY STANDARD MS 18192
Procurement Specification MIL C 28748		SUPERSEDES	SHEET 4 or 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.