
FED. SUP. CLASS
6140

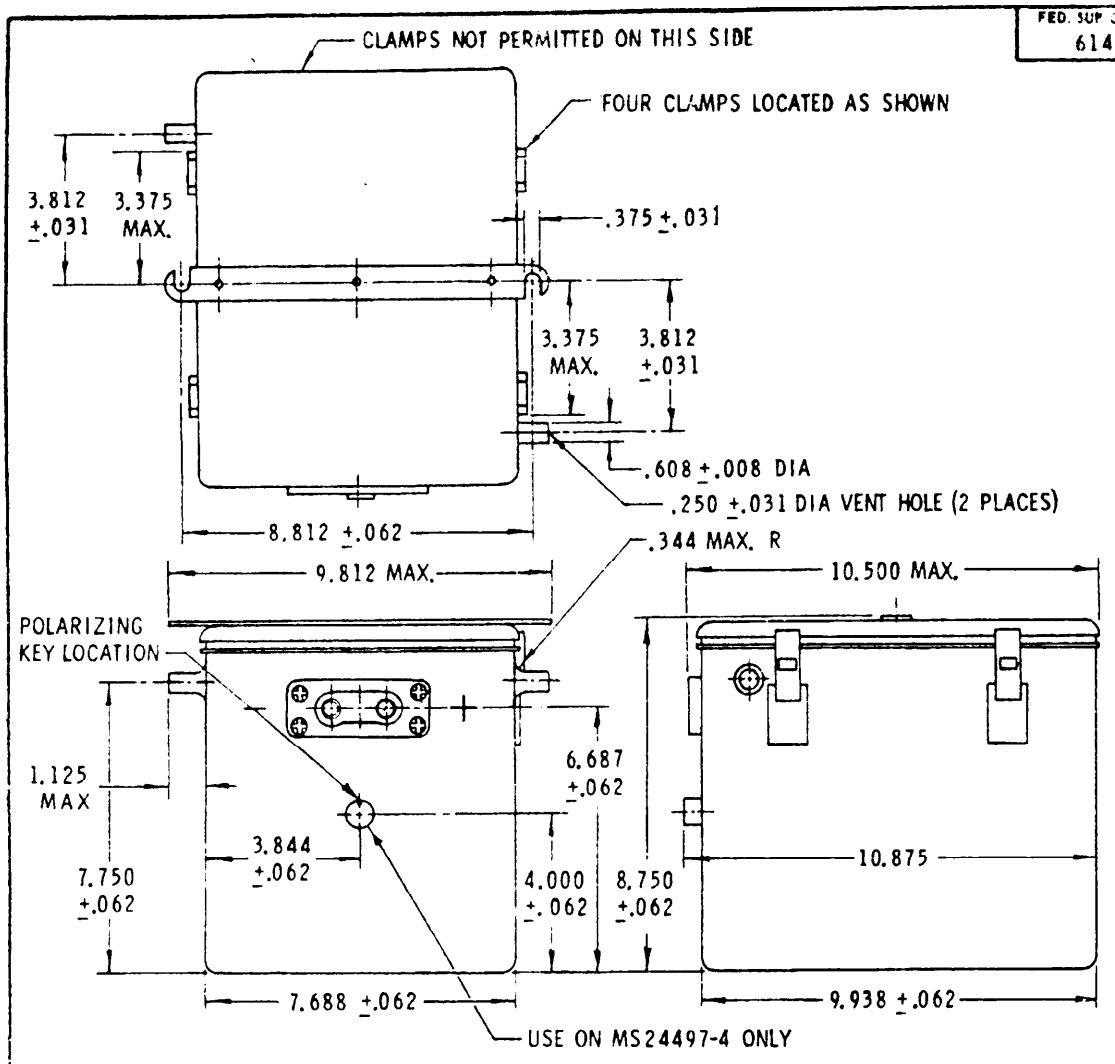

Heater receptacle to mate with CA3108E-14S-7S (F83)-(F84) Cannon Electric or equivalent.

CAPACITY RANGE

PART NO.	TIME RATE	CUT-OFF VOLTS	TEMPERATURE °C	DISCHARGE RATE AMPS	AMPERE HOUR
MS24497-3	2 HR	19.2	27	11	22
	1 HR	18.0	27	18.2	18.2
	5 MIN	14.4	27	150	12.5
	58 MIN	18.0	-40	15	14.5
	6 SEC	18.0	-40	75	0.125
	20 sec drain 3 times in 5 min period	10.0	-17.8 and 71	500	8.333
MS24497-4	Same as MS24497-5 with addition of heater and thermo switch.				
MS24497-5	2 HR	19.2	27	11	22
	1 HR	18.0	27	18.2	18.2
	5 MIN	14.4	27	150	12.5
	3 MIN	14.4	-30	150	7.5
	0-10 SEC		-12.2	800	10.6
	10-60 SEC	10		450	

(F)

REVISED (A) 13 APR 61 (B) 23 MAR 64 (C) 18 FEB 65 (D) 9 NOV 65 (E) 26 MAY 77 (F) 25 OCT 78

APPROVED 3 DEC 57

P A
Air Force-99
Other Cust

INTERNATIONAL INTEREST

TITLE
BATTERY, AIRCRAFT STORAGE, NICKEL-CADMIUM
24 VOLTS, 22 AMPERE HOUR, 27°C (80°F)

MILITARY STANDARD
MS 24497 (99)

PROCUREMENT SPECIFICATION
MIL-B-26220

SUPERSEDES:

SHEET 1 of 2

DD FORM 672-1 (LIMITED COORDINATION)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6140-F505

This military standard is approved for use by (Sacramento ALC MMIRE) Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS
6140

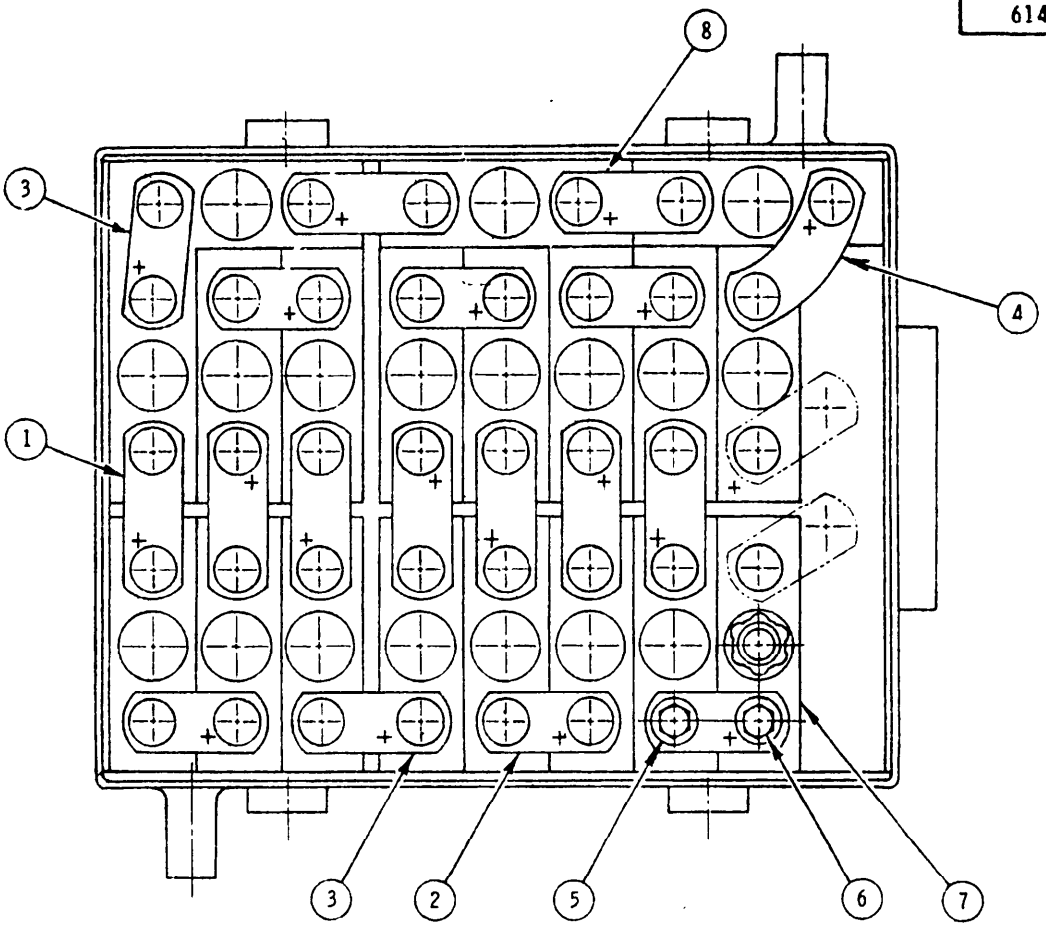

REF. NO.	NAME	QUANITY	PART NO.
1	CONNECTOR	8	MS27309-4
2	CONNECTOR	6	MS27309-7
3	CONNECTOR	2	MS27309-2
4	CONNECTOR	1	MS27310-2
5	BELLEVILLE SPRING	38	MS75044-1
6	BOLT	38	AN3C3A
7	CELL, BATTERY	19	MS27307 * (F)
8	CONNECTOR	1	MS27309-6

* See MS27307 for applicable dash number and symbol.

Notes:
1. The maximum weight of MS24497-3 and MS24497-5 battery filled with electrolyte shall be 55 pounds.
2. The maximum weight of MS24497-4 battery filled with electrolyte shall be 60 pounds.
3. Part no. MS24497-2 supperseded by MS24497-3.
4. Part no. MS24497-1 supperseded by MS24497-5.
5. Dimensions in inches.
6. Charging rate: Start 8 amps. Finish 2 amps.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.

Certain provisions of this document are the subject of International Standardization Agreement ABC 12/15. When amendment, revision, or cancellation of this document is proposed, the departmental custodian will inform their respective departmental standardization offices so that appropriate action may be taken respecting the international agreement concerned.

APPROVED 3 DEC 57 REVISED (F) see sheet 1 25 OCT 78

P. A. Air Force-99 Other Cust	INTERNATIONAL INTEREST	TITLE: BATTERY, AIRCRAFT STORAGE, NICKEL-CADMIUM 24 VOLTS, 22 AMPERE HOUR, 27°C (80°F)	MILITARY STANDARD MS 24497 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES:		SHEET 2 of 2

DD FORM 1 MAY 73 672-1 (LIMITED COORDIN.

6140-F505

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.