INCH-POUND

MS25205J
26 March 2024
SUPERSEDING
MS25205H
6 October 2014

MILITARY SPECIFICATION SHEET

FLASHER, SOLID STATE, AIRCRAFT LIGHT

Inactive for new design and is no longer used except for replacement purposes.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flasher described herein shall consist of this specification sheet and MIL-F-26301.

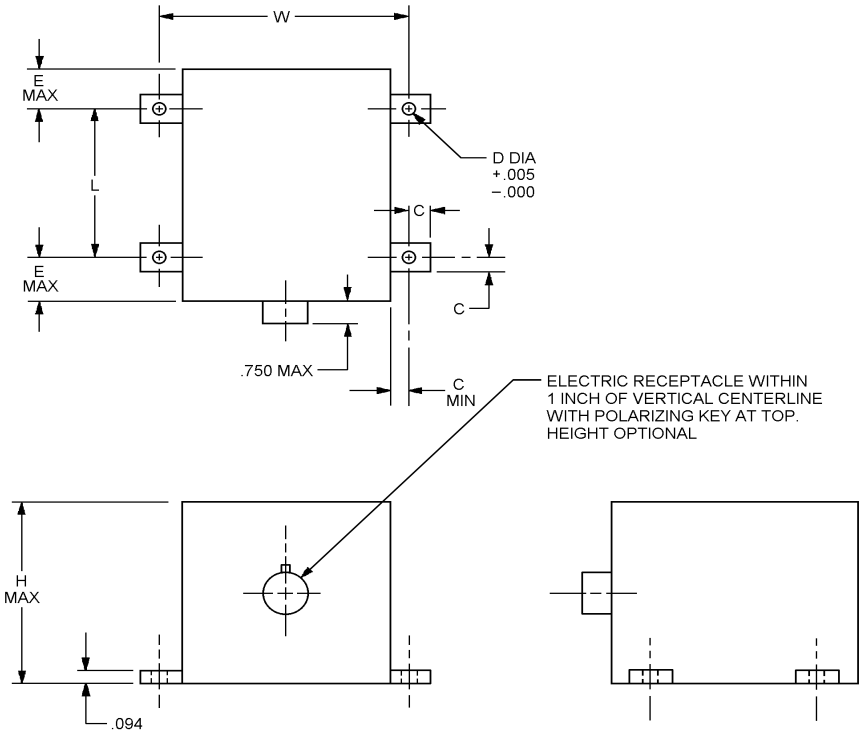


FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	1.125	28.58
.094	2.39	1.230	31.24
.175	4.45	1.500	38.10
.180	4.57	2.000	50.80
.188	4.78	2.230	56.64
.200	5.08	2.500	63.50
.218	5.54	2.562	65.07
.250	6.35	2.594	65.89
.260	6.60	2.640	67.06
.375	9.52	2.750	69.85
.380	9.65	2.940	74.68
.500	12.70	3.000	76.20
.562	14.27	3.120	79.25
.625	15.88	3.375	85.72
.688	17.48	3.500	88.90
.750	19.05	3.750	95.25
.870	22.10	4.000	101.60
.880	22.35	4.500	114.30
1.000	25.40	5.375	136.52

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is .010 (0.25 mm).
4. The flasher need not have the shape shown, but shall be contained within the outline shown.
5. Allowable voltage variation shall be in accordance with MIL-F-26301.
6. Allowable frequency variation is ±5.0 percent of rated frequency.
7. Flash rate shall be 90 ±10 flashes per minute.
8. The voltage drop within the flasher shall not exceed 5.0 percent of the input voltage for any value of load within the limits specified in MIL-F-26301.
9. MS25205-1, -3, -6, and -8 through -11 are canceled without replacement.
10. MS25205-2 is superseded by MS24577-4.
11. MS25205-4 is superseded by MS24577-2A.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

TABLE I Pin connections.

Dash no	L	W	H	D	C	E	Receptacle to mate with plug	Pin connections					Max wt., lbs.	Duration of life test hours
								A	B	C	D	E		
-1 (Note 9)	2.750	3.500	2.594	.200	.250	.562	SAE-AS31061-18-4S	Input 115 V ac 0.22 amp	Input 115 V ac or 28 V dc 7.5 amp	Output 115 V ac or 28 V dc 7.5 amp	Grounded internally	N/A	2.5	1,000
-2 (Note 10)	2.750	3.500	2.594	.200	.250	.562	SAE-AS31061-14-5S	Input 28 V dc 7.7 amp	Output 28 V dc 7.5 amp	Spare	Grounded internally	Spare	2.5	1,000
-3 (Note 9)	3.000	5.375	4.500	.260	.375	.688	SAE-AS31061-16S-8S	Spare	Input 28 V dc 5.2 amp	Output 28 V dc 5.0 amp	Output 28 V dc 5.0 amp	Grounded internally	4	300
-4 (Note 11)	2.000	2.500	2.594	.175	.250	1.125	SAE-AS31061-16S-8S	Spare	Input 28 V dc 5.2 amp	Output 28 V dc, 5.0 amp, pins internally connected		Grounded internally	1.5	800
-5	1.500	2.000	2.594	.175	.250	1.125	MS3116-8-4S	Spare	Input 28 V dc 1.2 amp	Output 28 V dc 1.0 amp	Grounded internally	N/A	.75	1,000
-6 (Note 9)	2.750	3.500	3.120	.200	.250	.562	MS3116-10-6S	Input 28 V ac or dc 15.3 amp	Output 28 V ac or dc 15.0 amp	Spare	Grounded internally	Spare	2.5	1,000
-7	2.000	2.750	2.230	.180	.380	.870	SAE-AS31061-16S-8S	Input 115 V ac 4.1 amp	Spare	Output 115 V ac 4.0 amp	Grounded internally	Spare	1.0	1,000
-8 (Note 9)	2.000	2.500	2.562	.188	.250	.880	SAE-AS31061-16S-8S	Spare	Input 115 V ac 2.1 amp	Output 115 V ac, 2.0 amp		Grounded internally	1.0	1,000
-9 (Note 9)	2.000	2.750	2.230	.180	.625	1.230	SAE-AS31061-16S-8S	Input 115 V ac 0.3 amp	Spare	Output 28 V ac 1.0 amp	Grounded internally	Output 6.0 V ac 4.0 amp	1.5	1,000
-10 (Note 9)	3.750	3.375	2.640	.218	.380	.625	SAE-AS31061-18-11S	Input 115 V ac 2.0 amp	Spare	Output 28 V ac 7.5 amp	Grounded internally	Output 6.0 V ac 34 amp	3.2	1,000
-11 (Note 9)	4.000	4.000	2.940	.218	.500	.500	SAE-AS31061-18-11S	Input 115 V ac 4.4 amp	Spare	Output 28 V ac 15 amp	Grounded internally	Spare	5.0	1,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

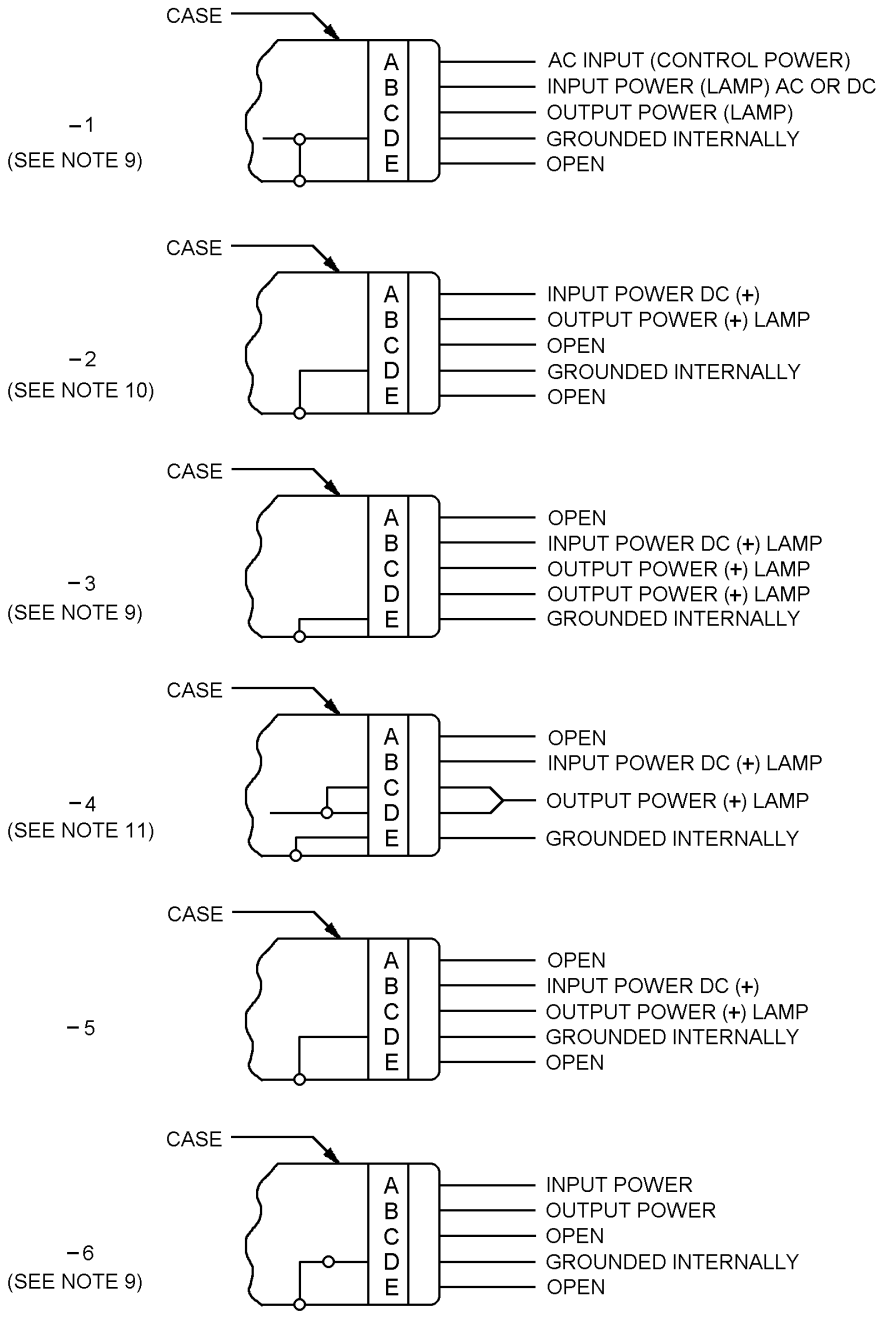


FIGURE 2. Dash number and pin connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

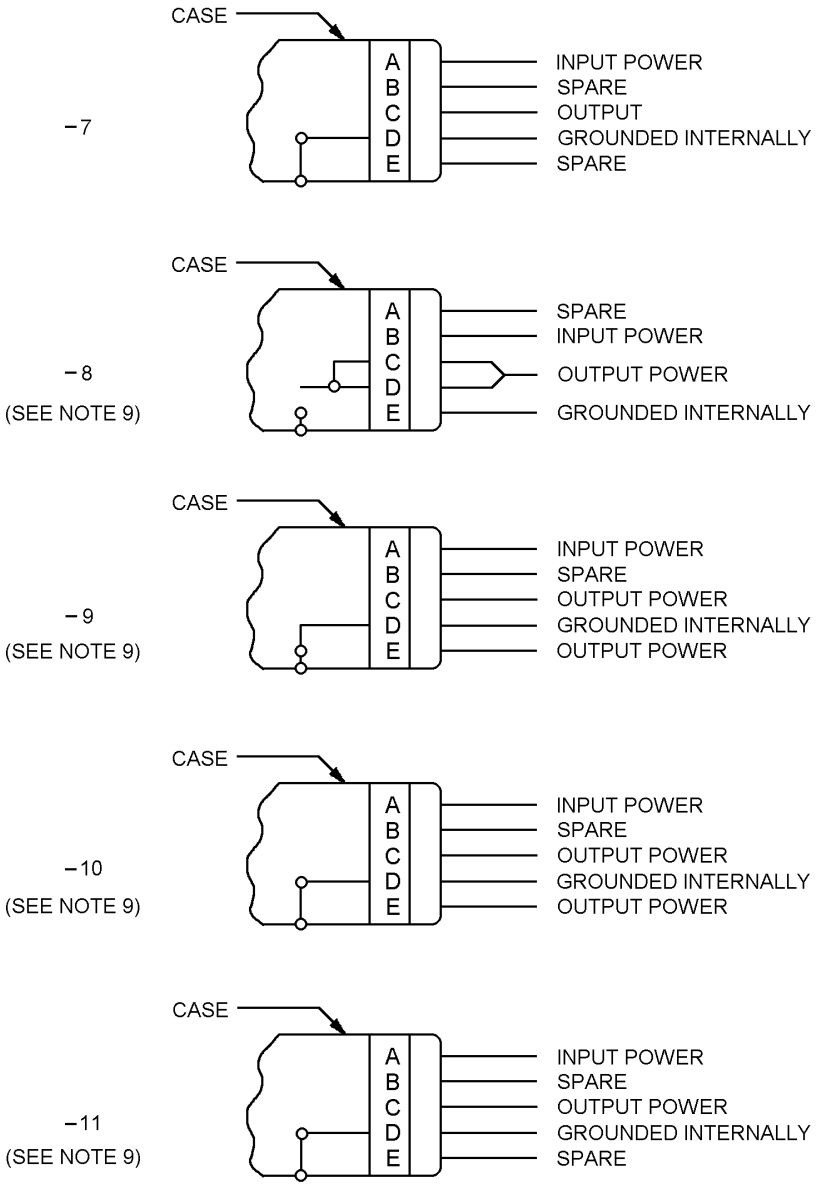


FIGURE 2. Dash number and pin connections- Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire contect irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-F-26301, this document references the following:
MS24577 MS3116 SAE-AS31061

Custodians:
Navy - AS
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2024-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.