AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

"Technical/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current [illegible]."

[illegible]
USAF - 11
DESC -[illegible]

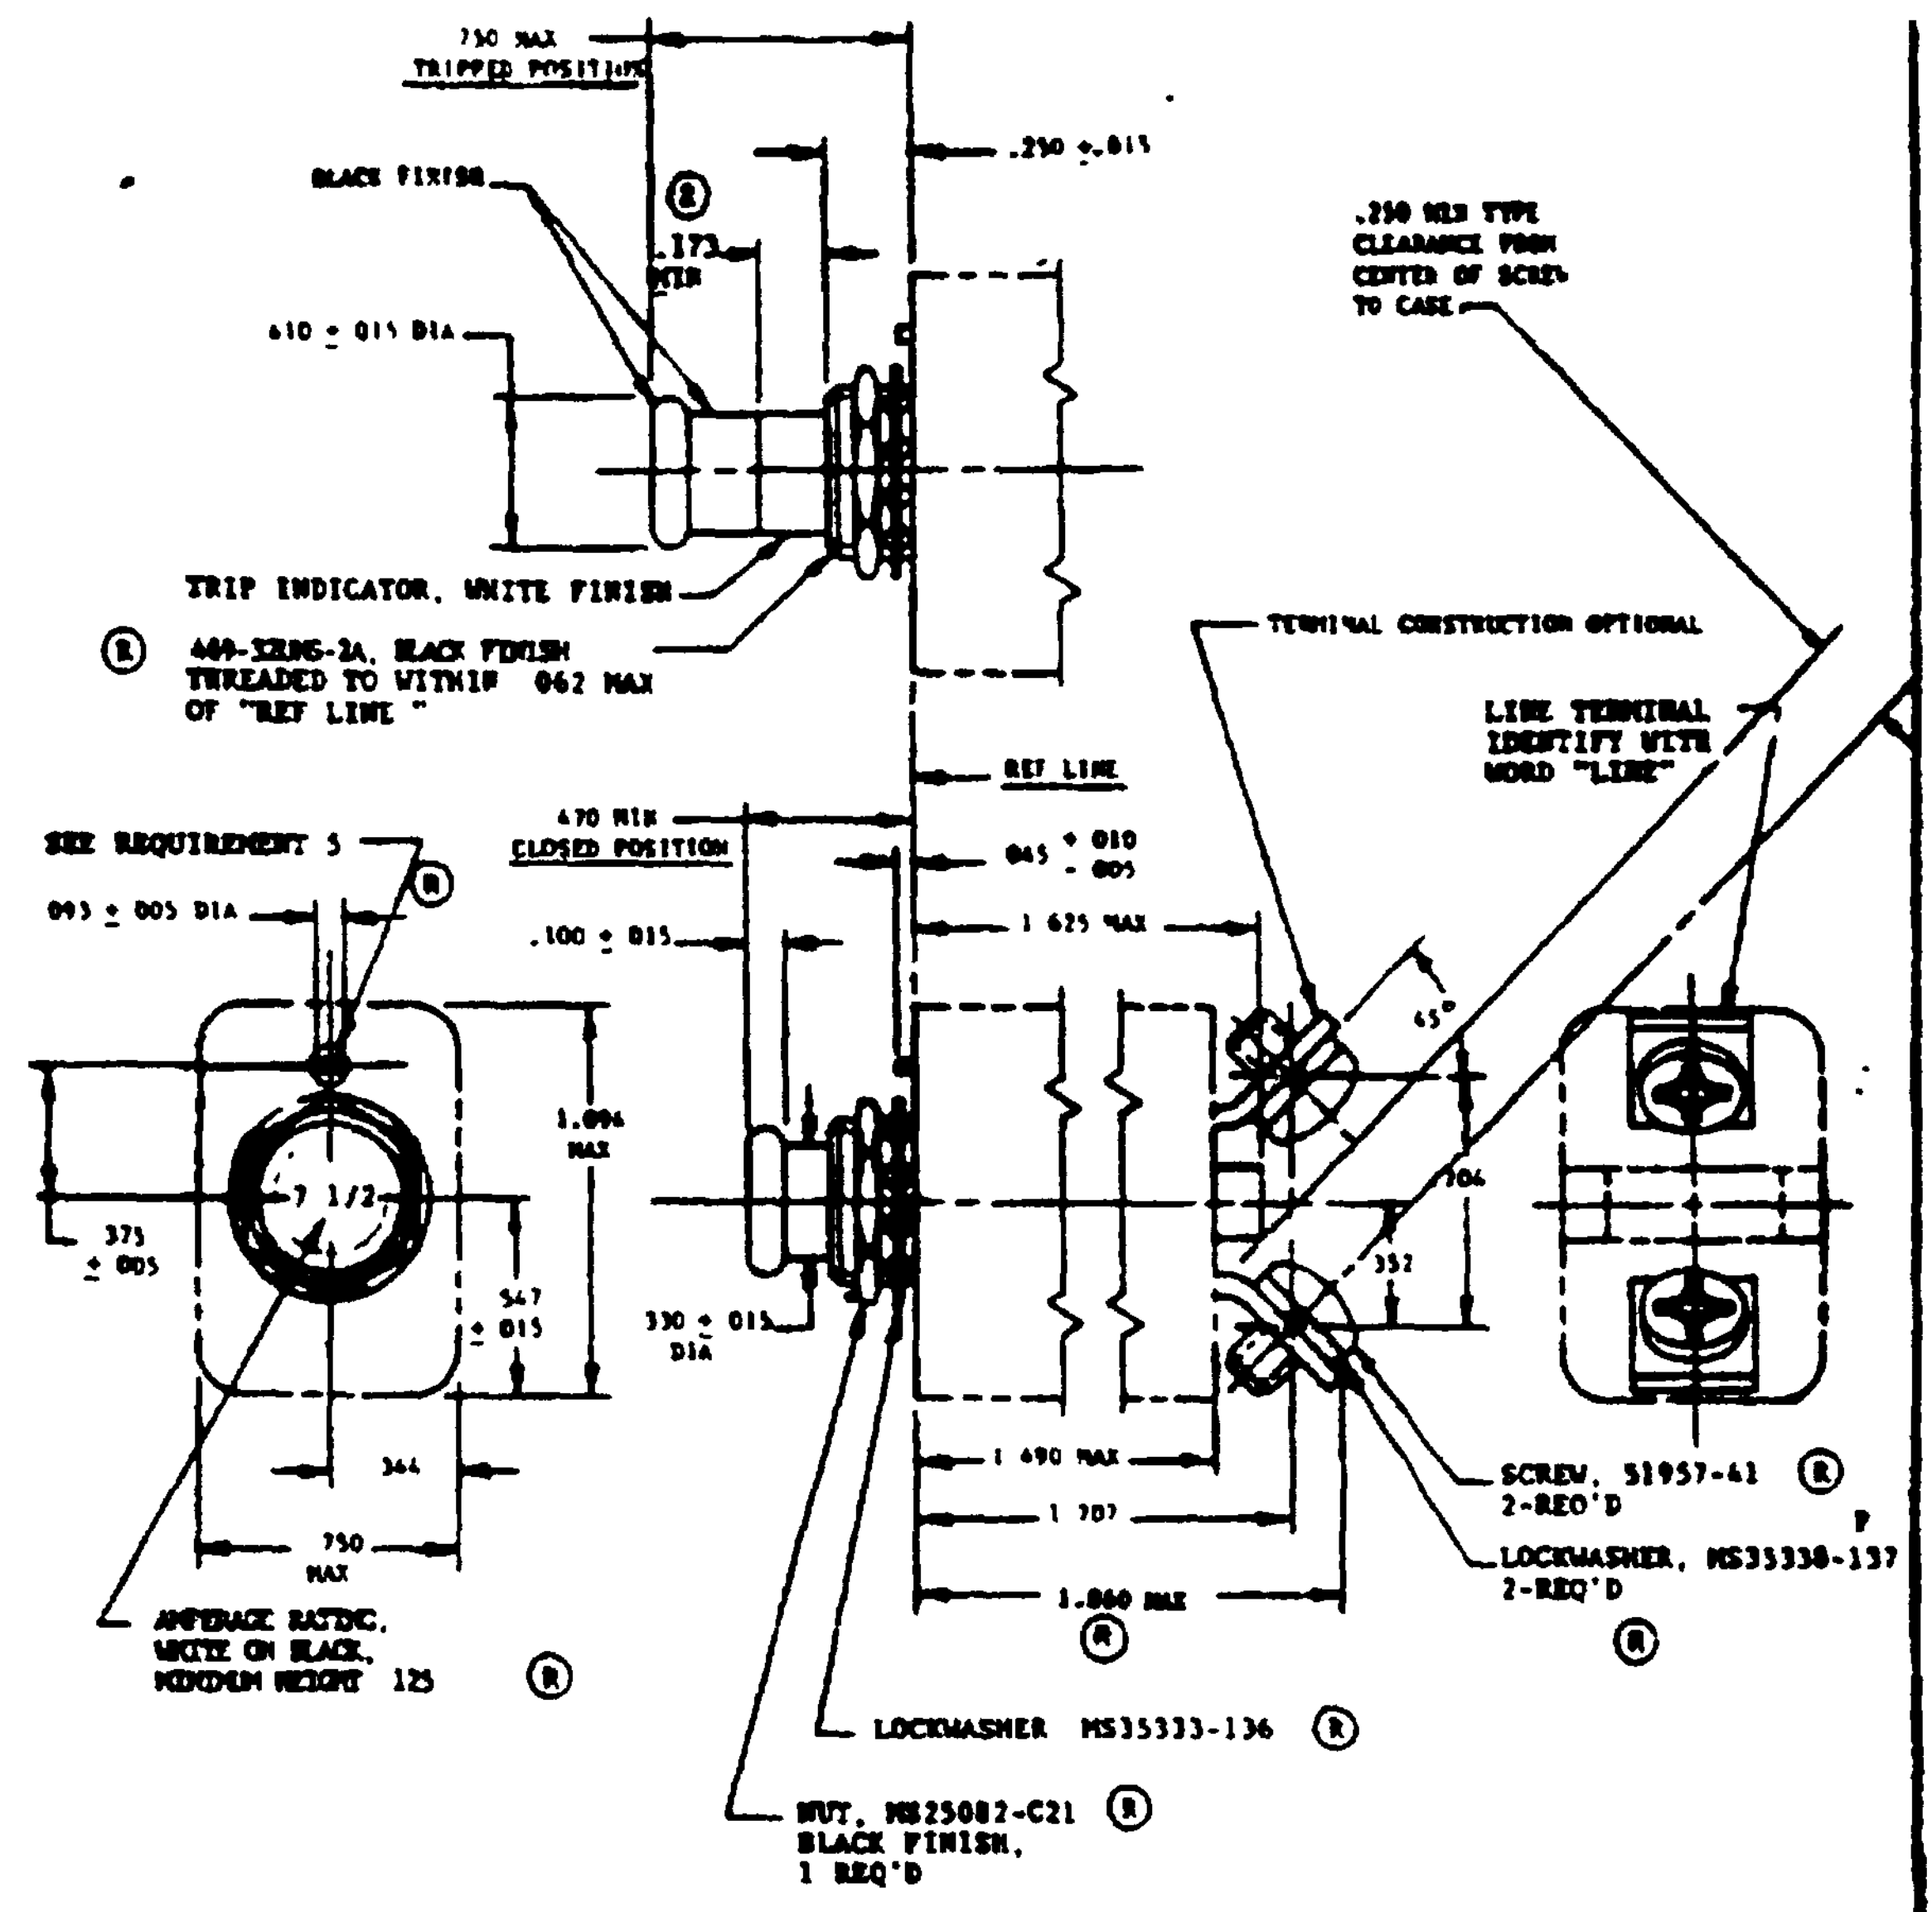
.750 MAX TRIPPED POSITION
.250 ± .015
BLACK FINISH
.173 MIN
.610 ± .015 DIA
.250 MIN TYPE CLEARANCE FROM CENTER OF SCREW TO CASE
TRIP INDICATOR, WHITE FINISH
440-32UNS-2A, BLACK FINISH THREADED TO WITHIN .062 MAX OF "REF LINE"
TERMINAL CONSTRUCTION OPTIONAL
LINE TERMINAL IDENTIFY WITH WORD "LINE"
REF LINE
SEE REQUIREMENT 5
.470 MIN CLOSED POSITION
.045 + .010 - .005
.093 ± .005 DIA
.100 ± .015
1.625 MAX
45°
1.094 MAX
7 1/2
.375 ± .005
.547 ± .015
.704
.352
.330 ± .015 DIA
.344
.750 MAX
1.490 MAX
1.707
1.860 MAX
SCREW, 51957-41 2-REQ'D
LOCKWASHER, MS35338-137 2-REQ'D
AMPERAGE RATING, WHITE ON BLACK, MINIMUM HEIGHT .125
LOCKWASHER MS35333-136
NUT, MS25082-C21 BLACK FINISH, 1 REQ'D
P

APPROVED 27 Aug 67 REVISED Ⓡ 30 NOV 1987

Ⓟ DENOTES CHANGES

P.A. NAVY - AS Other Cust USAF - 85 ARMY - ER	ALTERNATIVE ITEMS *	TITLE Ⓕ Circuit Breaker, Trip-Free, Push-Pull, 5 Thru 50 Amp, Type I	MILITARY STANDARD MS25244
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES MS25244(ASG), MS25017	SHEET 1 OF 5

DD FORM 1 APR 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5925-0175

TABLE I Ⓡ

ELECTRICAL AND MECHANICAL CHARACTERISTICS										
DASH NUMBER	NOMINAL CAPACITY (AMPERES)	VOLTAGE DROP MAX (V)	WEIGHT MAX (LBS)	OPERATING FORCE MAX (LBS)		ENDURANCE CYCLES				MECH NO LOAD
						RESISTIVE		INDUCTIVE		
				PULLOUT	RESET	AC	DC	AC	DC	
5	5	0 25	0 1	8	12	1/ 5 000	2/ 5,000	1/ 2,500 6 TO 7 LAGGING POWER FACTOR	2/ 2,500	5,000
7-1/2	7 5 (7-1/2)									
10	10									
15	15									
20	20									
25	25									
30	30									
35	35									
50	50									

1/ 400 CYCLES 115/200 VOLT SYSTEM, TESTED AT 120 ± 5 VOLTS 380-420 HZ
2/ 28 VOLTS DC, TESTED AT 30 ± 3 VOLTS

TABLE II Ⓡ

DETAIL CALIBRATION REQUIREMENTS - TRIP IN SECONDS												
NOMINAL CAPACITY (AMPERES)	+25°C					-60°C			+71°C			
	PERCENT RATED CURRENT					PERCENT RATED CURRENT			PERCENT RATED CURRENT			
	115	138	200	400	600	148	156	178	60	70	108	116
5	MUST HOLD - 1 HOUR MIN.	MUST TRIP - 1 HOUR MAX.	15 TO 55	2 TO 7	1.0 TO 3 5	(*)	MUST HOLD - 1 HOUR MIN.	MUST TRIP - 1 HOUR MAX	MUST HOLD - 1 HOUR MIN.	(*)	MUST TRIP - 1 HOUR MAX.	(*)
7 5 (7½)												
10						MUST HOLD - 1 HOUR MIN	(*)		(*)	MUST HOLD - 1 HOUR MIN	(*)	MUST TRIP - 1 HOUR MAX.
15												
20												
25												
30												
35												
50												

(a) TEMPERATURE TOLERANCE ±2°C
(*) NOT APPLICABLE

27 APR 1967 Ⓡ FOR CHANGES SEE SHEET 1

USAF - 11
DESC - ES

"Custodian/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY — AS USAF - 85 ARMY - ER	INTERNATIONAL INTEREST (SEE NOTE) 4	Ⓡ Circuit Breaker, Trip-Free, Push-Pull, 5 Thru 50 Amp, Type I	MILITARY STANDARD **MS25244**
MIL-C-5809		MS25244(ASG), MS29017	2 5

DD 672-1

PROJECT NO 5925-0175

TABLE III ®

INTERRUPTION CURRENT (AMPERES) REQUIREMENTS						
NOMINAL CAPACITY (AMPERES)	TEST DESIGNATION PER MIL-C-5809					
	A	B	C	D	E	F
5	3,500	3,500	6,000	6,000	(a) 2,000 (b) 1,000 (c) 750	(a) 3,000 (b) 1,500 (c) 1,000
7 5 (7½)						
10						
15						
20						
25						
30						
35						
50						

TABLE IV ®

ENVIRONMENTAL PERFORMANCE	
MAXIMUM OPERATING ALTITUDE - FT	65,000
OPERATING AMBIENT TEMPERATURE RANGE	-40°C TO +71°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - REQUIRED RANDOM - (OPTIONAL)
SHOCK	30 G, MIL-STD-202, METHOD 213, TEST CONDITION J
ACCELERATION	10 G

REQUIREMENTS

1 THE PART NUMBERS FOR CIRCUIT BREAKERS IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW

```
MS25244 - P  05
   |      |  ||______________AMPERAGE RATING
   |      |  |_______RANDOM VIBRATION LEVEL  (OPTION)
   |      |_______MOUNTING AND/OR TERMINAL CONFIGURATION
   |___________________________BASIC PART NUMBER
```

2 CIRCUIT BREAKERS ARE NONRECYCLING AS DEFINED IN MIL-C-5809

3 MS25244-1 and MS25244-3 are cancelled No superseding standard.

4 MS25244-PT SUPERSEDES MS25017 AND MS25005 PART NUMBERS OF MS25244-PT ARE INACTIVE FOR NEW DESIGN

5 MS25244 CIRCUIT BREAKERS MAY BE SUPPLIED WITH A RECTANGULAR KEYTAB OF 093 ± 005" WIDTH AND 031 ± .005 HEIGHT

NOTES

1 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCE DECIMALS ± 031" ANGLES ±2°

2 PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED

3 CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC 12/3 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

4 FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

5 VOLTAGE RATING 28 VOLTS DC NOMINAL OR 115 VOLTS 400 HZ NOMINAL

USAF - 11
DESC - ES

FOR CHANGES SEE SHEET 1 ®

27 APR 1967

P.A. NAVY — AS USAF-85 ARMY-ER	INTERNATIONAL INTEREST (SEE NOTE 4)	TITLE Circuit Breaker, Trip-Free, Push-Pull, 5 Thru 50 Amp, Type I ®	MILITARY STANDARD **MS25244**
PROCUREMENT SPECIFICATION MIL-C 5809		SUPERSEDES MS25244(ASG), MS25017	SHEET 3 OF 5

FED SUP CLASS
5925

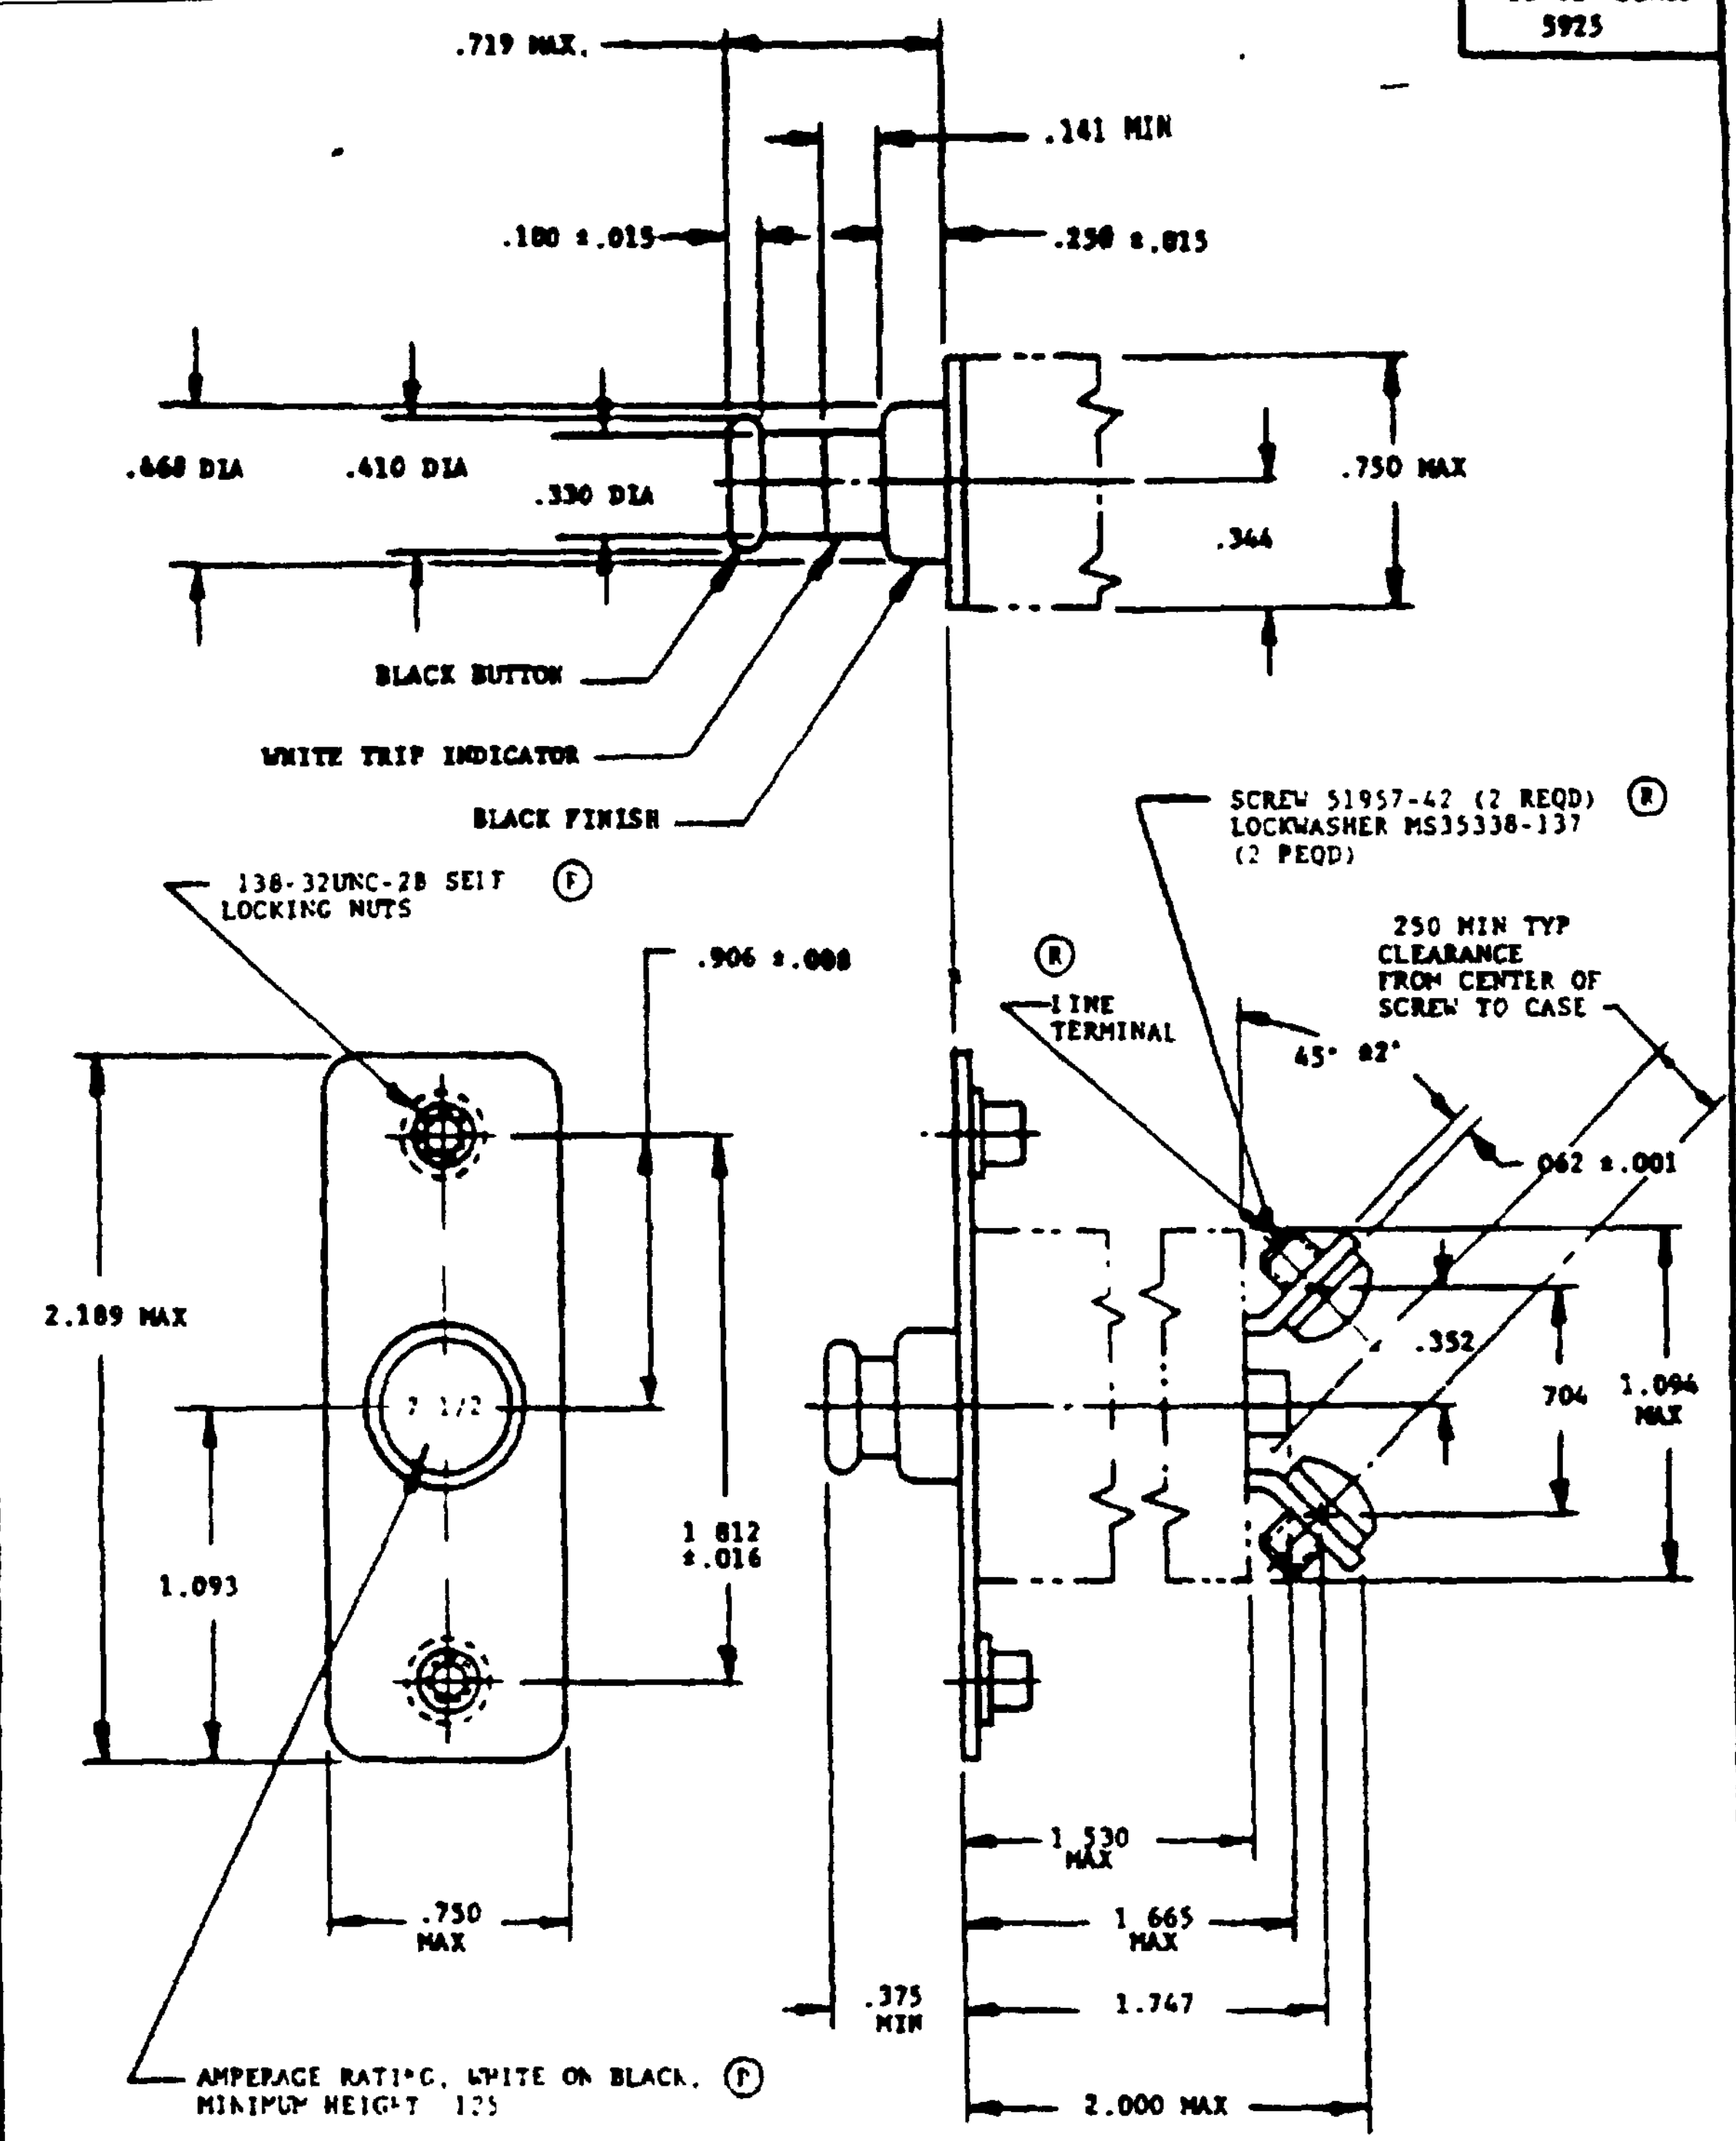

Ⓟ CIRCUIT BREAKERS SIMILAR TO THOSE ON SHEET 1 BUT MODIFIED WITH AN ADAPTER MOUNTING PLATE SHALL HAVE THE ABOVE OUTLINE AND CONFIGURATION AND SHALL BE DESIGNATED BY ADDING THE PREFIX LETTER P BEFORE THE AMPERAGE RATING CODE

Example MS25244-P10

APPROVED 27 APR 67 REVISED Ⓡ FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cust USAF - 85 ARMY - ER	INTER-NATIONAL INTEREST (SEE NOTE)	TITLE Ⓡ Circuit Breaker, Trip-Free, Push-Pull, 5 Thru 50 Amp, Type 1	MILITARY STANDARD MS25244
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES MS25244(ASG), MS25017	SHEET 4 OF 5

DD FORM 1 MAR 77 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO 23806

REVISION SYMBOLS
USAF - 11
DSAC - [illegible]

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

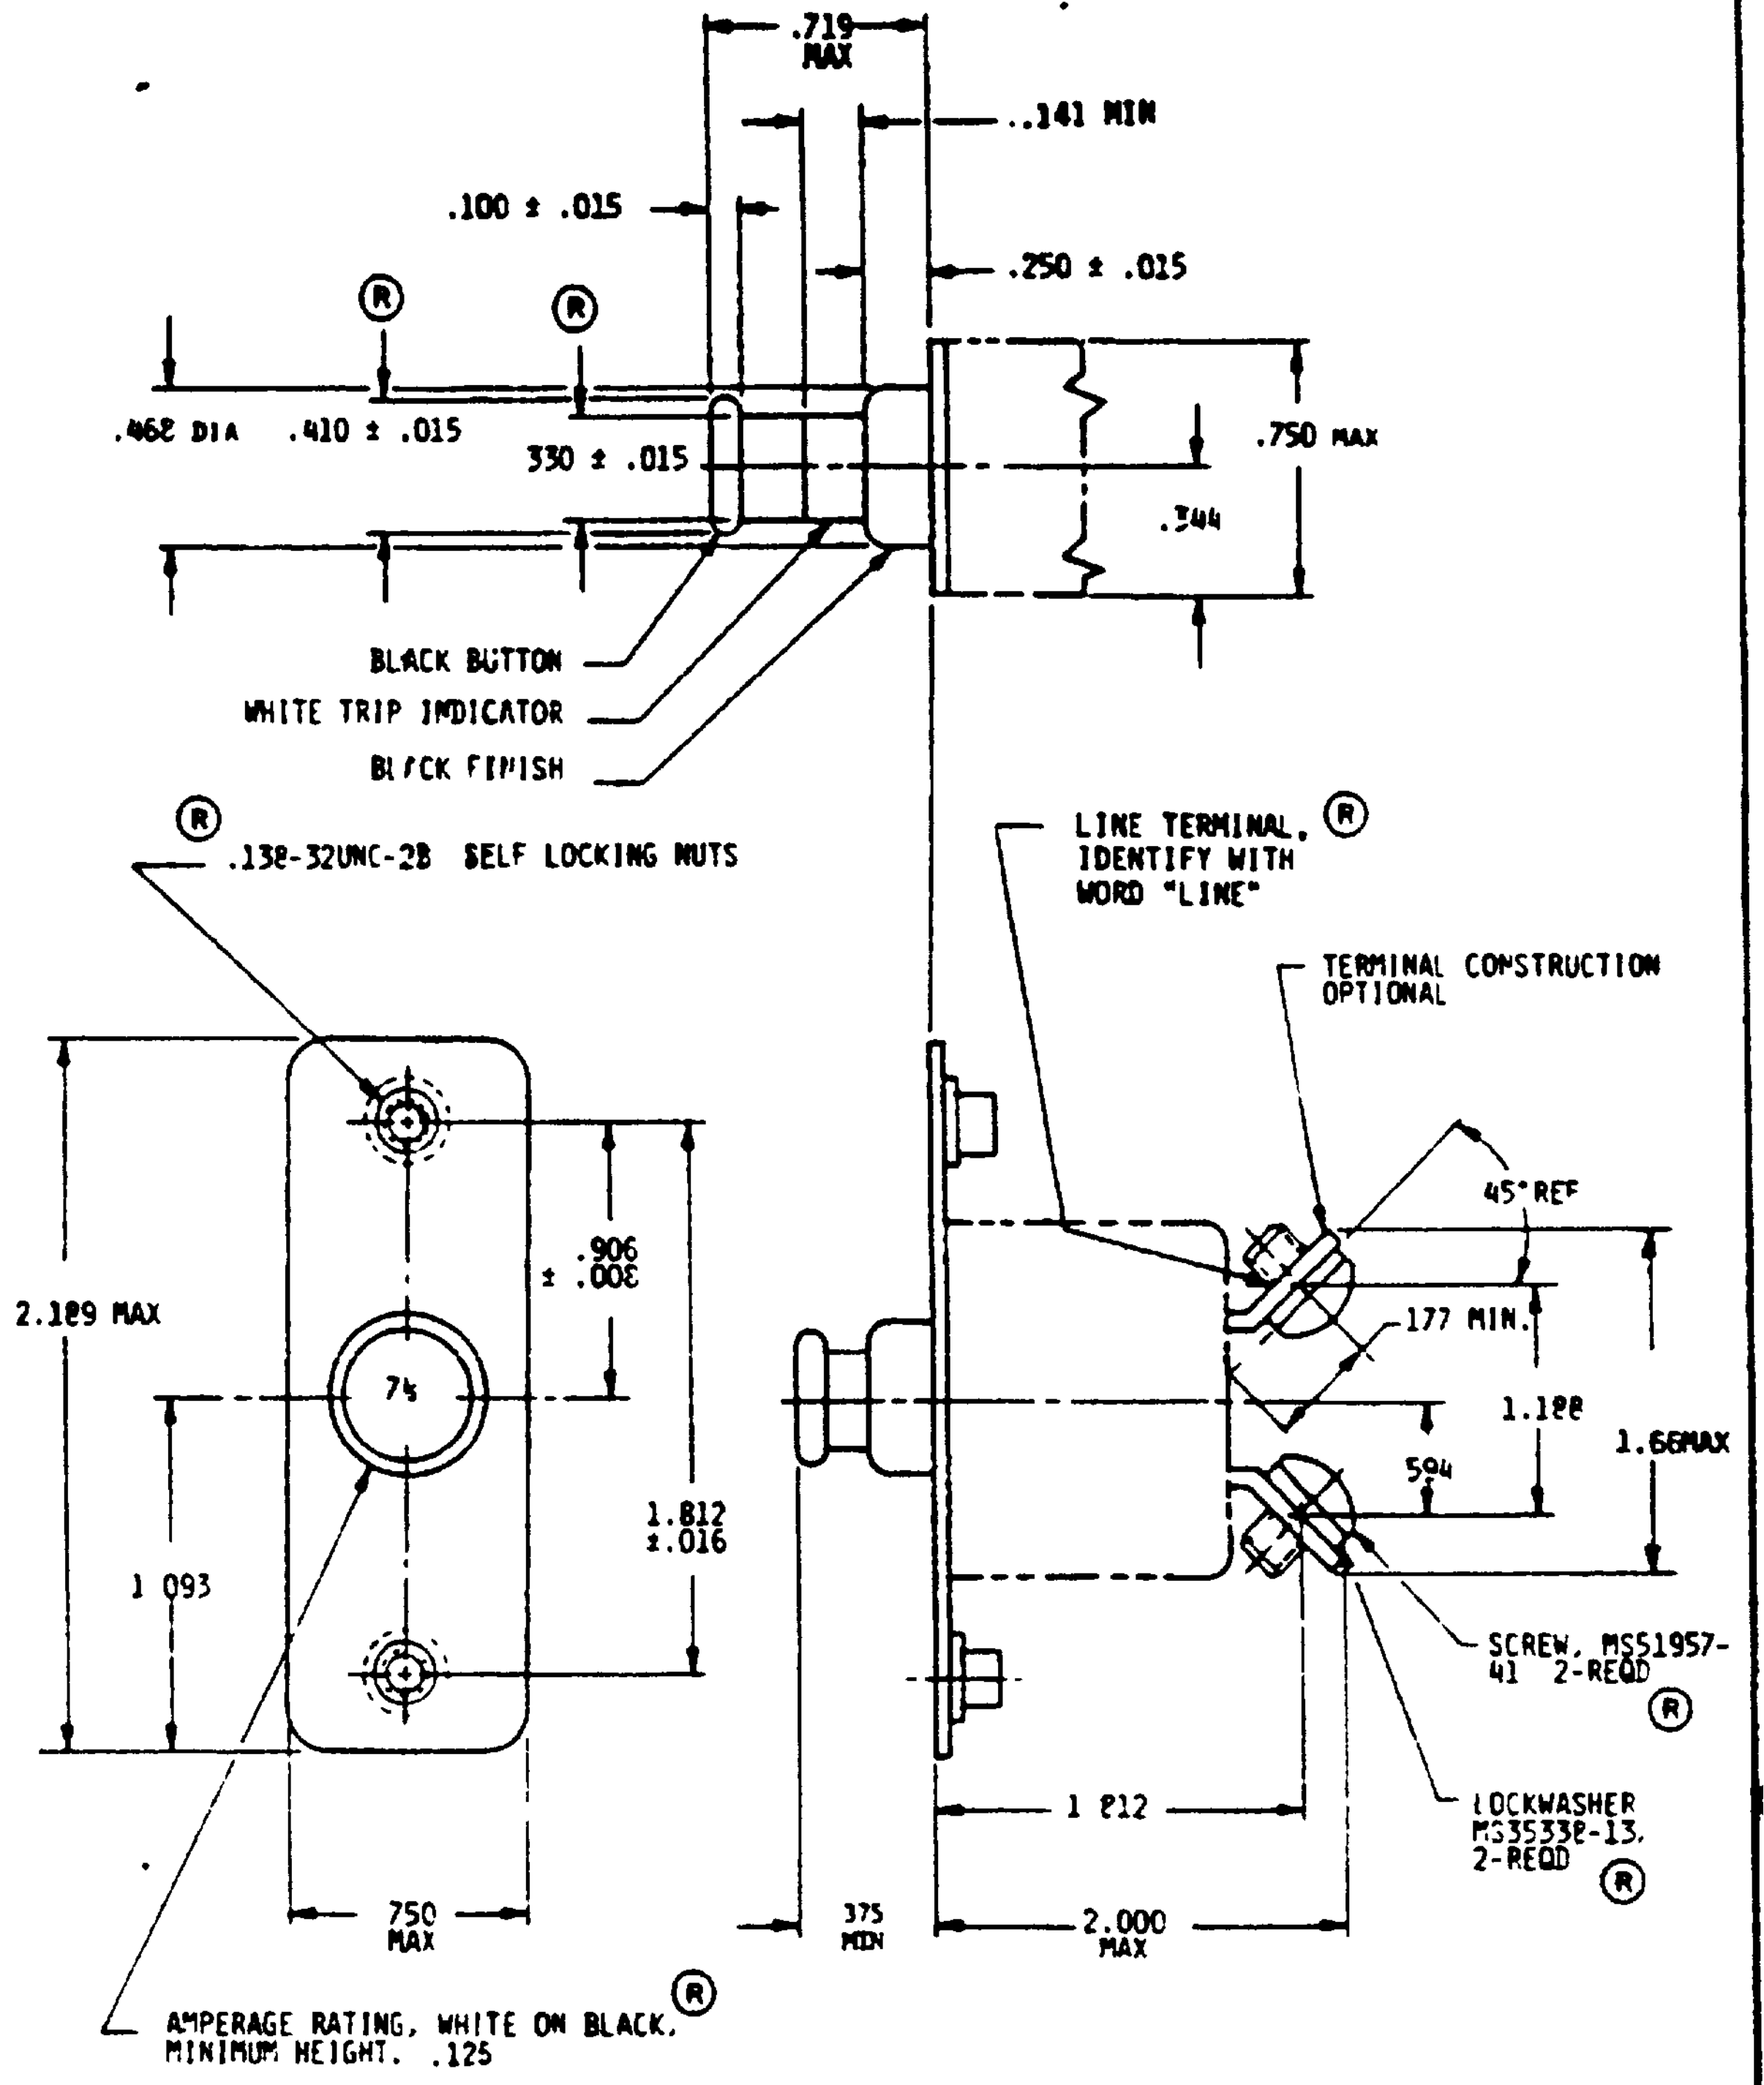

Ⓡ CIRCUIT BREAKERS SIMILAR TO THOSE ON SHEET 1, BUT MODIFIED WITH AN ADAPTER MOUNTING PLATE AND ALTERNATE TERMINAL CONFIGURATION SHALL HAVE THE ABOVE OUTLINE AND CONFIGURATION AND BE DESIGNATED BY ADDING THE PREFIX CODE "PT" BEFORE THE AMPERAGE RATING CODE

Example MS25244-PT10

P.A. NAVY — AS Other Cust USAF - ES ARMY - ER	INTERNATIONAL INTEREST (SEE NOTE 4)	TITLE Ⓡ Circuit Breaker, Trip-Free, Push-Pull, 5 Thru 50 Amp, Type I	MILITARY STANDAR MS 25244
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES: MS25244 (ASG), MS25017	SHEET 5 OF 5

USAF - 11
MESC - ES

Revision/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 672-1

MODIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.