INCH-POUND

MS25465H
25 November 2025
SUPERSEDING
MS25465G
08 October 2020


PERFORMANCE SPECIFICATION SHEET


RELAYS, ELECTROMAGNETIC, 5 AMPERES, 2 PDT, TYPE I, MAGNETIC LATCH, SOLDER TERMINALS, STUD MOUNTED, HERMETICALLY SEALED

INACTIVE FOR NEW DESIGN AFTER 5 JUN 1987.
NO SUPERSEDING SPECIFICATION.
(FOR NEW DESIGN USE MIL-PRF-6106/38)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

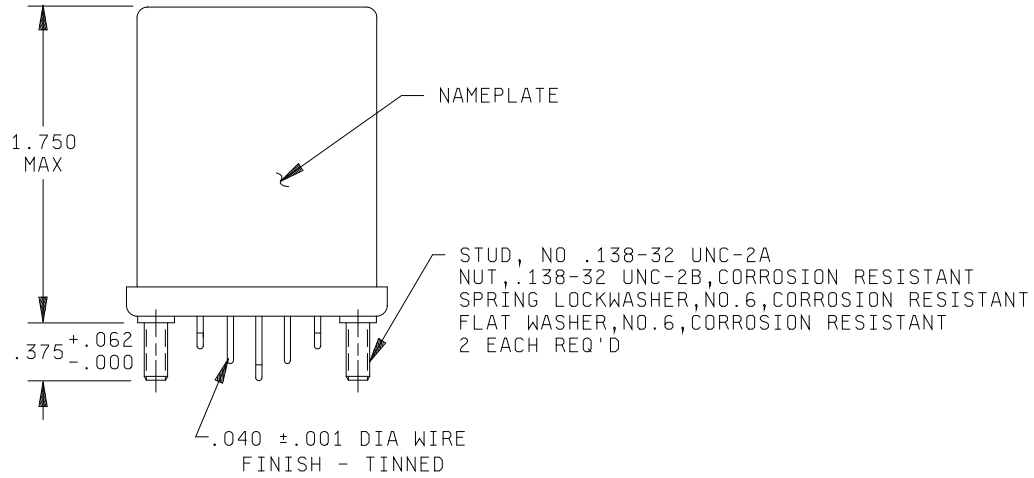


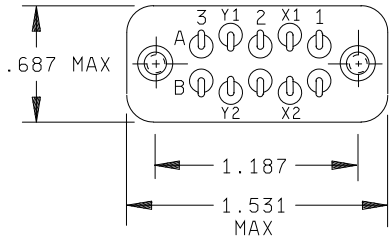

AMSC N/A
FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

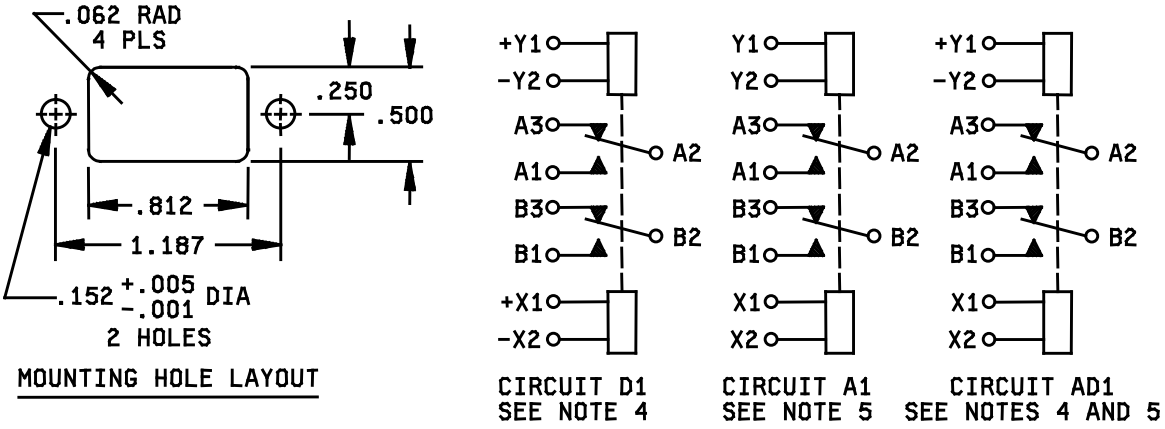

Inches	mm
.000	0.00
.001	0.03
.005	0.13
.040	1.02
.062	1.57
.152	3.86
.172	4.37
.250	6.35
.375	9.53
.500	12.70
.687	17.45
.843	21.41
1.187	30.15
1.531	38.89
1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified hereon.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. Relay is magnetically latched in both positions. Caution note to observe polarity must appear on relays with dc coils.
7. Shock, vibration, and acceleration requirements application with coils de-energized.
8. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
9. Referenced Government documents of the issue listed in that issue of the Acquisition Streamlining and Standardization Information System (ASSIST) specified in the solicitation forms a part of this standard to the extent specified herein.
10. Pins to be perpendicular to header surface within 1 degree.
11. Relay is magnetically latched in both positions. Caution note to observe polarity must appear on relays with dc coils.
12. Shock, vibration, and acceleration requirements application with coils de-energized.

FIGURE 1. Design, dimensions, and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number MS25465-	Type	Coil	Terminal type	Mounting means	Max weight in pounds
D1	I	dc	Solder hook	Stud	0.18
A1	I	ac	Solder hook	Stud	0.19
AD1	I	ac-dc	Solder hook	Stud	0.19

TABLE II. Operating characteristics.

PIN MS25465 -	Coil data											Time - milliseconds max				
	Coil	Rated			Max		Max pick-up voltage			Drop out voltage	Operate 3/	Release 4/	Contact Bounce			
													Main		Aux	
		Volts 1/	Freq Hz	Ω Res	Volts	Amp	Normal 2/	High temp test	Cont current test				NO	NC	NO	NC
D1	X1, X2 Y1, Y2	28	dc	N/A	29	0.12	18	18	19.8	N/A	25	N/A	2	2	N/A	N/A
A1	X1, X2 Y1, Y2	115	400 5/	N/A	122	0.06	90	90	95	N/A	25	N/A	2	2	N/A	N/A
AD1	X1, X2	115	400 5/	N/A	122	0.06	90	90	95	N/A	25	N/A	2	2	N/A	N/A
	Y1, Y2	28	dc	N/A	29	0.12	18	18	19.8	N/A	25	N/A	2	2	N/A	N/A

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With nominal coil voltage.
4/ From nominal coil voltage.
5/ MS25465-A1 and -AD1 may be used on 60 Hz if maximum ambient temperature is limited to +85°C (maximum coil current shall be 0.066 ampere).

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Mixed loads	Applicable per specification MIL-PRF-6106													

1/ Absence of value indicates relay is not rated for 3-phase application.
2/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Environmental characteristics:

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 g's
Duration	11 ms
Max duration contact opening	10 μs
Vibration – sinusoidal	
G-level	10 g's
Frequency range	5-1,500 Hz
Acceleration	15 g's

Electrical characteristics:

Insulation resistance, initial	100 megohms.
After life or environmental tests	50 megohms.

Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts		
All other points	1,000 V rms	1,000 V rms

Dielectric strength (altitude).

	(When mounted in mating socket) 80,000 ft
Coil to case	250 V rms
Aux contacts	
All other points	250 V rms

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	20 amperes
Rupture current	25 amperes
Duty rating	Continuous
RFI specification	MIL-STD-461

(Applicable to coil circuits of ac operated relays.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

Conformance inspection.

Performance of groups B and C tests are not applicable.

Group A acceptance reports shall be submitted to the preparing activity on a yearly basis in order to retain qualification for this military specification sheet.

Qualification by similarity: See MIL-PRF-6106.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:

MIL-STD-461

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2025-045)

Review activity:
Navy – EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.