FED. SUP CLASS
6605

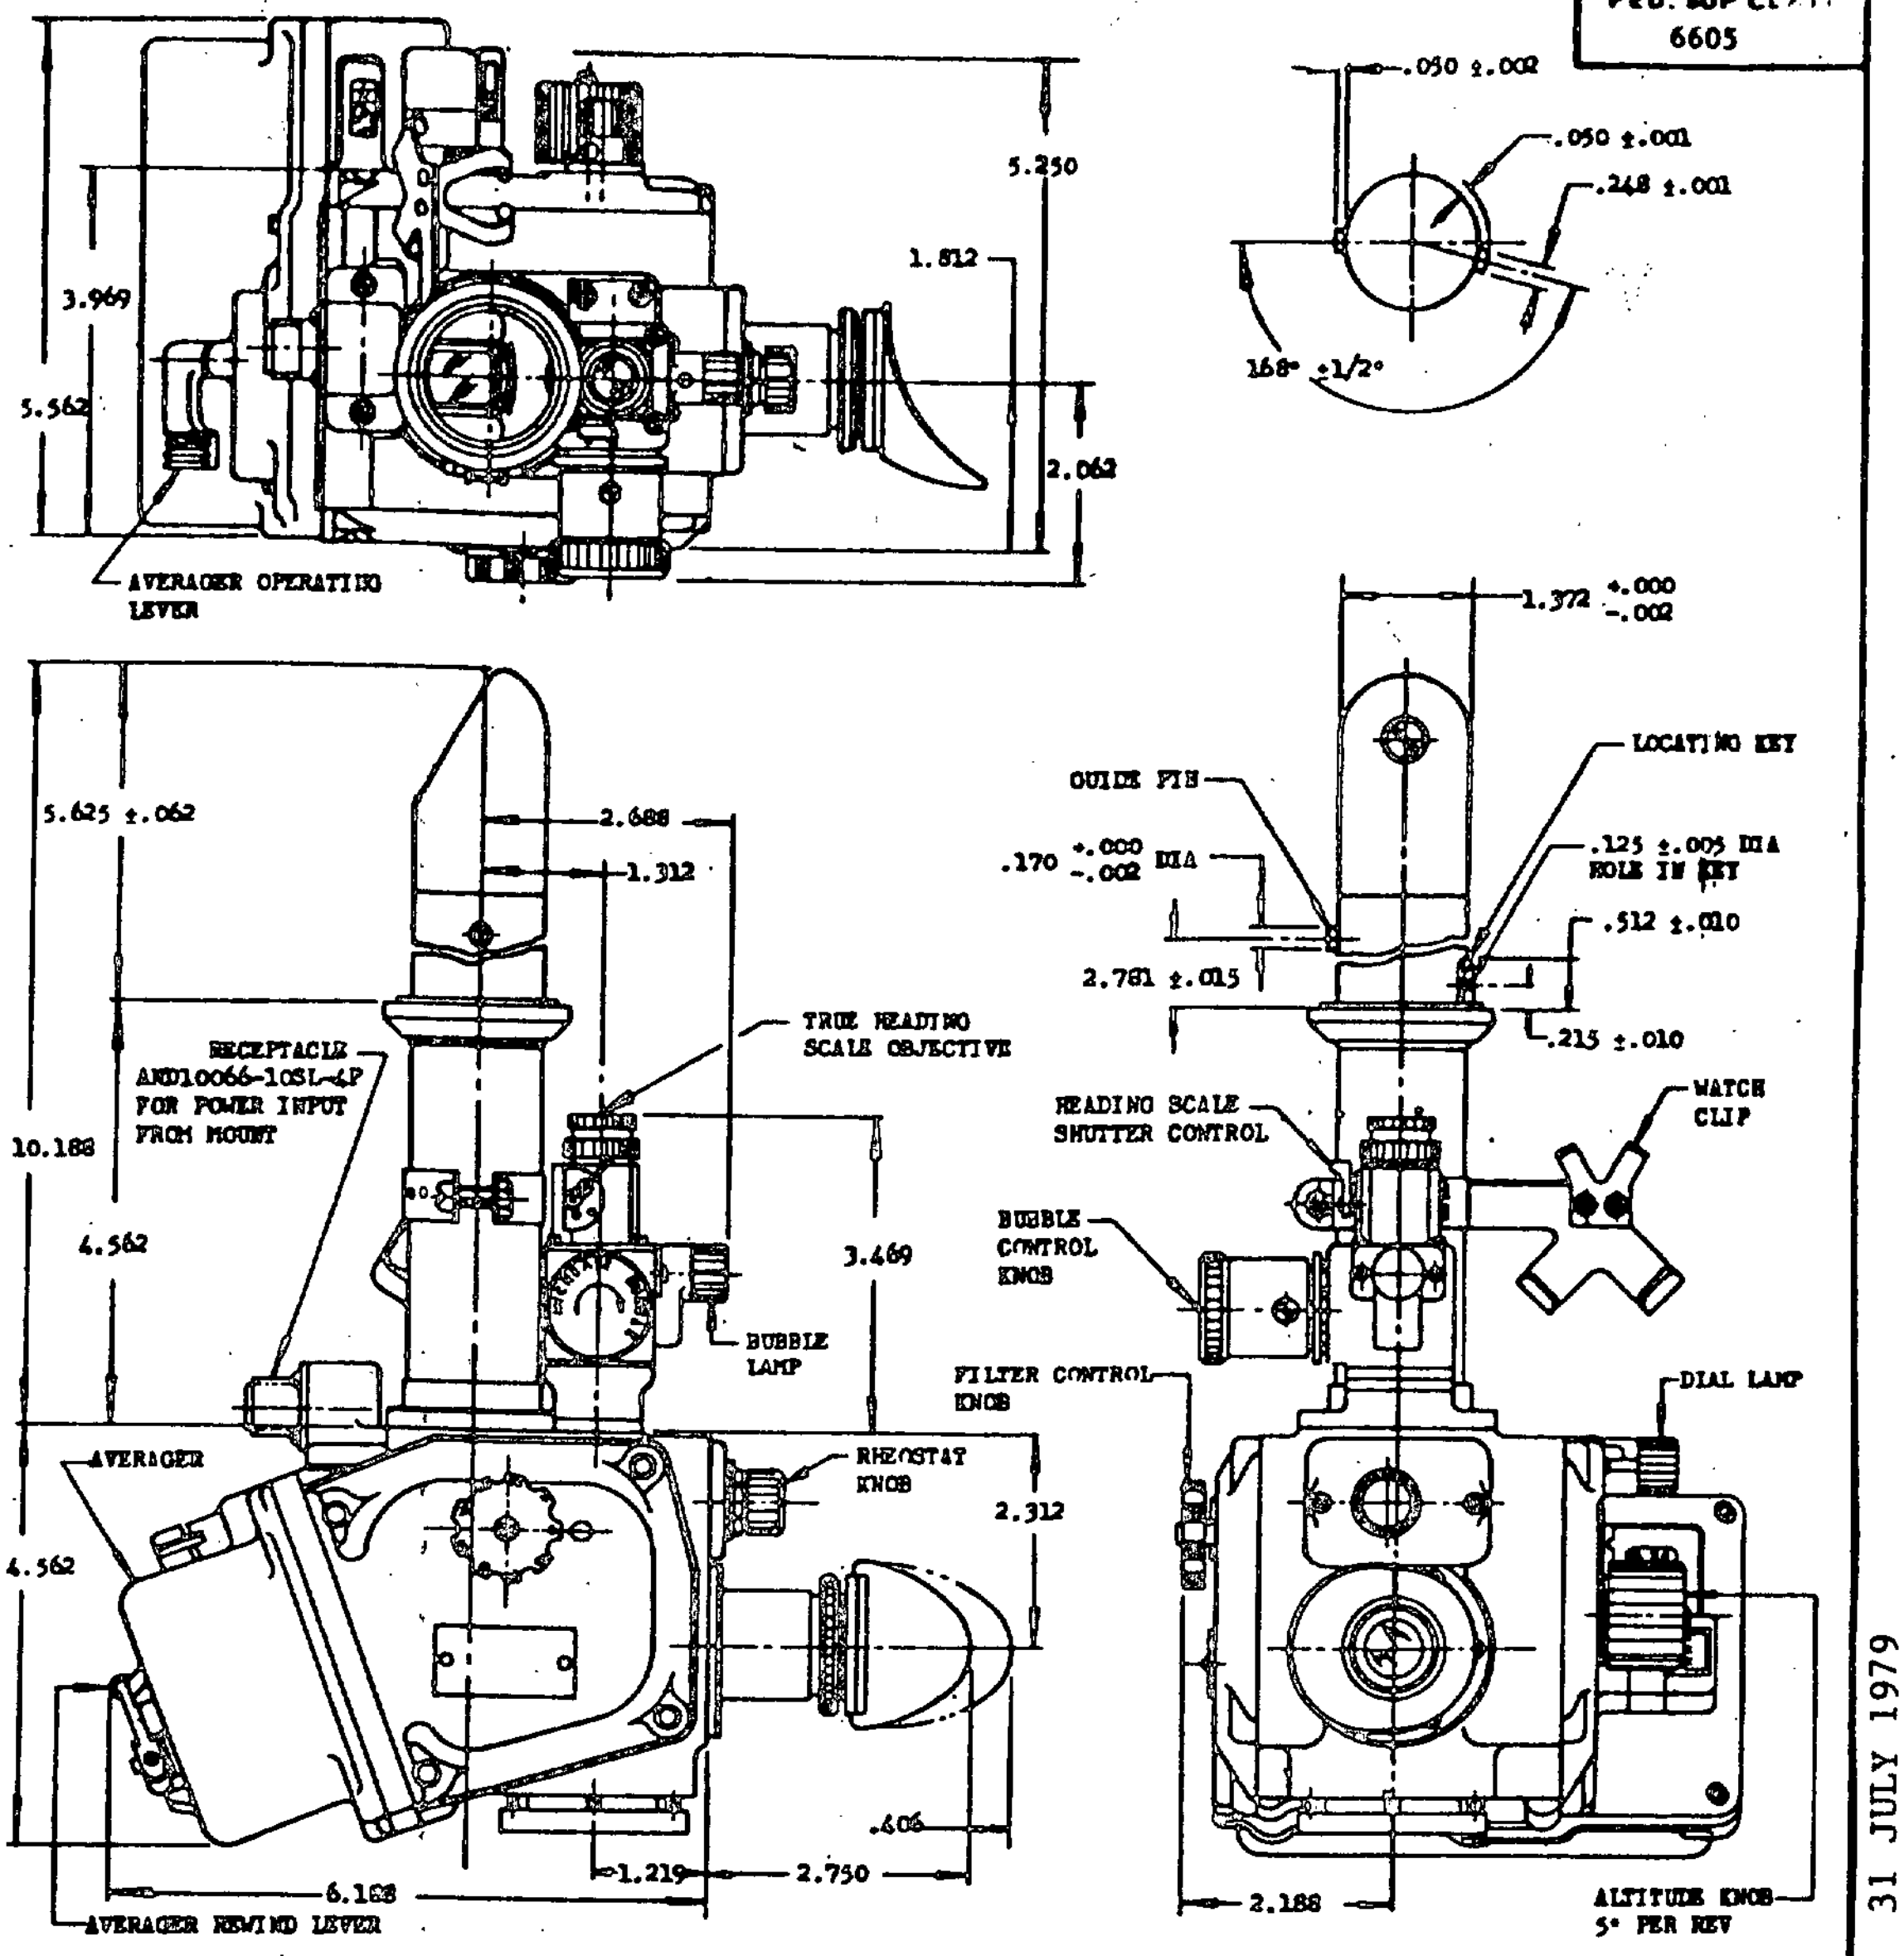

.050 ±.002
.050 ±.001
.248 ±.001
168° ±1/2°
5.250
1.812
3.969
5.562
2.062
AVERAGER OPERATING LEVER
1.372 +.000 -.002
LOCATING KEY
GUIDE PIN
.170 +.000 -.002 DIA
.125 ±.005 DIA HOLE IN KEY
.512 ±.010
2.781 ±.015
.215 ±.010
5.625 ±.062
2.688
1.312
TRUE HEADING SCALE OBJECTIVE
RECEPTACLE AN10066-10SL-4P FOR POWER INPUT FROM MOUNT
10.188
4.562
3.469
BUBBLE LAMP
HEADING SCALE SHUTTER CONTROL
WATCH CLIP
BUBBLE CONTROL KNOB
FILTER CONTROL KNOB
DIAL LAMP
AVERAGER
RHEOSTAT KNOB
2.312
4.562
.606
6.188
1.219
2.750
2.188
AVERAGER REWIND LEVER
ALTITUDE KNOB 5° PER REV

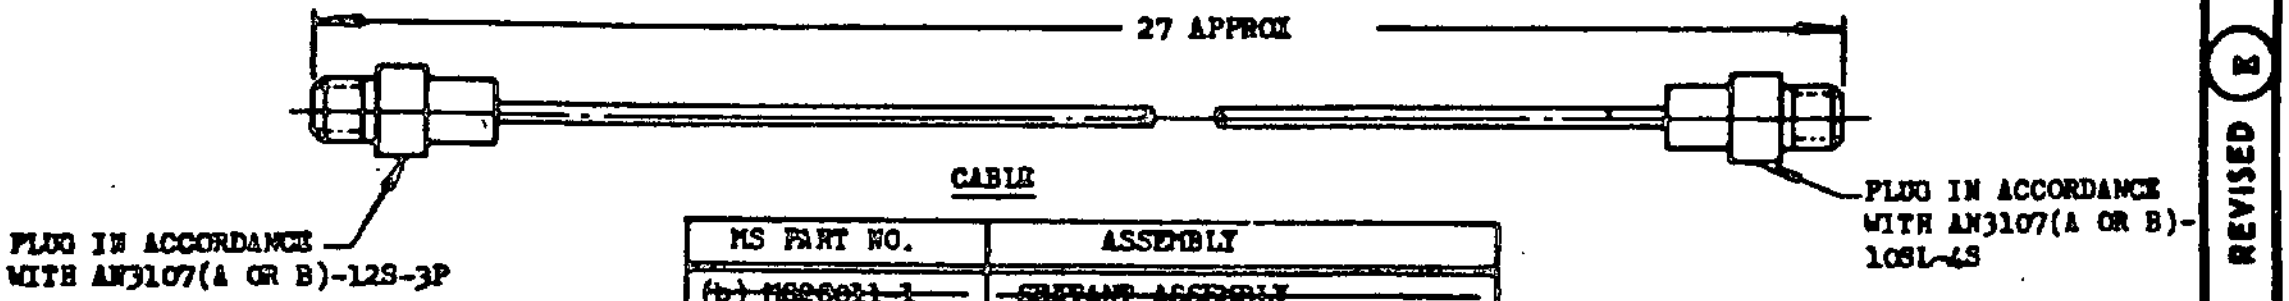

27 APPROX
PLUG IN ACCORDANCE WITH AN3107(A OR B)-12S-3P
PLUG IN ACCORDANCE WITH AN3107(A OR B)-10SL-4S

CABLE

Ⓒ

MS PART NO.	ASSEMBLY
~~(b) MS28011-1~~	~~SEXTANT ASSEMBLY~~
~~(b) MS28011-4~~	~~MS28011-1 AND MS28011-3~~
MS28011-5	SEXTANT
(a) MS28011-7	MS28011-5 AND MS28011-6

(a) THE MS28011-5 SEXTANT WILL NORMALLY BE PROCURED WITH THE MS28011-6 CASE AS ONE UNIT DESIGNATED MS28011-7.
(b) PART NOS. MS28011-1 AND MS28011-4 INACTIVE FOR DESIGN AFTER 15 JUNE 53. PART NOS. MS28011-5 AND MS28011-7 REPLACE MS28011-1 AND MS28011-4.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
CABLE AND PLUGS ARE SUPPLIED WITH THE SEXTANT AND NOT THE MOUNT.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

Ⓔ REVISED AND REDRAWN

APPROVED 11 JAN 51 REVISED Ⓔ 31 JULY 1979

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE SEXTANT - AIRCRAFT, PERISCOPIC	MILITARY STANDARD MS28011(AS)
PROCUREMENT SPECIFICATION MIL-S-5807	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. Proj.No.6605-N300 PLATE NO. 23071

FED. SUP CLASS
6605

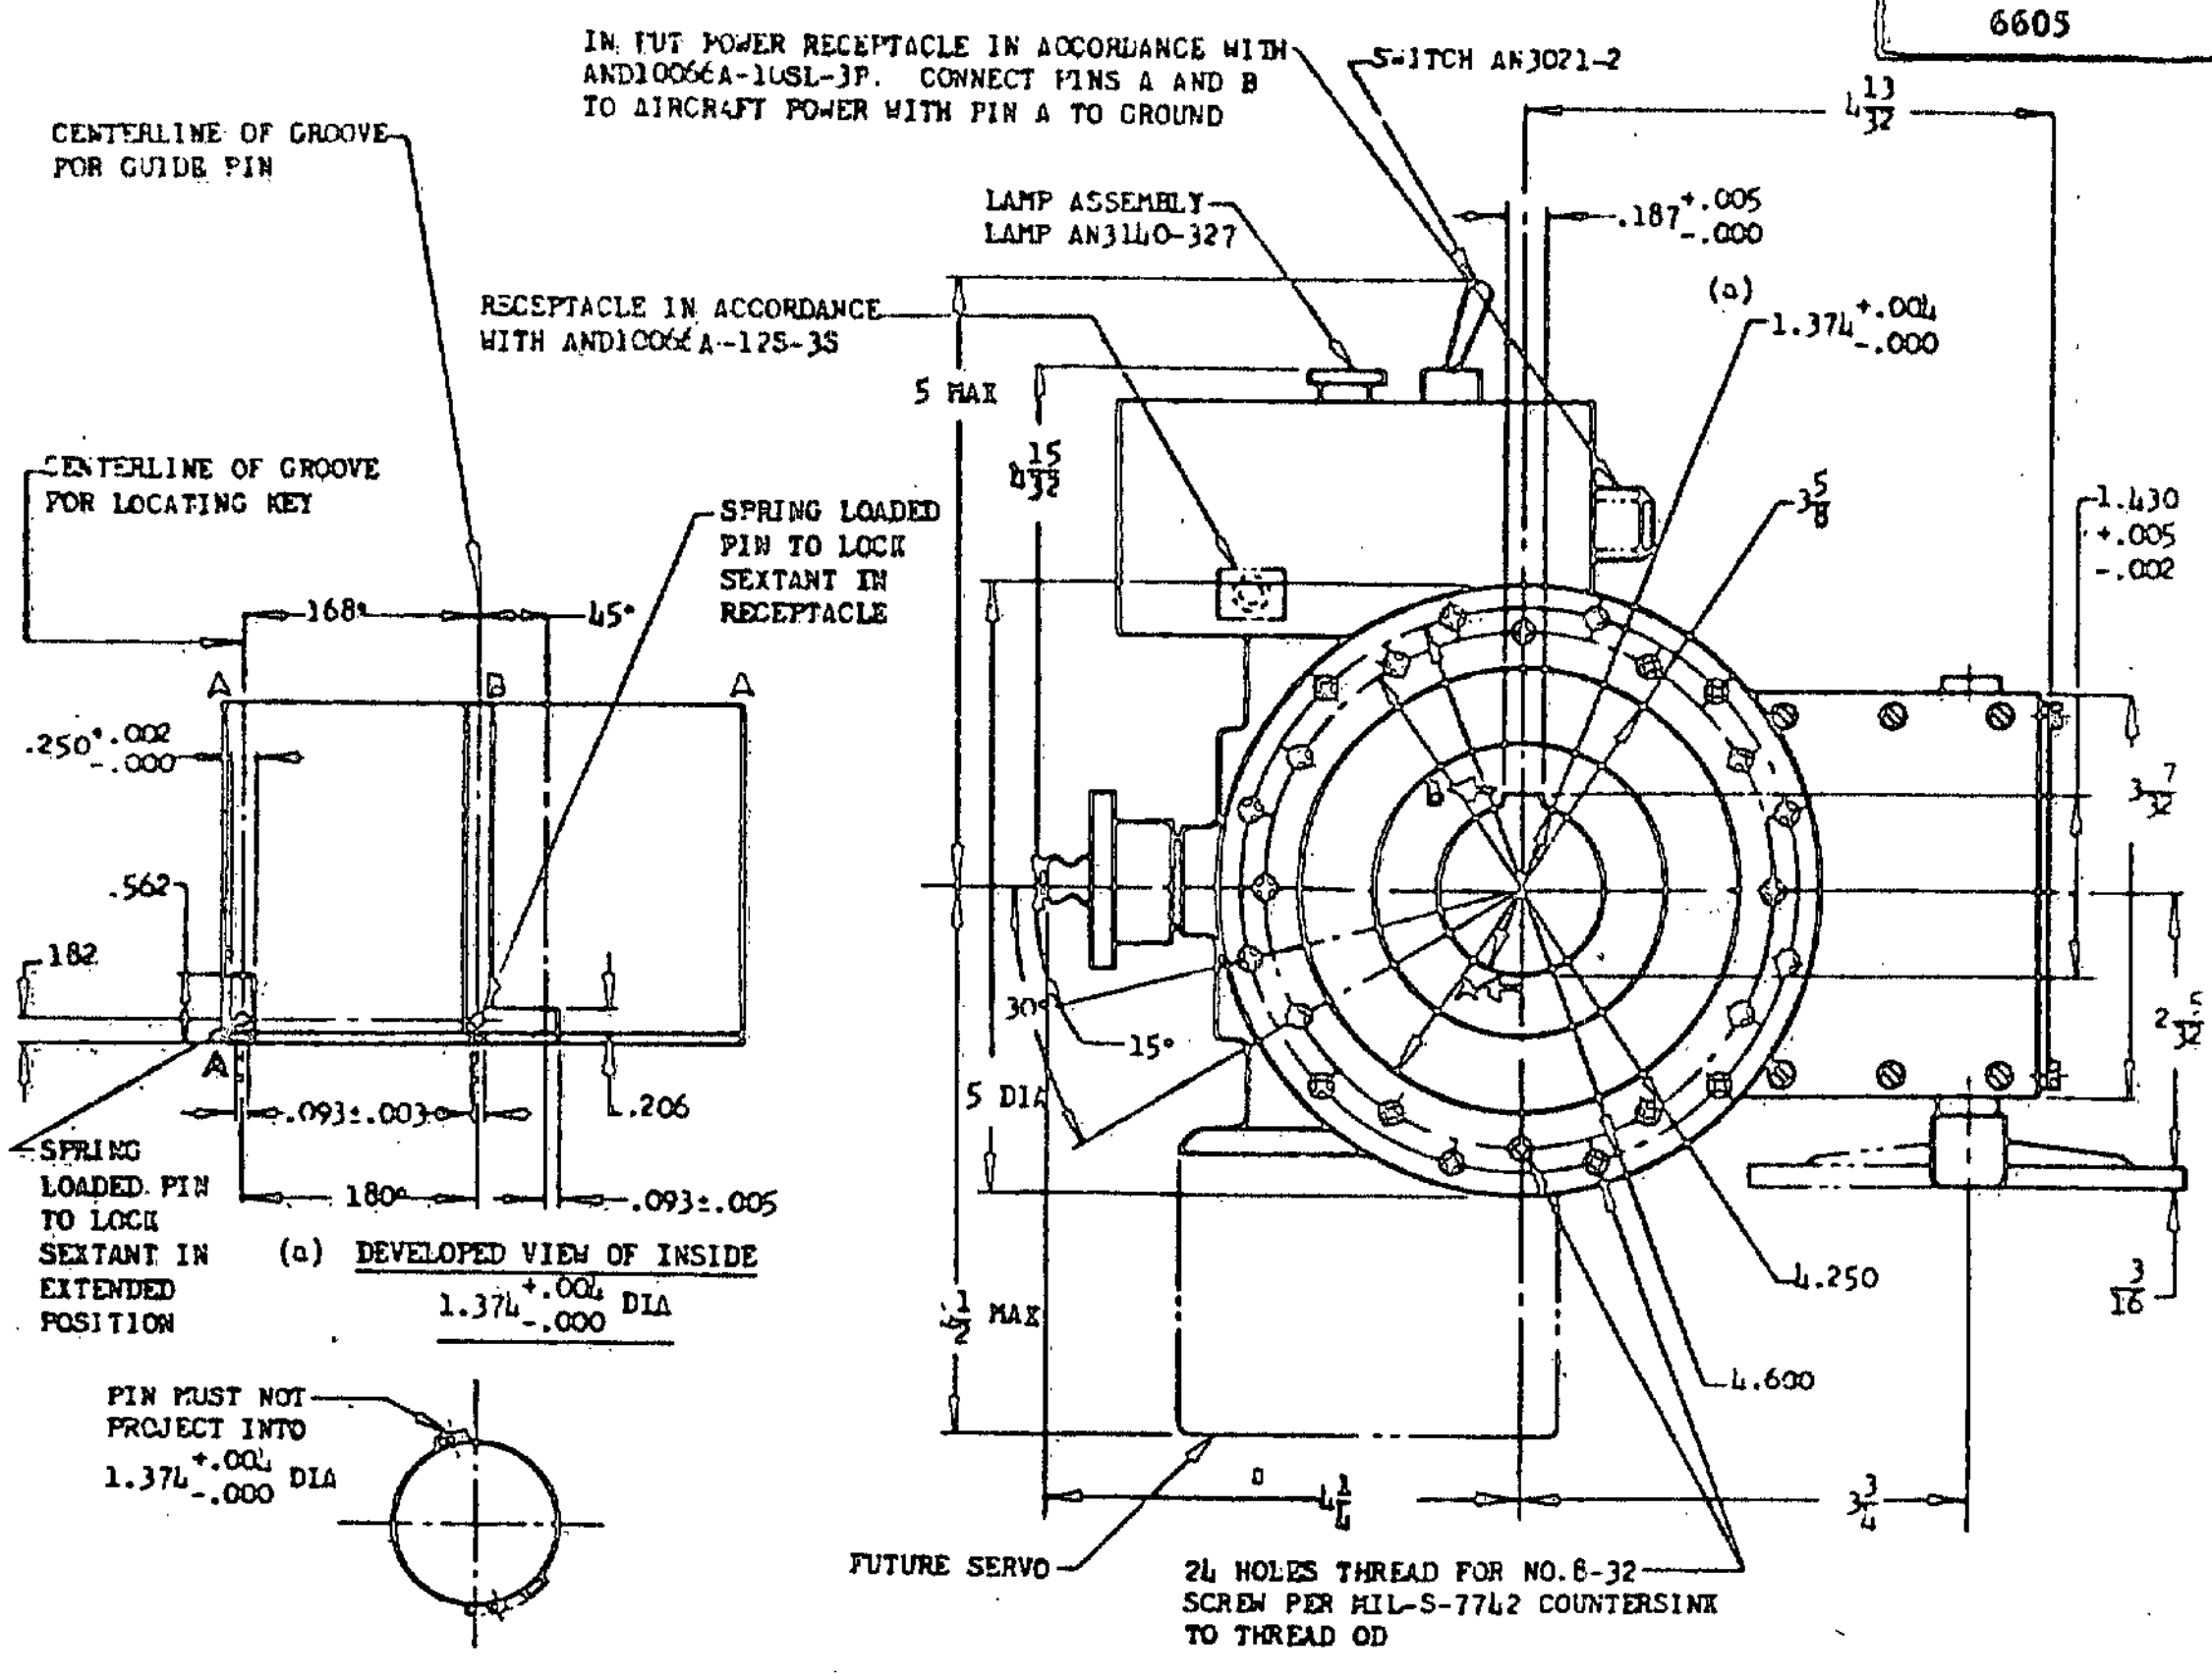
INPUT POWER RECEPTACLE IN ACCORDANCE WITH AND10066A-10SL-3P. CONNECT PINS A AND B TO AIRCRAFT POWER WITH PIN A TO GROUND
SWITCH AN3021-2
CENTERLINE OF GROOVE FOR GUIDE PIN
4 13/32
LAMP ASSEMBLY-LAMP AN3140-327
.187 +.005 -.000
RECEPTACLE IN ACCORDANCE WITH AND10066A-12S-3S
(a)
1.374 +.004 -.000
5 MAX
4 15/32
CENTERLINE OF GROOVE FOR LOCATING KEY
SPRING LOADED PIN TO LOCK SEXTANT IN RECEPTACLE
3 5/8
1.430 +.005 -.002
168°
45°
A
B
A
.250 +.002 -.000
.562
.182
A
3 7/32
30°
15°
5 DIA
2 5/32
SPRING LOADED PIN TO LOCK SEXTANT IN EXTENDED POSITION
.093±.003
.206
180°
.093±.005
4.250
3/16
4 1/2 MAX
4.600
PIN MUST NOT PROJECT INTO 1.374 +.004 -.000 DIA
D
4 1/4
3 3/4
FUTURE SERVO
24 HOLES THREAD FOR NO.8-32 SCREW PER MIL-S-7742 COUNTERSINK TO THREAD OD

(a) DEVELOPED VIEW OF INSIDE 1.374 +.004 -.000 DIA

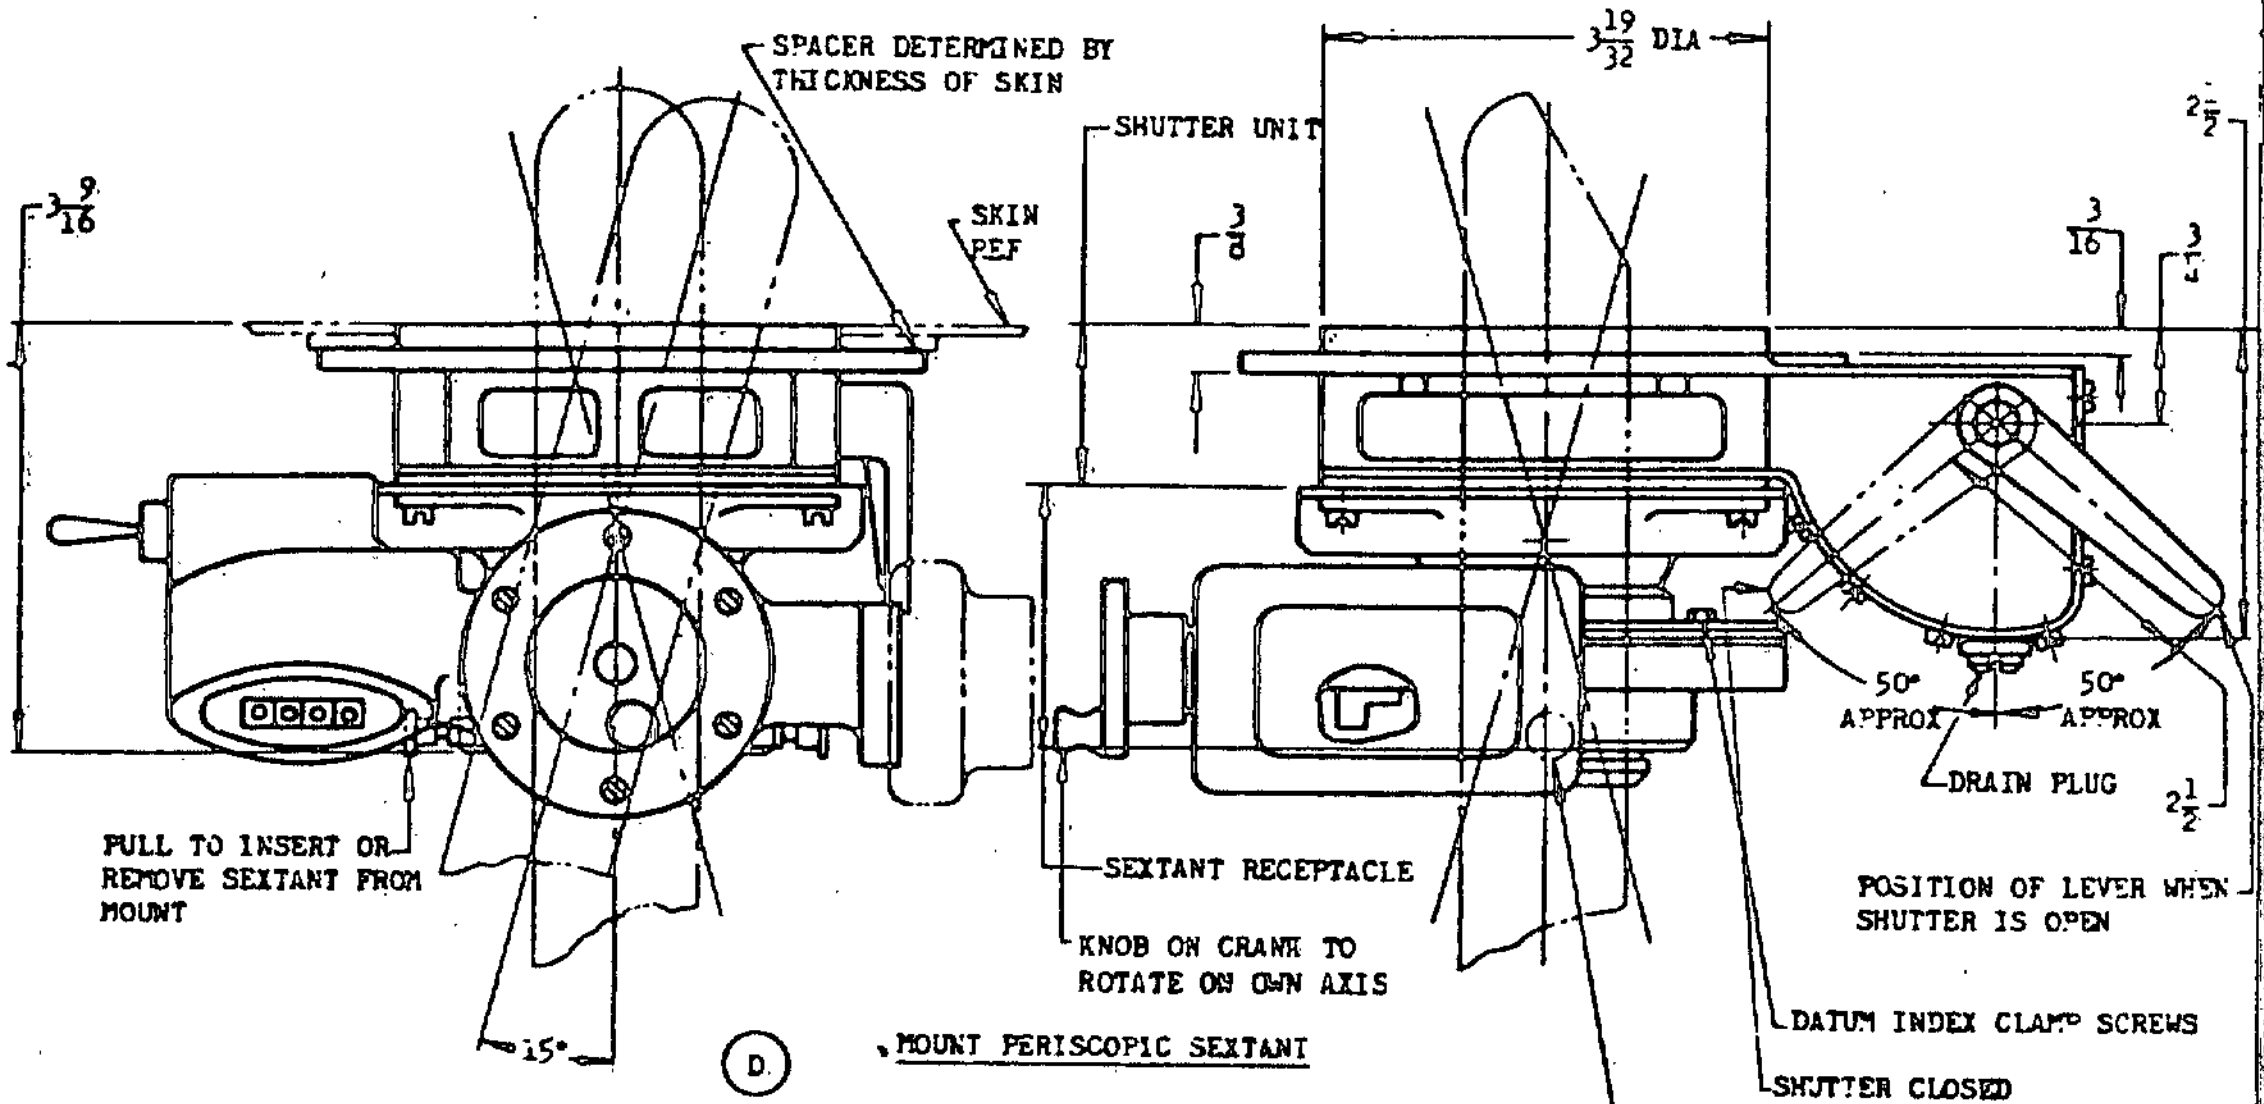
SPACER DETERMINED BY THICKNESS OF SKIN
3 19/32 DIA
SHUTTER UNIT
2 1/2
3 9/16
SKIN REF
3/8
3/16
3/4
50° APPROX
50° APPROX
DRAIN PLUG
2 1/2
PULL TO INSERT OR REMOVE SEXTANT FROM MOUNT
SEXTANT RECEPTACLE
POSITION OF LEVER WHEN SHUTTER IS OPEN
KNOB ON CRANK TO ROTATE ON OWN AXIS
DATUM INDEX CLAMP SCREWS
15°
SHUTTER CLOSED
PULL TO RETRACT SEXTANT

Ⓓ MOUNT PERISCOPIC SEXTANT

MS PART NO.	ASSEMBLY
MS28011-2	RUBBER SHOCK RING
MS28011-8	NYLON/TEFLON SHOCK RING

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/32, DECIMALS ±.010, ANGLES ±1/2°.

APPROVED 11 JAN 51 REVISED Ⓑ FOR CHANGES SEE SHEETS 1 THRU 3

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are requested to employ this standard where suitable.

P.A NAVY - AS Other Cust	TITLE SEXTANT - AIRCRAFT, PERISCOPIC	MILITARY STANDARD MS28011(AS)
PROCUREMENT SPECIFICATION MIL-S-5807	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination)

*PREVIOUS EDITION OF THIS FORM IS OBSOLETE

PLATE NO. 20071

FED. SUP CLASS
6605

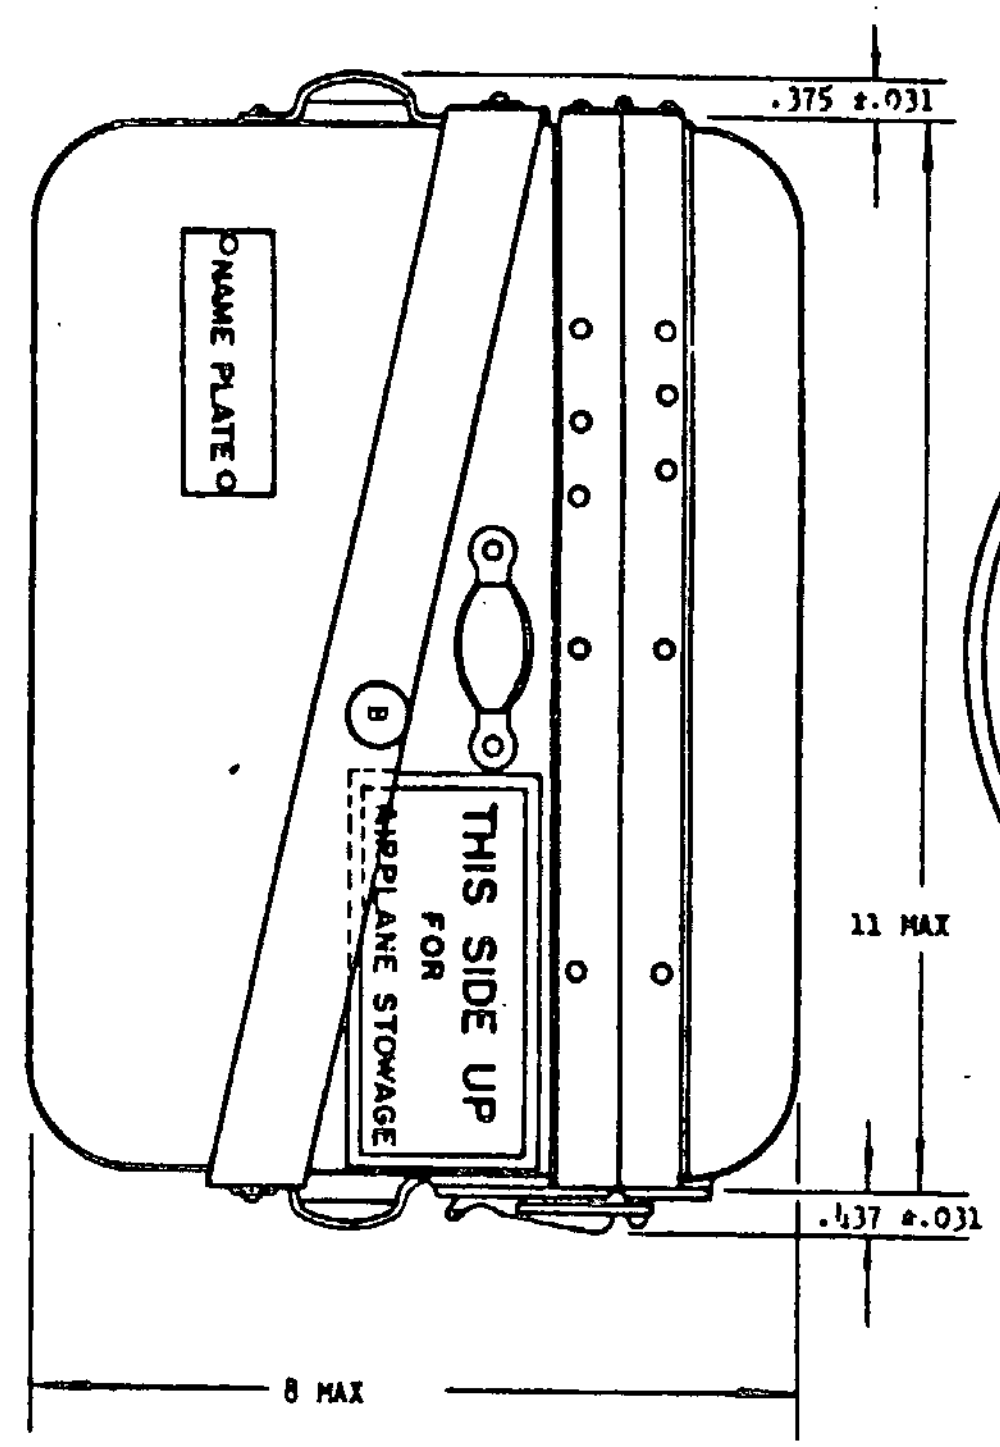
.375 ±.031
11 MAX
.437 ±.031
8 MAX
THIS SIDE UP
FOR
AIRPLANE STOWAGE
B
NAME PLATE

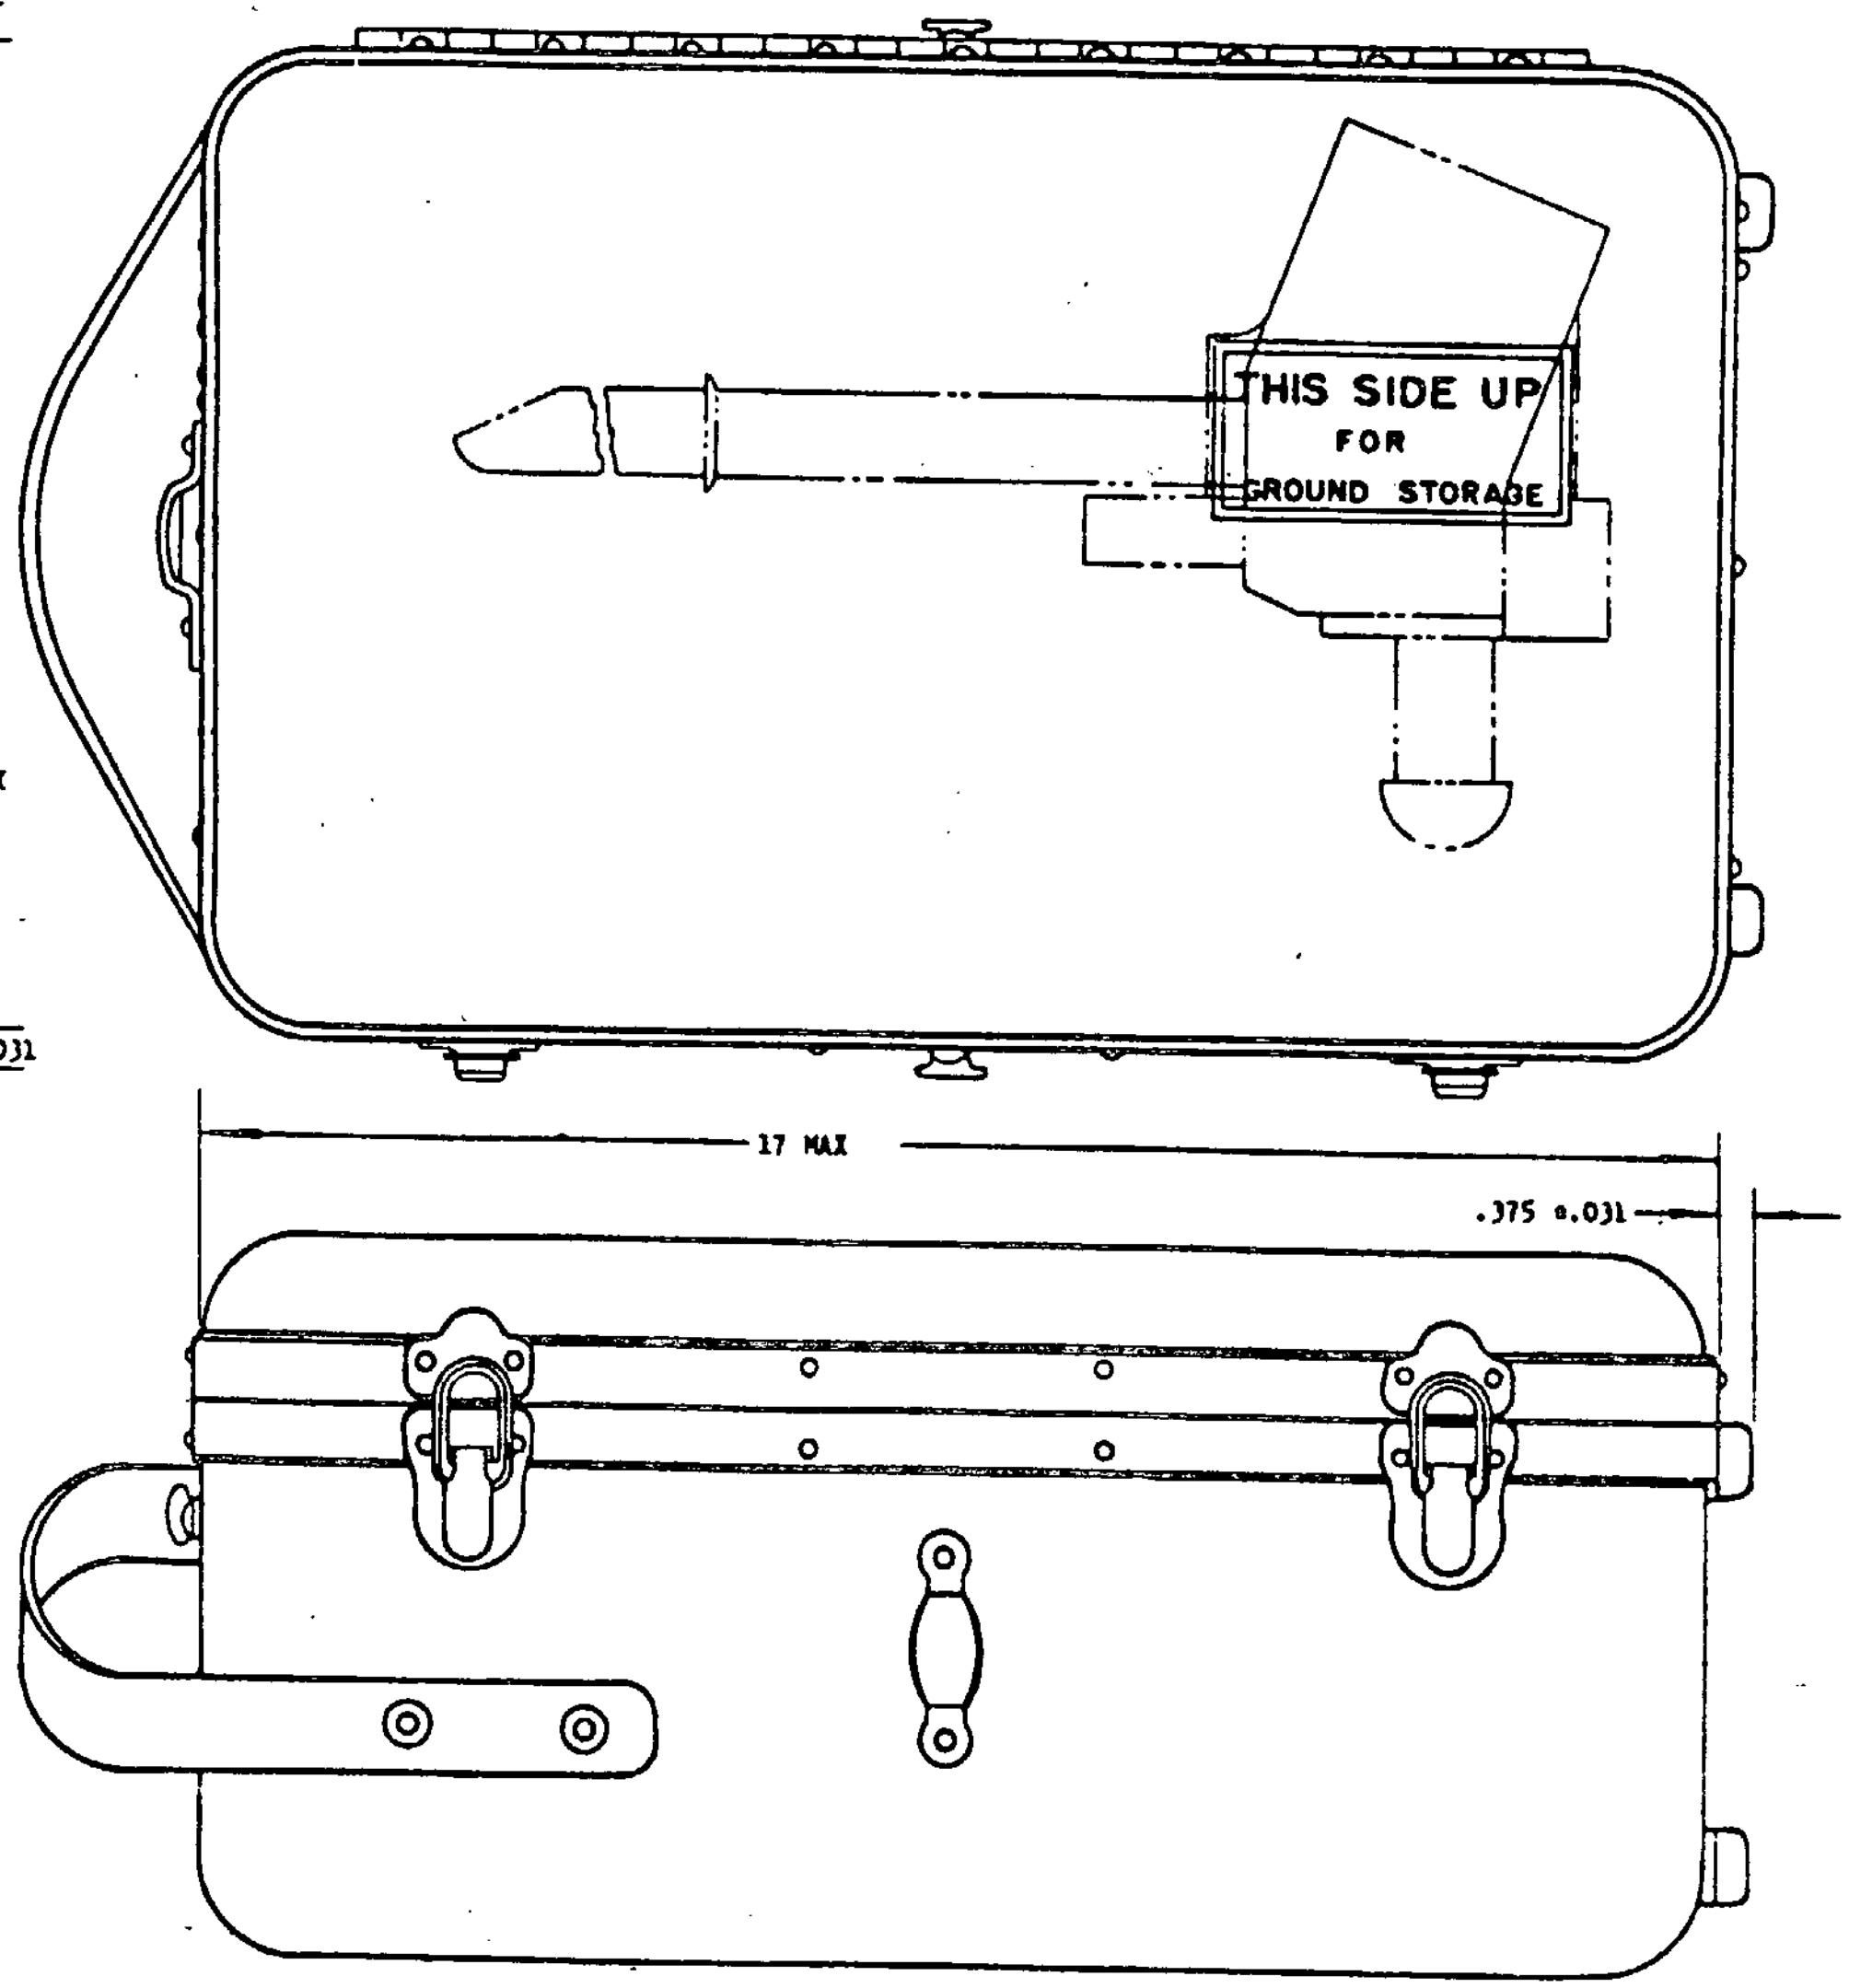
THIS SIDE UP
FOR
GROUND STORAGE
17 MAX
.375 ±.031

CASE-CARRYING

	MS PART NO.
	MS28011-3
(b)	MS28011-6

(a) SEXTANT SHALL BE POSITIONED APPROXIMATELY AS SHOWN.

(b) PART NO. MS28011-3 INACTIVE FOR DESIGN AFTER 15 JUNE 1953 . PART NO. MS28011-6 REPLACES PART NO. MS28011-3.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

DIMENSIONS IN INCHES.

APPROVED 11 JAN 51 REVISED Ⓔ FOR CHANGES SEE SHEETS 1 THRU 3

ment of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE SEXTANT - AIRCRAFT, PERISCOPIC	MILITARY STANDARD MS28011(AS)
PROCUREMENT SPECIFICATION MIL-S-5807	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23871