FED. SUP CLASS
5935


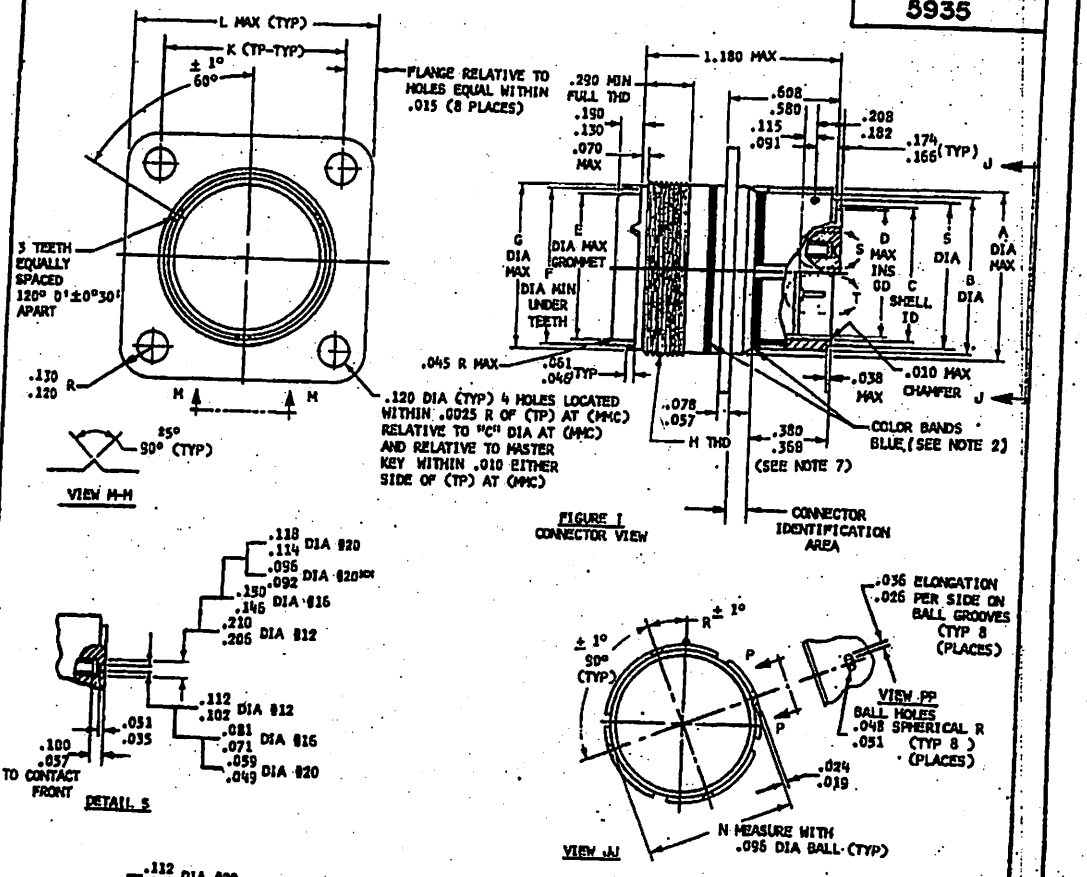



FIGURE 1
CONNECTOR VIEW

DETAIL S

VIEW JJ



DETAIL T



PANEL CUTOUT
FOR FRONT OR REAR MOUNT

XX ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART.

PART NUMBER EXAMPLE: MS3424 L 19 - 50 P B

- MS NUMBER
- CLASS
- SHELL SIZE
- INSERT ARRANGEMENT
- ALTERNATE INSERT POSITION
- CONTACT STYLE

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR SOCKET CONTACT CHAMFER LEAD-INS AND PIN CONTACT RAISED SEAL BARRIERS.

SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5, 6, 8, 9, 11 AND 12

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, WALL MOUNTING FLANGE, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E).	MILITARY STANDARD MS 3424 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 3

DD FORM 10 APR 672

5935-N668-7

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities may employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.


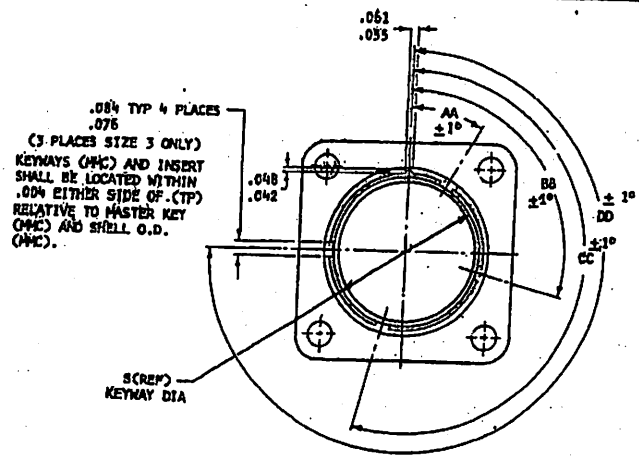


FIGURE II
KEYWAY POSITIONS

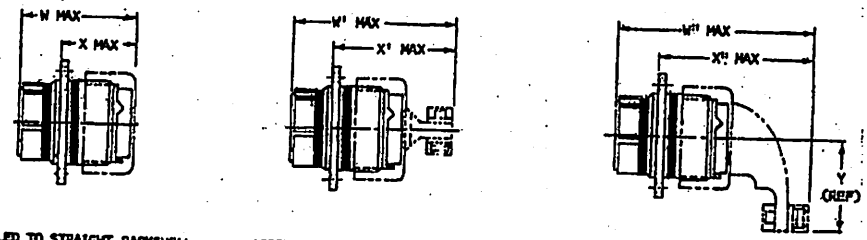


ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF (SEE NOTE 3)

ASSEMBLED TO STRAIGHT BACKSHELL WITH STRAIN RELIEF (SEE NOTE 3)

ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF (SEE NOTE 3)

FIGURE III
BACKSHELL ACCESSORIES

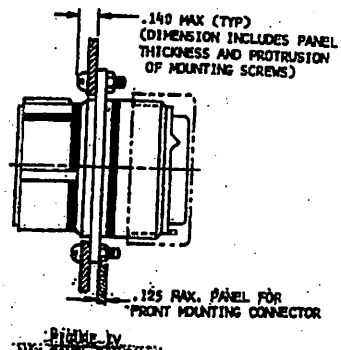

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, WALL MOUNTING FLANGE, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS3424 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ ... standardization is suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

TABLE I

CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	E	F	G	H THREAD	K	L	N	R
3	.573	.441/.431	.367/.356	.350	.351	.441	.509	9/16-20 UNEF-2A	.625	.891	.398/.391	30°
7	.686	.576/.566	.483/.473	.451	.531	.613	.687	3/4-20 UNEF-2A	.719	1.016	.533/.526	22° 30'
12	.823	.710/.700	.624/.614	.553	.665	.731	.812	7/8-20 UNEF-2A	.812	1.109	.658/.661	22° 30'
19	.948	.849/.839	.763/.753	.738	.790	.861	.937	1-20 UNEF-2A	.906	1.203	.805/.799	22° 30'
27	1.161	1.004/.994	.918/.908	.864	.869	.919	.992	1 1/16-18 UNEF-2A	.958	1.297	.961/.954	22° 30'
37	1.261	1.126/1.116	1.040/1.030	.978	.994	1.044	1.117	1 3/16-18 UNEF-2A	1.187	1.453	1.083/1.078	22° 30'
61	1.573	1.414/1.404	1.316/1.306	1.271	1.280	1.361	1.427	1 1/2-18 UNEF-2A	1.435	1.797	1.357/1.360	22°30'

SHELL SIZE	S	U	W	W'	W''	X	X'	X''	Y
3	.392/.385	.583	1.452	1.802	2.009	.950	1.300	1.510	.850
7	.527/.520	.760	1.452	1.802	2.210	.950	1.300	1.710	.950
12	.661/.654	.885	1.452	2.037	2.300	.950	1.535	1.800	1.010
19	.800/.793	1.010	1.452	2.037	2.435	.950	1.535	1.935	1.070
27	.955/.948	1.141	1.452	2.037	2.534	.950	1.535	2.030	1.130
37	1.077/1.070	1.272	1.452	2.037	2.667	.950	1.535	2.165	1.190
61	1.365/1.358	1.583	1.452	2.037	2.914	.950	1.535	2.433	1.335

SHELL SIZE	*WEIGHT MAX (LBS) PIN INSERT	SOC INSERT
3	.0183	.0191
7	.0241	.0255
12	.0313	.0335
19	.0387	.0434
27	.0456	.0529
37	.0608	.0682
61	.0927	.1057

*WEIGHT LISTED IS FOR CONNECTOR WITH MAX DENSITY INSERT ARRANGEMENT LESS CONTACTS AND BACKSHELL ACCESSORIES.

TABLE II

KEY POSITIONS

SIZE	AA	BB	CC	DD
3	73°	97°	187°	---
7	73°	97°	187°	277°
12	30°	105°	195°	270°
19	30°	105°	195°	270°
27	30°	105°	195°	270°
37	30°	105°	195°	270°
61	30°	105°	195°	270°

NOTES:

1. THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTOR DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF MIL-C-81703.
2. COLOR BAND .100 WIDE MAX. BAND LOCATION MUST BE SUCH THAT IT IS VISIBLE WHEN CONNECTOR IS MOUNTED.
3. CONNECTOR ASSEMBLY MUST INCLUDE A BACKSHELL TO MEET THE MOISTURE SEALING REQUIREMENTS OF THE PROCUREMENT DOCUMENT. SEE MS 3416, MS 3417 AND MS 3418 FOR APPLICABLE BACKSHELL ACCESSORIES.
4. MATERIALS: SHELLS: 6061-T6 PER QQ-A-367.
5. THE FINISH ON THE SHELLS SHALL BE ELECTROLESS NICKEL.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR TOLERANCE, X° ±1°-0' AND X°X' ±20'.
7. .380/.368 DIM. CONTROLS BOTH THE LENGTH OF KEYWAY AND START OF ANGLE FROM "B" DIA.
8. DIAMETERS SHOWN ARE AT BASE OF BARRIERS.

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS	International Interest	TITLE	MILITARY STANDARD
Other Cust		CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, WALL MOUNTING FLANGE, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MS3424 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard where applicable.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T13:04Z
Check the source to verify that this is the current version before use.