FED. SUP CLASS
5935


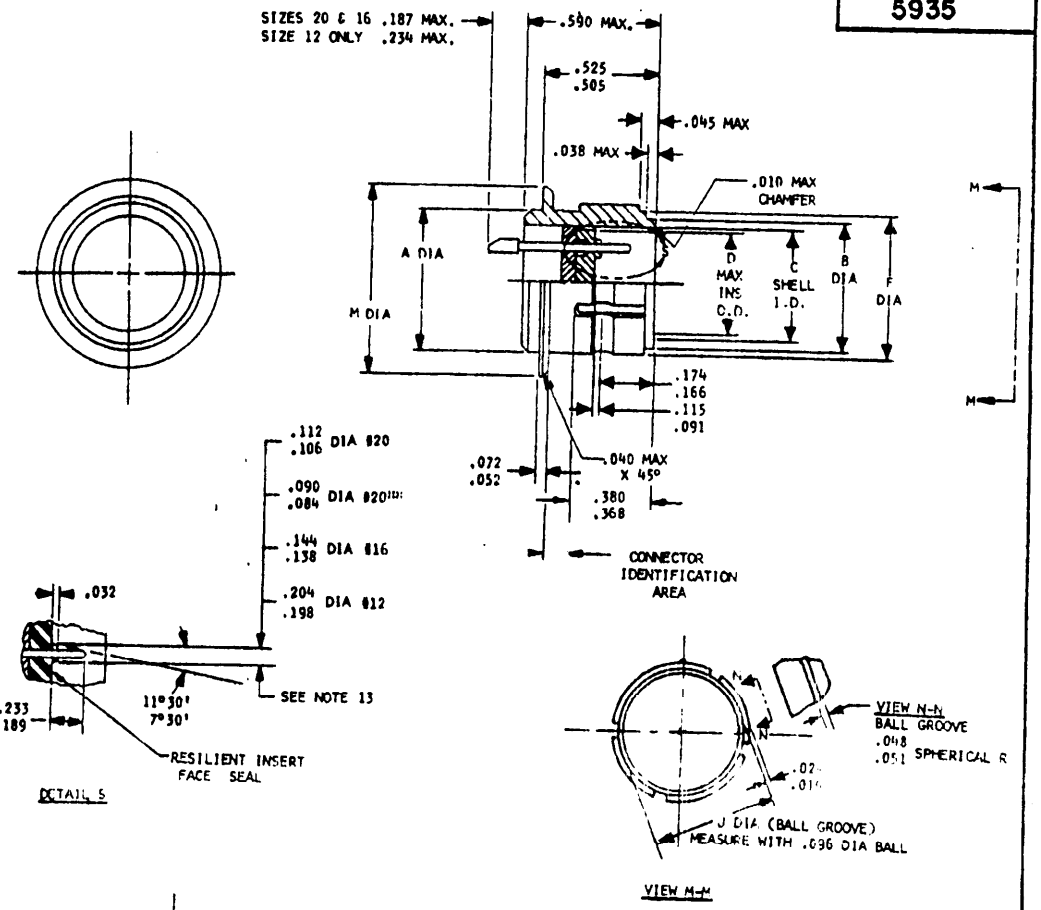


FIGURE 1
CONNECTOR VIEW



PANEL CUTOUT

[1]ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART.

PART NUMBER EXAMPLE:

MS3463 H 3 - 50 P Y
- Y: ALTERNATE INSERT POSITION
- P: CONTACT STYLE (P-PIN)
- 50: INSERT ARRANGEMENT
- 3: SHELL SIZE
- H: CLASS
- MS3463: MS NUMBER

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR PIN CONTACT RAISED SEAL BARRIERS

SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5, 6, 8, 9, 11 & 12

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, SOLDER MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS3463(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-N668-8

(Limited Coordination)

This standard is approved by the Department of the NAVY and is mandatory for use by the activity. All other military activities are required to apply it as standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.


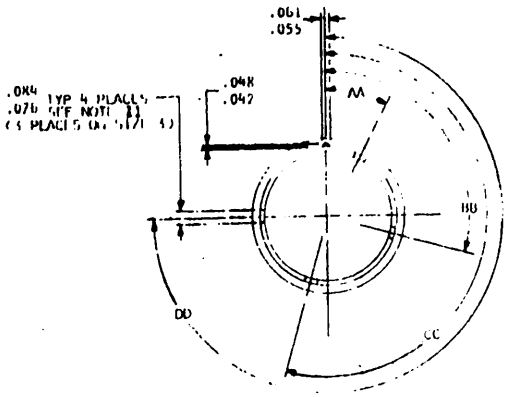



FIGURE 11
KEYWAY POSITIONS

TERMINATION END OF CONTACTS

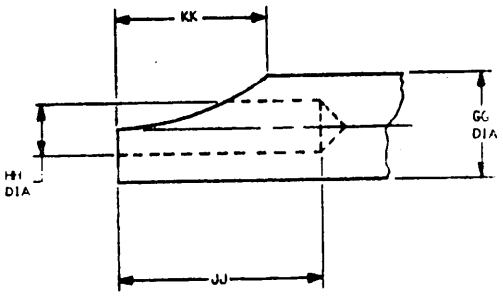

SOLDERPOT

ENGAGING END OF CONTACTS

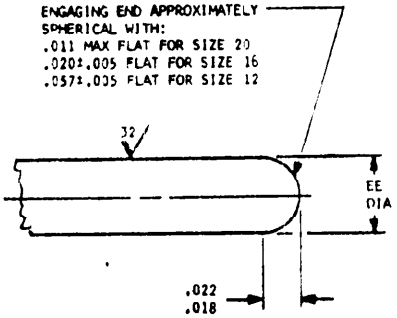

SIZE 20 ENGAGING END
(OPTIONAL)

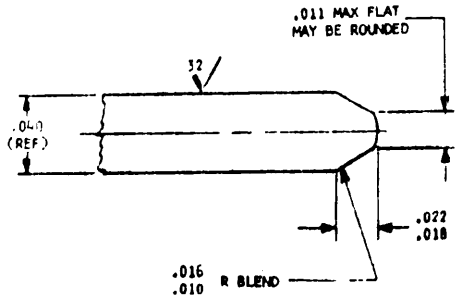


FIGURE 111
CONTACT DETAILS

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, SOLDER MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H),	MILITARY STANDARD MS 3463(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

Preparing activity: Navy - AS
Approved by the Department of the NAVY and is mandatory for use by the Navy. All other military activities are required to use this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

TABLE I
CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	F	J	M
3	.497	.392 .385	.367 .356	.330	.441 .431	.399 .391	.602 .582
7	.622	.527 .520	.483 .473	.451	.576 .566	.534 .526	.760 .740
12	.747	.661 .654	.624 .614	.553	.710 .700	.669 .661	.885 .865
19	.904	.800 .793	.763 .753	.738	.849 .839	.807 .799	1.010 .990
27	1.060	.955 .948	.918 .908	.834	1.004 .994	.962 .954	1.192 1.172
37	1.153	1.077 1.070	1.040 1.030	.978	1.126 1.116	1.084 1.076	1.291 1.271
61	1.435	1.365 1.358	1.316 1.306	1.271	1.414 1.404	1.367 1.360	1.572 1.562

SHELL SIZE	N	WEIGHT (LBS) SEE NOTE 7 PIN INSERT
3	.515	(WEIGHT WILL BE SUPPLIED IN LATER REVISION)
7	.640	
12	.764	
19	.890	
27	1.077	
37	1.271	
61	1.453	

TABLE II
KEYWAY POSITIONS

SIZE	AA	BB	CC	DD
3	23°	97°	187°	—
7	23°	97°	187°	277°
12	30°	105°	195°	270°
19	30°	105°	195°	270°
27	30°	105°	195°	270°
37	30°	105°	195°	270°
61	30°	105°	195°	270°

TABLE III
CONTACT DIMENSIONS

CONT SIZE	EE	GG	HH	JJ	KK
20	.041 .039	.088 .061	.058 .052	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.078 .072	.251 .172	.141 .109
12	.095 .093	.150 .130	.122 .110	.251 .172	.143 .109

NOTES: (NOTES 1 THRU 6 APPLICABLE TO CONTACTS ONLY).

1. CONTACT FINISH: GOLD PLATE .000050 INCH MIN IN ACCORDANCE WITH MIL-G-45204. A SUITABLE UNDERPLATING MAY BE USED. SILVER UNDERPLATING SHALL NOT BE USED. FINISH IS APPLIED AFTER SEALING.
2. DIMENSIONS IN INCHES, DIMENSIONS APPLY AFTER PLATING.
3. 63 ALL OVER PER ASA-B46.1-1962 UNLESS OTHERWISE SPECIFIED.
4. REMOVE ALL BURRS AND SHARP EDGES .003 TO .005 R.
5. DIAMETERS TO BE CONCENTRIC WITHIN .004 TIR.
6. DIAMETERS IN THE SAME CROSS-SECTIONAL PLANE TO BE CONCENTRIC WITH EACH OTHER WITHIN .003 TIR.
7. WEIGHT LISTED IS CONNECTOR MAXIMUM WEIGHT PER SHELL SIZE.
8. SHELL MATERIAL: COLD ROLLED STEEL, PER QQ-S-637
9. SHELL FINISH: .0001 MIN. TIN PER MIL-T-10727, OVER NICKEL PER QQ-N-290.
10. EACH CONNECTOR SHALL BE PACKAGED WITH A PLASTIC DUST CAP OVER EACH END OF SHELL.
11. FOUR KEYWAYS' (MMC) AND INSERT SHALL BE LOCATED WITHIN .004 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL O.D. (MMC).
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ± .010 AND .XXX ± .005; ANGULAR TOLERANCE, X° ±1°-0' AND X°X'' ± 30'.
13. DIAMETERS SHOWN ARE AT BASE OF BARRIERS.

APPROVED 21 July 1971 REVISED

P.A. NAVY-AS Other Cust	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, SOLDER MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS 3463(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 10 APR 64 672 (Limited Coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-157/830

This standard has been approved by the Department of the NAVY and is mandatory for use by activity. All other military activities are required to apply this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.