

FED SUP CLASS
3830

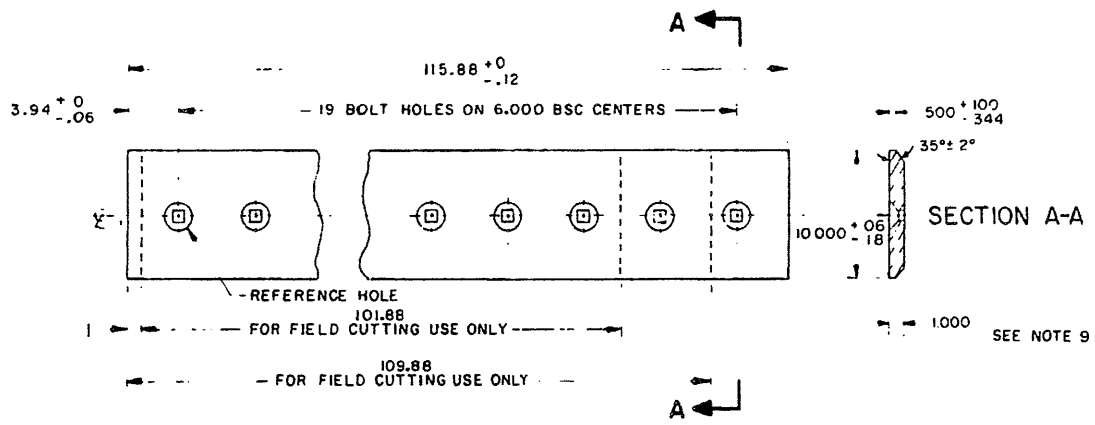

PHYSICAL PROPERTIES
SURFACE HARDENED CUTTING EDGES

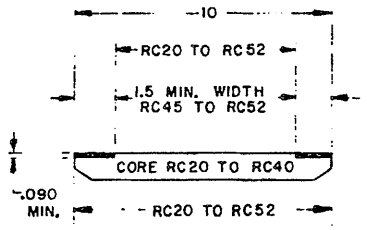

OPTION: CAST OR THROUGH HARDENED
CUTTING EDGES
SURFACE HARDNESS - RC45 TO RC52
CORE HARDNESS - RC43 MIN
MIN IMPACT VALUE - 15 FT-LBS. CHARPY
"V" NOTCH AT 65° F. TO 85° F.

PART NUMBER - MS39103-1

NOTES:

1. CUTTING EDGES AS SHOWN FOR MS39103-1 WILL BE FIELD CUT TO FIT VARIOUS MAKES AND MODELS OF DOZERS.
2. BOLTS FOR PART NUMBER MS39103-1 SHALL BE 0.875 INCH IN DIAMETER AND CONFORM TO AMERICAN STANDARD B18.9, NO. 3 HD PLOW BOLTS.
3. HOLES FOR PART NUMBER MS39103-1SHALL BE FOR A 0.875 INCH DIAMETER BOLT IN ACCORDANCE WITH NOTE 2 AND DRAWINGS 2 OR 3 OF SAE STANDARD FOR COUNTERSUNK SQUARE HOLES FOR CUTTING EDGES AND END BITS (J740b).
4. COUNTER BORE/COUNTERSINK SHALL BE LOCATED AT TRUE POSITION WITHIN .063 DIA FOR NUMBER OF HOLES SPECIFIED IN ACCORDANCE WITH SAE J737b.
5. SQUARE HOLES SHALL BE CONCENTRIC TO COUNTERBORE, COUNTERSINK WITHIN .031 TOTAL FOR NUMBER OF HOLES SPECIFIED IN ACCORDANCE WITH SAE J740b.
6. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES.

(D) ENTIRE STANDARD REVISED


APPROVED 12 FEB 1960 REVISED (D) 12 Sep 1972

P.A. ME Other Cust AIR FORCE - 84	TITLE CUTTING EDGE, MOLDBOARD, DOZER	MILITARY STANDARD MS 39103
PROCUREMENT SPECIFICATIONS MIL-D-17076	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (recommended)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

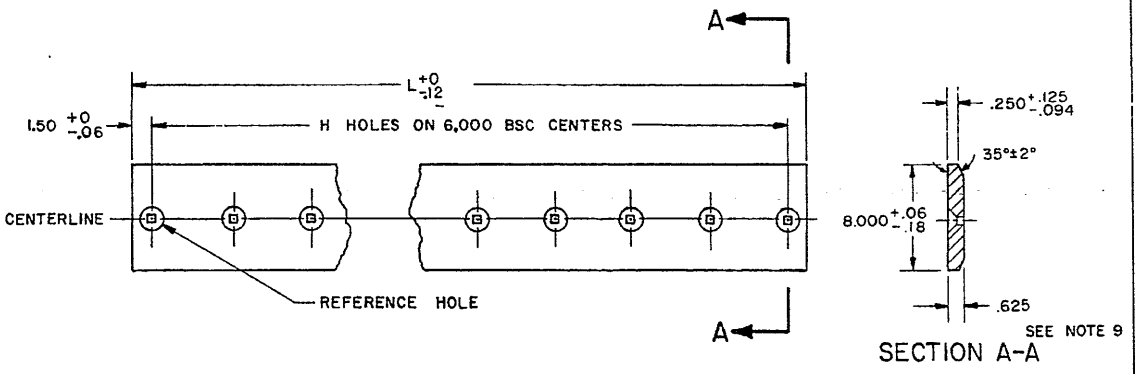

SECTION A-A

PHYSICAL PROPERTIES
SURFACE HARDENED CUTTING EDGES



OPTION: CAST OR THROUGH HARDENED CUTTING EDGES
SURFACE HARDNESS - RC45 TO RC 52
CORE HARDNESS - RC43 MIN
MIN IMPACT VALUE-15 FT-LBS. CHARPY "V" NOTCH AT 65° F TO 85° F

PART NUMBER	L	H
39103-2	75	13
39103-3	99	17

PART NUMBERS MS39103-2 and MS39103-3

NOTES: CONTINUED

7. BOLTS FOR PART NUMBER MS39103-2 AND MS39103-3 SHALL BE 0.750 INCH IN DIAMETER AND CONFORM TO AMERICAN STANDARD B18.9, NO. 3 HD PLOW BOLTS.
8. HOLES FOR PART NUMBER MS39103-2 AND MS39103-3 SHALL BE FOR A 0.750 INCH DIAMETER BOLT IN ACCORDANCE WITH DRAWING 1 OF SAE STANDARD FOR COUNTERSUNK SQUARE HOLES FOR CUTTING EDGES AND END BITS J740b.
9. TOLERANCE ON DIMENSION 1.00/.625 FOR ALL CUTTING EDGES EXCEPT CASTINGS ± .025; FOR CAST EDGES + .093 - .025.

REVIEW ACTIVITIES:
USER ACTIVITIES: MC

APPROVED 12 FEB 1960 REVISED (1) 12 Sep 1972

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ME	TITLE	MILITARY STANDARD
Other Cust AIRFORCE-84	CUTTING EDGE, MOLDBOARD, DOZER	MS 39103
PROCUREMENT SPECIFICATIONS MIL-D-17076	SUPERSEDES:	SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:46Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MS 39103D - Cutting Edge, Moldboard, Dozer

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:46Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES P/

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH. DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

FOLD

-D—36,485-

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:46Z
Check the source to verify that this is the current version before use.