

FED SUP CLASS
4730

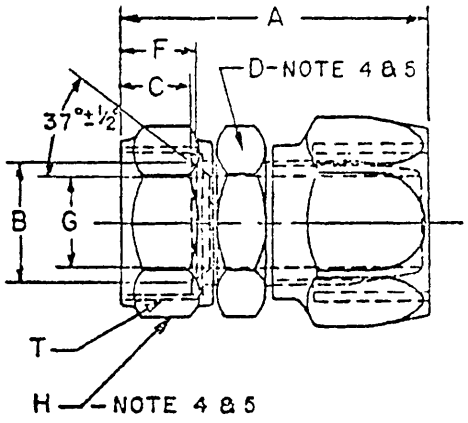



DASH NUMBERS (SEE NOTE 2)										HOSE I D	T THREAD SIZE NOM
SAE 100 R1 HOSE		SAE 100 R2 HOSE		SAE 100 R3 HOSE		SAE 100 R4 HOSE		SAE 100 R5 HOSE			
STEEL	BRASS	STEEL	BRASS	STEEL	BRASS	STEEL	BRASS	STEEL	BRASS		
10S	10B	20S	20B	30S	30B	40S	40B	50S	50B	3/16	7/16-20
11S	11B	21S	21B	31S	31B	41S	41B	51S	51B	1/4	7/16-20
12B	12B	22S	22B	32S	32B	42S	42B	52S	52B	1/4	1/2 -20
								53S	53B	5/16	9/16-18
13S	13B	23S	23B	33S	33B	43S	43B			3/8	9/16-18
								54S	54B	13/32	3/4 -16
14S	14B	24S	24B	34S	34B	44S	44B			1/2	3/4 -16
15S	15B	25S	25B	35S	35B	45S	45B	55S	55B	1/2	7/8 -14
								56S	56B	5/8	1 1/16-12
16S	16B	26S	26B	36S	36B	46S	46B			3/4	1 1/16-12
								57S	57B	7/8	1 5/16-12
17S	17B	27S	27B	37S	37B	47S	47B			1	1 5/16-12
								58S	58B	1 1/8	1 5/8 -12
18S	18B	28S	28B	38S	38B	48S	48B			1 1/4	1 5/8 -12
								59S	59B	1 3/8	1 7/8 -12
19S	19B	29S	29B	39S	39B	49S	49B			1 1/2	1 7/8 -12
								150S	150B	1 13/16	2 1/2 -12
100S	100B	120S	120B	130S	130B	140S	140B			2	2 1/2 -12

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the ORDNANCE CORPS of the ARMY and is mandatory for use by the Ordnance activity. All other military activities are required to consider this standard where suitable.

P.A. ARMY - ORD
Other Cust

TITLE
ADAPTER, STRAIGHT, TUBE TO HOSE - 37° FLARE, FEMALE, REUSABLE

MILITARY STANDARD
MS39156 (ORD

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES
CNGX 5

SHEET 1 OF 2

DD FORM 1426 672-1 (Line Item Continuation)

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

HOSE I D	T THREAD SIZE NOM	A MAX FOR USE ON 100 R1 100 R3 100 R4 100 R5 HOSE	A MAX FOR USE ON 100 R2 HOSE	B +.010 -.000	C MIN	D MIN	E MAX	F +.020 -.000	G MIN	H NOM
3/16	7/16-20	2 9/16	2 39/64	0.290	0.300	7/16	1	11/32	0.156	9/16
1/4	7/16-20	2 9/16	2 39/64	0.290	0.300	7/16	1	11/32	0.156	9/16
1/4	1/2 -20	2 5/8	2 45/64	0.355	0.331	1/2	1	3/8	0.156	5/8
5/16	9/16-18	2 7/8		0.435	0.333	9/16	1 3/16	3/8	0.260	11/16
3/8	9/16-18	2 7/8	3	0.435	0.333	9/16	1 3/16	3/8	0.260	11/16
13/32	3/4 -16	3 1/8		0.570	0.375	3/4	1 3/8	27/64	0.354	7/8
1/2	3/4 -16	3 1/8	3 15/64	0.570	0.375	3/4	1 3/8	27/64	0.354	7/8
1/2	7/8 -14	3 7/16	3 11/32	0.680	0.461	7/8	1 3/8	1/2	0.354	1 1/8
5/8	1 1/16-12	3 5/8		0.850	0.469	1 1/8	1 3/4	9/16	0.600	1 1/4
3/4	1 1/16-12	3 5/8	3 57/64	0.850	0.469	1 1/8	1 3/4	9/16	0.600	1 1/4
7/8	1 5/16-12	4 5/32		1.103	0.563	1 3/8	2 1/16	19/32	0.810	1 1/2
1	1 5/16-12	4 5/32	4 7/16	1.103	0.563	1 3/8	2 1/16	19/32	0.810	1 1/2
1 1/8	1 5/8 -12	4 23/32		1.410	0.563	1 11/16	2 5/8	5/8	1.016	2
1 1/4	1 5/8 -12	4 23/32	5 1/16	1.410	0.563	1 11/16	2 5/8	5/8	1.042	2
1 3/8	1 7/8 -12	4 13/16		1.625	0.661	2	2 15/16	47/64	1.250	2 1/4
1 1/2	1 7/8 -12	4 13/16	5 15/16	1.625	0.661	2	2 15/16	47/64	1.250	2 1/4
1 13/16	2 1/2 -12	5 1/2		2.240	0.844	2 5/8	3 1/2	15/16	1.745	2 7/8
2	2 1/2 -12	5 1/2	5 63/64	2.240	0.844	2 5/8	3 1/2	15/16	1.745	2 7/8

MATERIAL: STEEL, CARBON IN ACCORDANCE WITH SPECIFICATION QQ-S-633.
BRASS, HALF HARD IN ACCORDANCE WITH SPECIFICATION QQ-B-626 COMPOSITION 21 OR 22.

FINISH: BRASS: UNCOATED.
STEEL: CADMIUM PLATE IN ACCORDANCE WITH SPECIFICATION QQ-P-416, TYPE II CLASS 3.

NOTES:
1. PIPE THREAD SHALL BE NPTF IN ACCORDANCE WITH HANDBOOK H28.
2. ADAPTERS MUST FIT THE TYPE OF HOSE INDICATED IN THE DASH NUMBER COLUMN AND SHALL NOT BLOW OFF OR LEAK WHEN SUBJECTED TO THE PROOF PRESSURE SPECIFIED BY SAE FOR THE TYPE OF HOSE.
3. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER, EXAMPLE: MS39156-10S.
4. MIN AND MAX ACROSS FLATS DIMENSIONS SHALL BE COMMERCIAL TOLERANCE OF BAR OR EXTRUDED STOCK FROM WHICH THE PARTS ARE MADE. THE MINIMUM ACROSS CORNER DIMENSIONS SHALL NOT RESULT IN A SIDE FLAT LESS THAN 0.45 TIMES THE NOMINAL WIDTH ACROSS FLATS.
5. HEX DIMENSIONS SHALL FIT STANDARD WRENCH OPENINGS. WHEN "E" DIMENSION IS LARGER THAN "D" DIMENSION, ALLOWANCE SHALL BE MADE FOR WRENCH CLEARANCE.
6. ADAPTERS SHALL BE FREE FROM BURRS AND SHARP EDGES.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
8. THIS DOCUMENT SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.
9. DRAWING IS FOR ILLUSTRATION ONLY AND IS NOT INTENDED TO RESTRICT DESIGN.

APPROVED 9 MAR 1962 REVISED

P.A. ARMY-ORD Other Cust	TITLE ADAPTER, STRAIGHT, TUBE TO HOSE - 37° FLARE, FEMALE, REUSABLE	MILITARY STANDARD MS39156 (ORD)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: CNGX 3	SHEET 2 OF

DD FORM 1 SEP 67 672-1 (Limited coverage) Previous editions are obsolete.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the ORDNANCE CORPS Department of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23 17:47:2
Check the source to verify that this is the current version before use.