




FED. SUP CLASS
2320

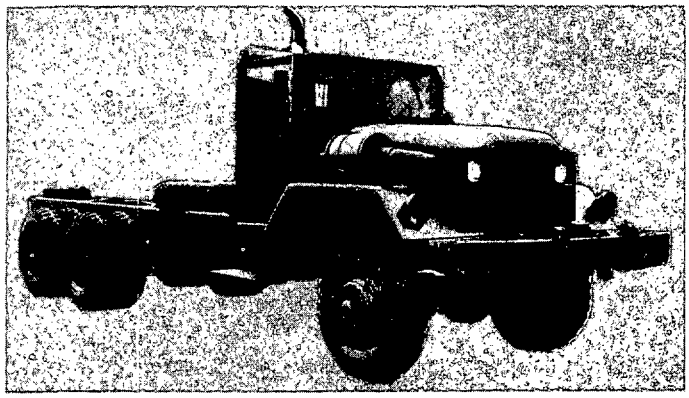

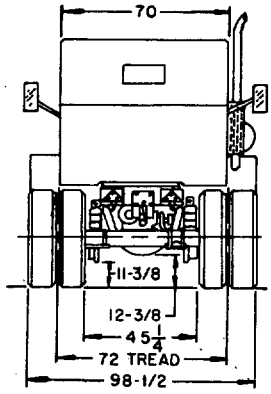

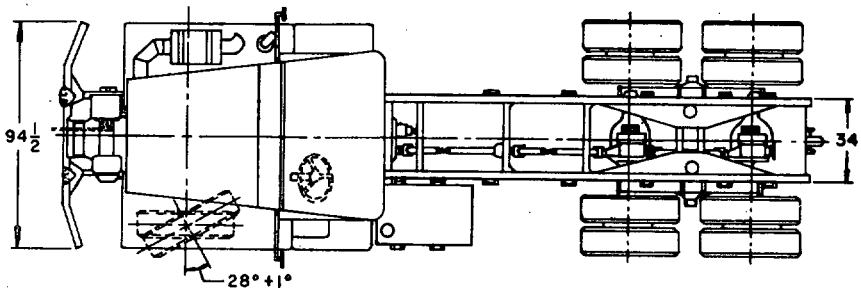

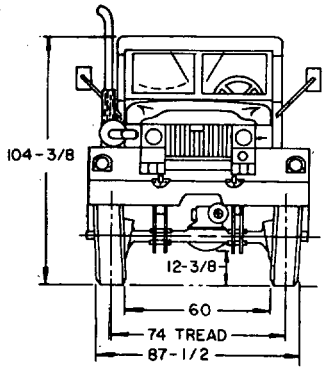

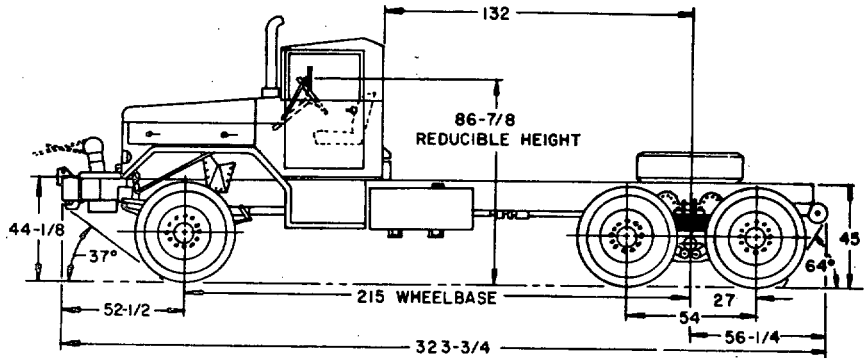

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 2805-A (EDITION 3). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

INACTIVE AFTER 21 OCTOBER 1974
FOR NEW DESIGN USE MIL-T-740

(M811A1)

(B) DENOTES CHANGES

MS PART NO.	REFERENCE DRAWING
MS 52102-1	8736529

P.A. ARMY-AT Other Cust AF-99	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK, 5 TON, 6 X 6, 215 INCH WHEELBASE, MILITARY DESIGN, M63A2C	MILITARY STANDARD MS 52102
PROCUREMENT SPECIFICATION MIL-T-740		SUPERSEDES:	SHEET 2 OF

APPROVED 26 DEC. 1968 REVISED (A) 21 OCT 74 (B) 29 JANUARY 1981

USER ACTIVITY: NAVY-MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:202
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS AND CAB, LESS PERSONNEL AND PAYLOAD.

FRONT AXLE	9200 LBS.
REAR AXLE	9400 LBS.
TOTAL	18600 LBS.

PAYLOAD:

CROSS COUNTRY	26100 LBS.
HIGHWAY	30100 LBS.

TOWED LOAD, MAXIMUM:

CROSS COUNTRY	15000 LBS.
HIGHWAY	30000 LBS.

MINIMUM TURNING RADIUS: OVER BUMPER, W/WINCH 46 FT. 8 INCHES

* **FORDING DEPTH:**

W/ KIT	78 INCHES
WO/ KIT	30 INCHES

ENGINE: MODEL LDS 465-1A ASSY. 10938250-1
POWER PLANT, INSTL. 10938275-1
SIX CYLINDERS, IN LINE
DISPLACEMENT, 478 CU. IN.
BORE 4.56, STROKE 4.87
COMPRESSION RATIO, 22 TO 1
FUEL, MULTIFUEL
GOVERNED SPEED, 2800 RPM
MAX. GROSS HP, 210 NET, 198 @ 2800 RPM
MAX. GROSS TORQUE, 450 FT/LBS
NET TORQUE, 440 FT/LBS @ 2000 RPM
COOLING SYSTEM CAPACITY, 38 QTS.
FAN, ENGINE COOLING, SIX BLADES 10889866
BELT, FAN AND GENERATOR 10889856
FUEL SYSTEM, INSTL. 10938398
EXHAUST SYSTEM, INSTL. 11593176
(B) CLUTCH ASSEMBLY 11664385
CLUTCH-DRIVEN MEMBER, ASSY. 8735503
PRESSURE PLATE ASSEMBLY 8735507

TRANSMISSION ASSEMBLY: 8333627
TYPE, SYNCHROMESH; NO. OF SPEEDS, 5 FWD. 1 REV.
FORWARD RATIOS; 7.31, 4.09, 2.41, 1.44, 1.00
REVERSE RATIO, 7.33

TRANSFER TRANSMISSION: INSTL. 10899367-2
TRANSFER CASE 10938322
GEAR RATIOS; HIGH, 1.068:1 LOW, 2.163:1
REVERSE; HIGH, 1.000:1 LOW, 2.024:1

FRONT SUSPENSION: INSTL. 10871256-1
FRONT AXLE 7346805
FRONT SPRINGS 7411110
SHOCK ABSORBERS 7409617

REAR SUSPENSION: INSTL. 10871257
REAR AXLE 8327216
REAR SPRINGS 8327139
TORQUE ROD ASSEMBLY 8728126

FRAME ASSEMBLY: 11611812
SIDE RAIL, 9 X 3 X 5/16
SECTION MODULUS, 11.26 IN.^{3}
CROSS MEMBERS, SEVEN
FRONT BUMPER AND LIFTING SHACKLES 10883120
REAR LIFTING SHACKLES 10883139

TIE DOWNS: SIXTEEN, W/WINCH 10883223

MIRROR ASSEMBLY:
MIRROR ASSEMBLY, R.H. 11611649-1
(B) MIRROR ASSEMBLY, L.H. 11611835-1

WHEELS: INCLUDING RING MS 53044-6
SIZE, 20 X 7.5, OFFSET 6-11/16
RING MS 53045-3

TIRES: 10 PLUS 1 SPARE MS 35388-23
SIZE, 12:00 X 20, 14 PLY
TREAD, NDMS

TUBES: MS 35392-16

GENERAL:

(B) CAB SUPPORT	INSTL.	11593192-3
CAB ASSY. (SOFT TOP)	INSTL.	10883174-1
(B) TRUCK FRONT END	INSTL.	11593303
STEERING	INSTL.	8758369
(B) RUNNING BOARDS, L.H.	INSTL.	10871471
BATTERY BOX	INSTL.	11608768-2
INSTRUMENT PANEL	INSTL.	10938210-16
TACHOMETER	INSTL.	10938366
THROTTLE LINKAGE	INSTL.	10938349-2
AIR CLEANER	INSTL.	10938336
PROPELLER SHAFT	INSTL.	10883532
(B) SPEEDOMETER	INSTL.	10883599

WINCH: INSTL. 10871486
CAPACITY, 20000 LBS.
WINCH, WITH LEVEL WIND 7411122

PINTLE: INSTL. 10883364
CAPACITY, 30000 LBS.
HIGHWAY MS 51117-1

BRAKE SERVICE: INTERNAL EXPANDING, AIR/HYDRAULIC 10938421
DRUM SIZE; FRONT, REAR 16-1/2 X 5-1/2
BRAKE; PARKING, INSTL. 11608801-1
DRUM SIZE; 14 X 3

ELECTRICAL: INSTL. 10938386-3
POTENTIAL; 24 VOLTS, ACCESS. 10938159-1
STARTING MOTOR 10911018-1
(B) GENERATOR, 25 AMPS 10950808 OR 7355736
BATTERIES, TWO, 12 VOLT, 6 TM MS 35000-4
REGULATOR MS 51356-1
B.O. MARKER LIGHTS, REAR 11614157
B.O. MARKER LIGHTS, FRONT 11614156
B.O. DRIVING LIGHTS MS 51318
(B) TRAILER COUPLING SOCKET 8376209

PERFORMANCE:
FUEL TANK CAPACITY, 66 GALLONS
CRUISING RANGE; HIGHWAY, 319 MILES
MAXIMUM SPEED, 53 MPH

ADDITIONAL EQUIPMENT AVAILABLE:

POWER PLANT HEATER KIT	10938375
PERSONNEL HEATER KIT	10932106
THERMAL BARRIER KIT	10938249
(B) A-FRAME KIT, DERRICK	8390117
AIR BRAKE KIT	8758174
FORDING KIT	11593175
CLOSURE ASSY. HARDTOP KIT	7354276
HOT WATER HEATER, PERSONNEL	10938450

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM:

(B) US ARMY TANK-AUTOMOTIVE MATERIEL READINESS COMMAND
ATTN: DRSTA-GSS
WARREN, MICHIGAN 48090

APPROVED 26 DEC. 1968 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE: CHASSIS, TRUCK, 5 TON, 6X6, 215 INCH WHEELBASE, MILITARY DESIGN, M63A2C	MILITARY STANDARD MS 52102
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.