
Form Approved
OMB No. 0704-0188

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-M-46728

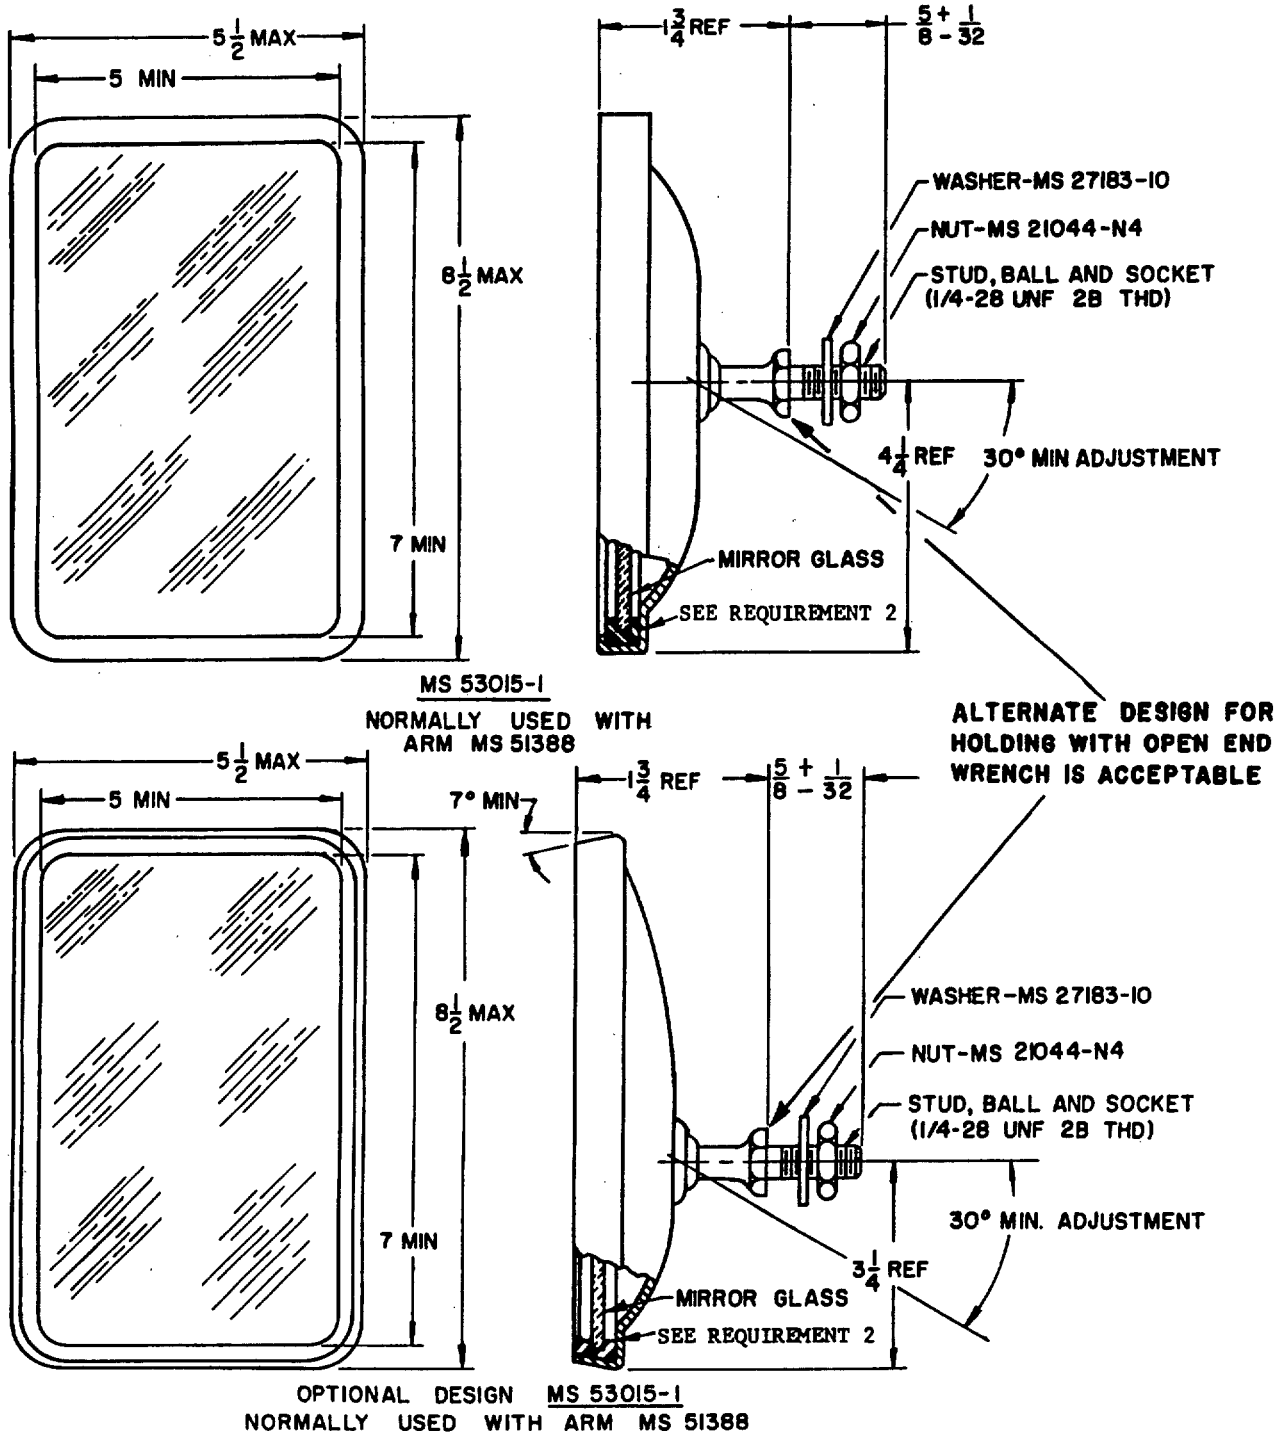


MS 53015-1
NORMALLY USED WITH ARM MS 51388

OPTIONAL DESIGN MS 53015-1
NORMALLY USED WITH ARM MS 51388

(H) DENOTES CHANGES


| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY- AT NAVY- YD<br>AIR FORCE- 99<br>REVIEW: AF-84; DLA-CS<br>USER: ARMY-ME, MI; NAVY-MC<br>PROJECT NUMBER: 2540-0364 | MILITARY SPECIFICATION SHEET<br>TITLE:<br>MIRROR ASSEMBLY, REARVIEW | SPECIFICATION SHEET NUMBER:<br>MS53015H<br>22 AUGUST 1989<br>SUPERSEDING:<br>MS53015G, 17 APRIL 1984<br>AMSC-N/A FSC- 2540 |
| DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited. | | Page 1 of 4 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:19Z
Check the source to verify that this is the current version before use.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-M-46728

Form Approved
OMB No. 0704-0188

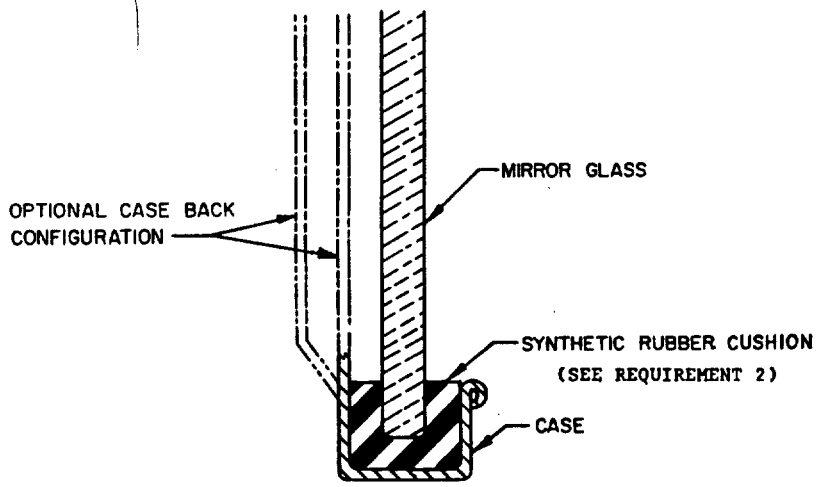


CROSS-SECTION VIEW OF MIRROR INSTALLATION

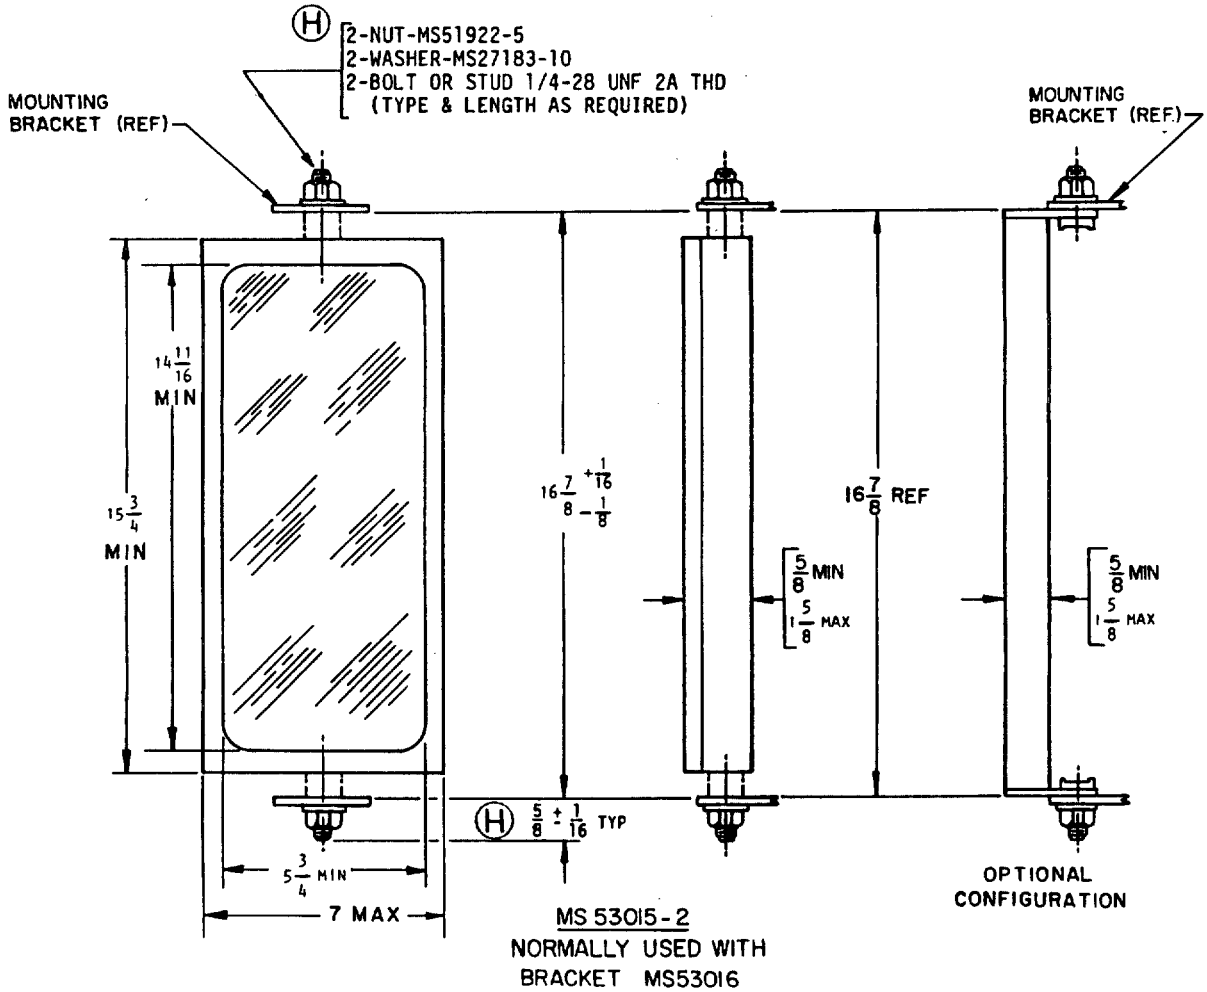


MS 53015-2
NORMALLY USED WITH BRACKET MS53016

OPTIONAL CONFIGURATION


| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY-AT NAVY-YD<br>AIR FORCE-99<br>REVIEW: AF-84; DLA-CS<br>USER: ARMY-ME, MI; NAVY-MC<br>PROJECT NUMBER: 2540-0364 | MILITARY SPECIFICATION SHEET<br>TITLE:<br>MIRROR ASSEMBLY, REARVIEW | SPECIFICATION SHEET NUMBER:<br>MS53015H<br>22 AUGUST 1989<br>SUPERSEDING:<br>MS53015G, 17 APRIL 1984<br>AMSC-N/A FSC-2540 |
| DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. | | Page 2 of 4 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:10Z
Check the source to verify that this is the current version before use.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-M-46728

Form Approved
OMB No. 0704-0188

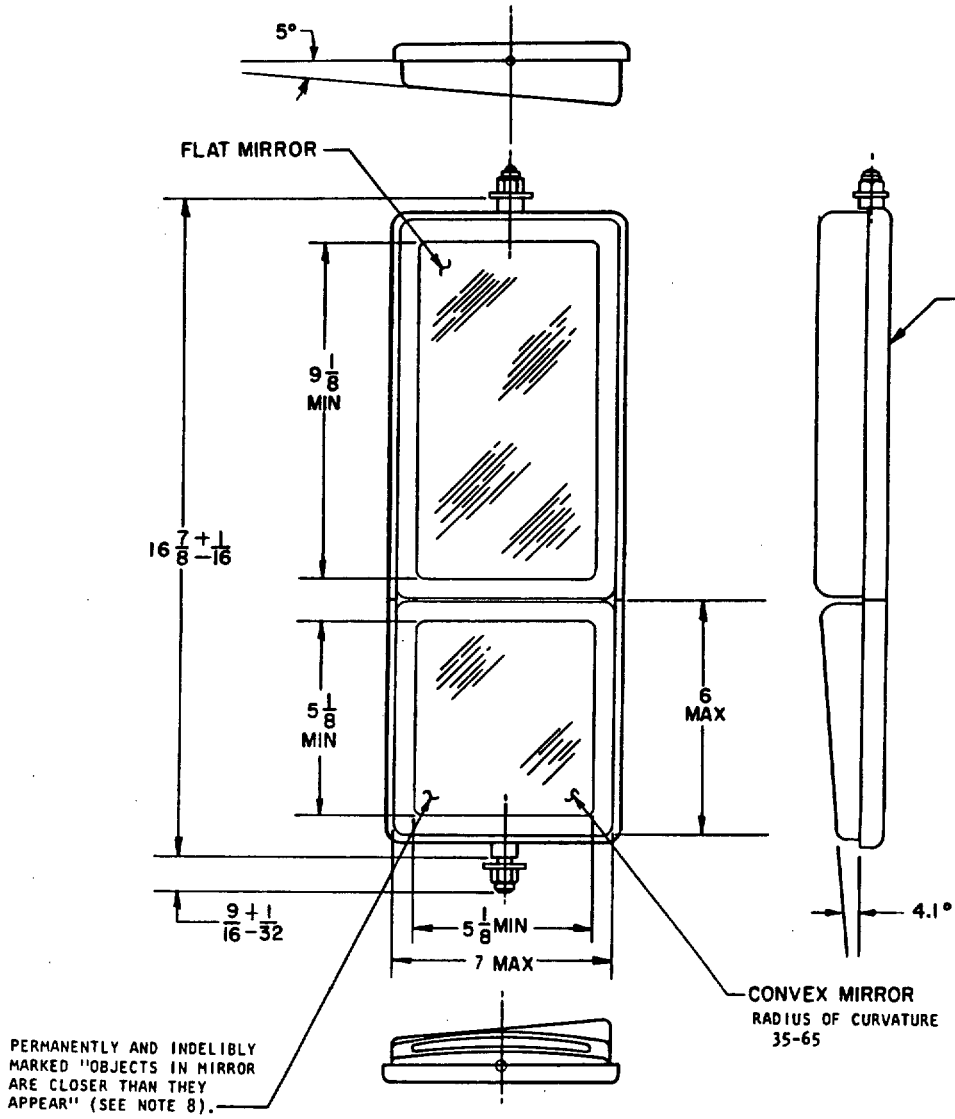


| | |
|---|---|
| MS53015-3 | RH SHOWN |
| MS53015-4 | LH OPPOSITE |

NORMALLY USED WITH BRACKET MS53016

ANGLE BETWEEN PLANE OF FLAT MIRROR AND CHORD PLANE OF CONVEX MIRROR AS SHOWN ABOVE:
5° IN PLAN VIEW
4.1° IN VERTICAL ELEVATION VIEW

RIGHT HAND MIRROR ASSEMBLY IS SHOWN. LEFT HAND MIRROR IS IDENTICAL EXCEPT OF OPPOSITE HAND WITH RESPECT TO VERTICAL AXIS.

COMBINATION MIRROR ASSEMBLY SEE REQUIREMENT NO.6.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY-AT NAVY-YD<br>AIR FORCE-99<br>REVIEW: AF-84; DLA-CS<br>USER: ARMY-ME, MI; NAVY-MC<br>PROJECT NUMBER: 2540-0364 | MILITARY SPECIFICATION SHEET<br>TITLE:<br>MIRROR ASSEMBLY, REARVIEW | SPECIFICATION SHEET NUMBER:<br>MS53015H<br>22 AUGUST 1989<br>SUPERSEDING:<br>MS53015G, 17 APRIL 1984<br>AMSC-N/A FSC-2540 |
| DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. | | Page 3 of 4 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:192
Check the source to verify that this is the current version before use.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-M-46728

This specification is approved for use by all Departments and Agencies of the Department of Defense.

REQUIREMENTS:

1. BALL, STUD AND SOCKET ASSEMBLY SHALL BE PROVIDED WITH MEANS OF ADJUSTING TENSION SUFFICIENTLY TO HOLD MIRROR IN FIXED POSITION.
2. SYNTHETIC RUBBER CUSHION, GRADE RS515 B-$C_1$-$F_1$, OF MIL-STD-417. METHOD OF CUSHION RETENTION OPTIONAL.
3. MANUFACTURER MAY SUPPLY SPACERS AS REQUIRED TO MEET THE DIMENSIONS BETWEEN MOUNTING EARS AS SHOWN.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS.
5. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
6. THE COMBINATION (PLANE AND CONVEX) MIRROR ASSEMBLY WILL BE CAPABLE OF BEING INDEPENDENTLY ADJUSTED.
7. MIRROR ASSEMBLY SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF MIL-STD-1180, REQUIREMENT NO. 111.
8. MARKING SHALL BE AT THE LOWER EDGE OF MIRROR'S REFLECTIVE SURFACE, IN LETTERS NOT LESS THAN 3/16 INCH NOR MORE THAN 1/4 INCH HIGH.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY-AT NAVY-YD<br>AIR FORCE-99<br>REVIEW: AF-84; DLA-CS<br>USER: ARMY-ME, MI; NAVY-MC<br>PROJECT NUMBER: 2540-0364 | MILITARY SPECIFICATION SHEET<br>TITLE:<br>MIRROR ASSEMBLY, REARVIEW | SPECIFICATION SHEET NUMBER:<br>MS53015H<br>22 AUGUST 1989<br>SUPERSEDING:<br>MS53015G, 17 APRIL 1984<br>AMSC-N/A FSC-2540 |



Source: https://assist.dla.mil - Downloaded: 2026-10-25T20:15Z
Check the source to verify that this is the current version before use.