

MS9195(ASG)

FED. SUP CLASS
4730

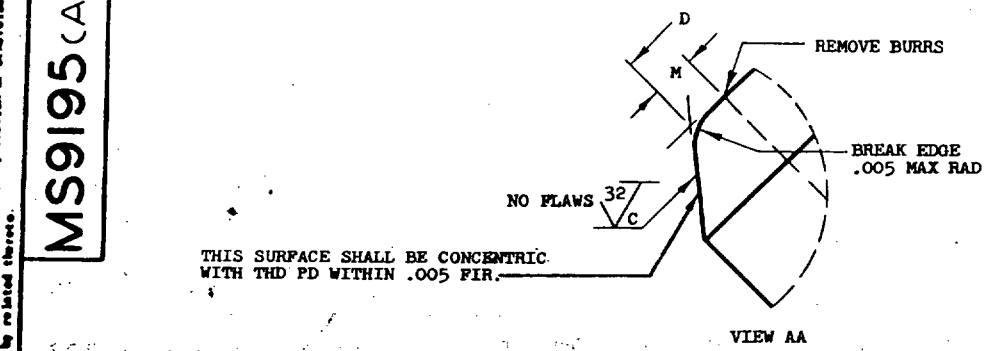

VIEW AA

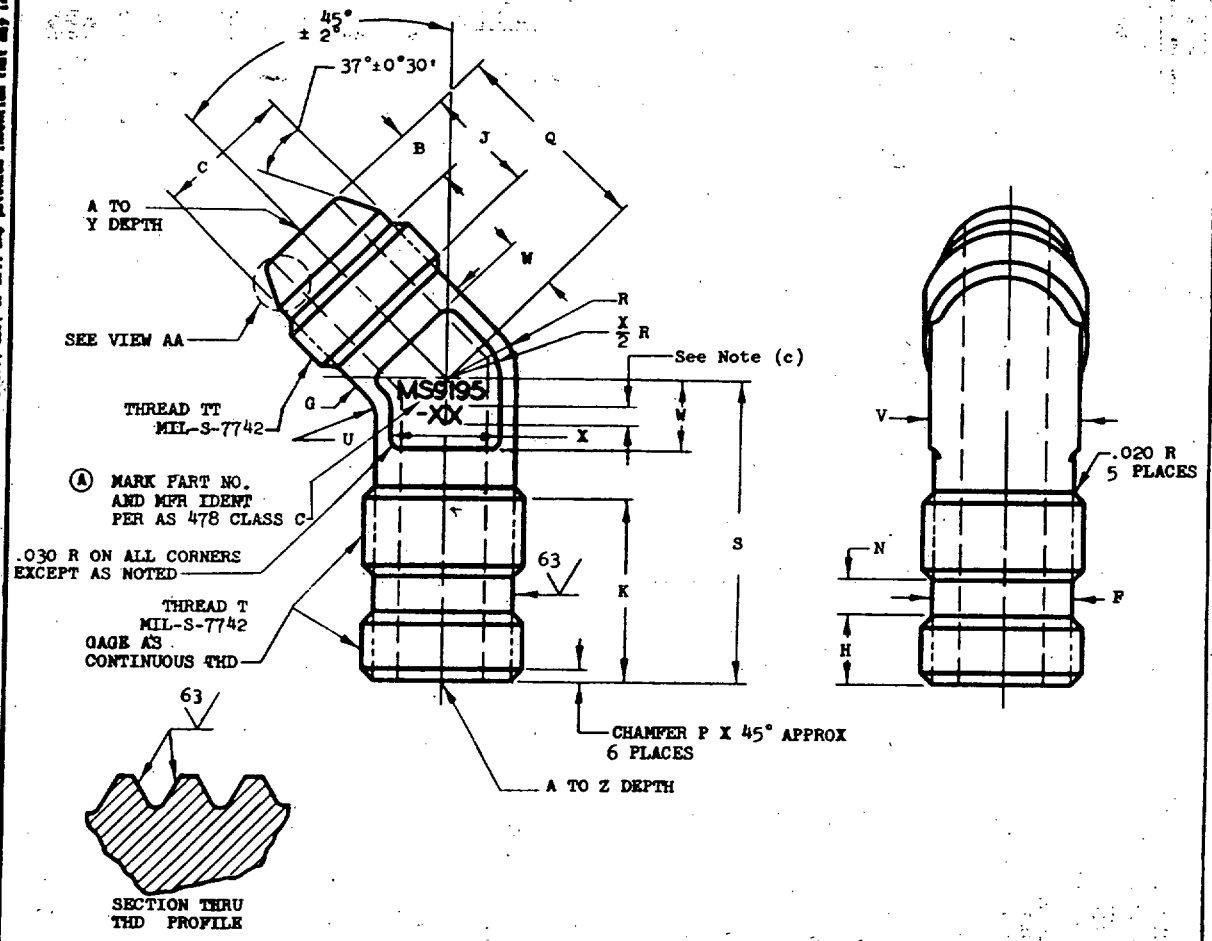

SECTION THRU
THD PROFILE

(a) DIAMETER F SHALL BE FREE OF THREAD MARKS.
(b) DIAMETER F SHALL BE CONCENTRIC WITH PD OF THREAD WITHIN .0025 FIR.
(c) .020-.040 FOR -02, -03, AND -04 SIZES; .040-.060 FOR -05 THRU -16 SIZES; .090-.150 FOR -18 & LARGER SIZES.
Ⓐ (d) ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .010 FIR. UNLESS OTHERWISE SPECIFIED.
Ⓐ (e) PARTING LINE MISMATCH .015 MAX.
Ⓐ (f) E MIN WALL THICKNESS BETWEEN FORGED SURFACE AND HOLE A.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 11 Apr 60 REVISED Ⓐ 11 May 62

CUSTODIAN	MILITARY STANDARD	MS9195(ASG)
USAF - AFSC Navy - Bulkeps	ELBOW, TUBE - AMS 5646, BOSS, 45°	SHEET 1 OF 2
PROCUREMENT SPECIFICATION NONE		

MD FORM 1 NOV 58 233

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 672-1 OCT 53

PROCUREMENT SPECIFICATION — NONE

SUPERSEDES: —

CUSTODIANS — Navy - BuWeps; USAF - AFSC

OTHER INT. — A - ; N - ; AF -

MILITARY STANDARD

ELBOW, TUBE - AMS 5646, BOSS, 45°

MS9195(ASG)

SHEET 2 OF 2

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENTIRE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

MS9195(ASG)

MATERIAL: CORROSION RESISTANT STEEL AMS 5646, FORGING.
CLEANING: FINISHED PARTS SHALL BE DEGREASED AND IMMERSED FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.
SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 MICROINCHES.

PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.015. DIMENSIONS ARE TO SHARP CORNERS UNLESS OTHERWISE SPECIFIED.

DO NOT USE UNASSIGNED PART NUMBERS. AS & AMS ARE SAE PUBLICATIONS

PART NO.	Ⓐ (f) E	NOM TUBE OD	THREAD T	THREAD TT SIZE	THREAD TT MAJOR DIA	THREAD TT PD	THREAD TT MINOR DIA MAX	A DIA	B +.015 -.000	C DIA +.000 -.010	D DIA ±.003	F DIA +.002 -.003 (a)(b)	G DIA
MS9195-02	.040	.125	.3125-24UNF-3A	.3125-24NS	.3023- .3095	.2797- .2824	.2584	.058- .065	.144	.245	.132	.250	.240
MS9195-03	.050	.188	.375 -24UNF-3A	.375-24NS	.3648- .3720	.3420- .3449	.3209	.121- .128	.144	.307	.195	.312	.300
MS9195-04	.050	.250	.4375-20UNF-3A	.4375-20NS	.4264- .4345	.3989- .4020	.3732	.168- .175	.160	.359	.242	.364	.350
MS9195-05	.050	.312	.500 -20UNF-3A	.500-20NS	.4889- .4970	.4613- .4645	.4357	.230- .237	.160	.421	.304	.426	.415
MS9195-06	.050	.375	.5625-18UNF-3A	.5625-18NS	.5508- .5595	.5200- .5234	.4913	.293- .301	.165	.476	.368	.481	.470
MS9195-07	.060	.438	.625 -18UNF-3A	.625-18NS	.6133- .6220	.5824- .5859	.5538	.355- .363	.165	.539	.430	.544	.535
MS9195-08	.080	.500	.750 -16UNF-3A	.750-16NS	.7376- .7470	.7026- .7064	.6703	.387- .395	.229	.654	.462	.660	.650
MS9195-09	.090	.562	.8125-16UN-3A	.8125-16NS	.8001- .8095	.7653- .7689	.7328	.434- .442	.229	.716	.509	.722	.710
MS9195-10	.090	.625	.875 -14UNF-3A	.875-14NS	.8617- .8720	.8215- .8256	.7844	.480- .488	.255	.767	.555	.773	.765
MS9195-11	.100	.688	1.000 -12UNF-3A	1.000-12NS	.9856- .9970	.9385- .9429	.8948	.542- .552	.304	.875	.619	.882	.870
MS9195-12	.100	.750	1.0625-12UN-3A	1.0625-12NS	1.0481-1.0595	1.0012-1.0054	.9573	.604- .614	.304	.938	.681	.945	.935
MS9195-14	.100	.875	1.1875-12UN-3A	1.1875-12NS	1.1731-1.1845	1.1261-1.1304	1.0823	.729- .739	.304	1.062	.806	1.070	1.055
MS9195-16	.120	1.000	1.3125-12UN-3A	1.3125-12NS	1.2981-1.3095	1.2511-1.2554	1.2073	.839- .851	.312	1.188	.918	1.195	1.185
MS9195-18	.140	1.125	1.500 -12UNF-3A	1.500-12NS	1.4856-1.4970	1.4381-1.4429	1.3948	.948- .960	.312	1.375	1.027	1.382	1.365
MS9195-20	.150	1.250	1.625-12UN-3A	1.625-12NS	1.6106-1.6220	1.5635-1.5679	1.5198	1.073-1.086	.363	1.500	1.153	1.507	1.495
MS9195-24	.160	1.500	1.875 -12UN-3A	1.875-12NS	1.8606-1.8720	1.8134-1.8179	1.7698	1.307-1.320	.374	1.750	1.387	1.756	1.745
MS9195-28	.210	1.750	2.250 -12UN-3A	2.250-12NS	2.2356-2.2470	2.1884-2.1929	2.1448	1.542-1.557	.447	2.125	1.652	2.131	2.120
MS9195-32	.210	2.000	2.500 -12UN-3A	2.500-12NS	2.4856-2.4970	2.4429-2.4383	2.3948	1.776-1.791	.457	2.375	1.886	2.381	2.370

PART NO.	H ±.010	J ±.010	K ±.010	M MIN	N +.010 -.000	P	Q ±.010	R RADIUS	S ±.010	U RADIUS	V	W	X	Y ±.010	Z ±.010	APPROX WEIGHT LBS/EA
MS9195-02	.208	.317	.682	.030	.125	.020-.050	.608	.120	1.000	.062	.250	.160	.200	.639	1.032	.024
MS9195-03	.208	.346	.682	.030	.131	.020-.050	.608	.150	1.000	.062	.312	.160	.220	.639	1.032	.033
MS9195-04	.250	.398	.748	.030	.140	.030-.060	.717	.175	1.094	.062	.375	.200	.270	.748	1.122	.047
MS9195-05	.250	.398	.748	.030	.140	.030-.060	.717	.205	1.094	.062	.438	.200	.330	.748	1.122	.059
MS9195-06	.278	.398	.813	.030	.156	.040-.070	.779	.235	1.219	.094	.500	.250	.330	.826	1.250	.074
MS9195-07	.278	.398	.813	.030	.172	.040-.070	.779	.267	1.219	.094	.562	.250	.330	.826	1.250	.085
MS9195-08	.312	.489	.903	.030	.187	.040-.070	.945	.325	1.375	.094	.688	.310	.430	1.023	1.406	.163
MS9195-09	.312	.489	.903	.030	.203	.040-.070	.945	.355	1.375	.094	.750	.310	.440	1.023	1.406	.187
MS9195-10	.357	.585	1.018	.030	.219	.050-.080	1.083	.382	1.531	.094	.812	.350	.500	1.177	1.625	.238
MS9195-11	.417	.663	1.122	.030	.234	.050-.080	1.255	.435	1.734	.094	.938	.420	.500	1.364	1.859	.356
MS9195-12	.417	.663	1.122	.030	.234	.050-.080	1.255	.467	1.734	.094	1.000	.420	.500	1.364	1.859	.385
MS9195-14	.417	.710	1.122	.030	.234	.050-.080	1.440	.527	1.734	.125	1.125	.420	.500	1.534	1.859	.467
MS9195-16	.417	.720	1.122	.030	.234	.050-.080	1.450	.592	1.734	.125	1.250	.420	.500	1.544	1.859	.549
MS9195-18	.417	.767	1.122	.030	.234	.050-.080	1.574	.682	1.750	.125	1.438	.450	.600	1.699	1.921	.778
MS9195-20	.417	.767	1.122	.030	.234	.050-.080	1.574	.750	1.750	.125	1.625	.450	.600	1.699	1.921	.871
MS9195-24	.417	.889	1.122	.030	.234	.050-.080	1.762	.872	1.750	.125	1.812	.450	.600	1.855	1.921	1.115
MS9195-28	.417	1.017	1.205	.044	.234	.050-.080	1.949	1.062	1.969	.188	2.188	.500	.660	2.199	2.188	1.912
MS9195-32	.417	1.142	1.320	.044	.234	.050-.080	2.199	1.188	2.203	.250	2.438	.500	.750	2.480	2.422	2.497

FED. SUP CLASS 4730

APPROVED 11 APR 60 REVISED Ⓐ 11 May 62

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.