NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-15160/37
1 February 1961

PERFORMANCE SPECIFICATION SHEET

FUSES, STYLE F37

*This specification is approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.*

1. SCOPE

1.1 This specification covers the detailed requirements for fuses style F37.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herien:

SPECIFICATION

MILITARY
MIL-F-15160 - Fuses; Instrument, Power, and Telephone.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Fuses shall be in accordance with Specification MIL-F-15160, and as specified herein. The electrical and physical requirements shall be as shown in figure 1 and in tables I, II and III.

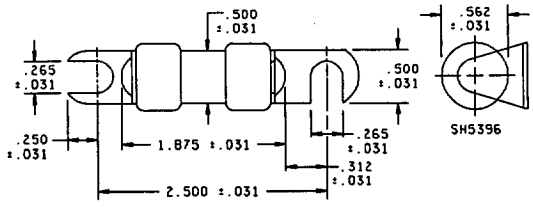



Figure 1. *Dimension in inches for Style F37 fuse.*

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:45Z
Check the source to verify that this is the current version before use.

TABLE I. *Physical requirements*

| (Nonindicating fuse) | |
|---|---|
| Case material | Fibre |
| Lug material<br>Terminal strength (Ferrules) | Brass<br>5-pound-inch torque |

TABLE II *Electrical requirements*

| Voltage rating | 125 volts, max | | |
|---|---|---|---|
| Overload blowing | Percent nominal rating | Normal blowing time | Time lag blowing time |
| | 135<br>300 | 0–1 hour | 0–1 hour<br>30 secs min |
| Short circuit | 10,000 amperes at rated voltage dc | | |

TABLE III *Style, characteristics, current and voltage ratings*

| Type designation | | | |
|---|---|---|---|
| Style | Characteristic | Voltage | Current |
| F37 | A | 125V | 20A |
| F37 | A | 125V | 25A |
| F37 | A | 125V | 30A |
| F37 | B | 125V | 20A |
| F37 | B | 125V | 25A |
| F37 | B | 125V | 30A |

## 4. QUALITY ASSURANCE PROVISIONS

**4.1 Sampling and inspection.** Sampling and inspection shall be in accordance with Specification MIL–F–15160

**4.2 Qualification.** Qualification specimens required.

(a) 24 samples maximum current rating of each voltage and design

(b) 24 samples minimum current rating of each voltage and design

## 5. PREPARATION FOR DELIVERY

**5.1** Preparation for delivery shall be in accordance with Specification MIL–F–15160.

**5.1.1** The standard unit package is 5 pieces.

## 6. NOTES

**6.1** The notes specified in Specification MIL–F–15160 are applicable to this specification.

**6.2** Ordering data required by 6 2 of Specification MIL–F–15160 shall be included in all procurement documents

**Notice.** When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

**Custodians:**

**Army—Signal Corps**
**Navy—SHIPS**
**Air Force—DAY**

**Preparing activity:**

**Navy—Ships**
**(Project 5920–0063)**



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:45Z
Check the source to verify that this is the current version before use.