
INCH-POUND
MIL-F-15160/50A
29 October 1990
SUPERSEDING
MIL-F-15160/50
1 February 1961

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F50

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160

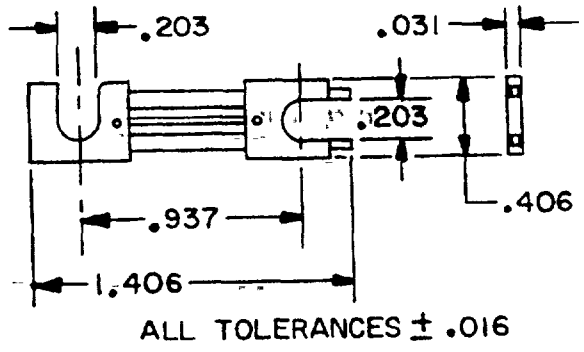

INCHES	MM
0 016	0 41
0.031	0 79
0.203	5 16
0 406	10.31
0 937	23.80
1 406	35 71

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for information purposes only and are based on 1 inch = 25 4 mm

FIGURE 1. *Style F50, characteristic A*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1 *Design and contruction* See figure 1.
Physical
Material.
Body – Plastic sheet
Terminal – Copper
Finish – Natural or tin plated
Terminal strength – MIL-STD-202, method 211, test condition E, 2 pound-inch torque between ferrules and fuse body.

Electrical
Current rating – See table I
Voltage rating – See table I
Current carrying capacity – 100 percent normal rating
Characteristic – See table I
Overload interrupt.
Characteristic A within 1 hour at 135 percent of rated current
Characteristic A within 60 seconds at 200 percent of rated current
Short circuit interrupt 20 amperes at 90 volts dc.

2. *Type designation:* Type designation shall be as specified in table I.

3. *Qualification.* Required.

TABLE I *Type designation.*

Style	Characteristic	Voltage	Current rating
F50	A	90	1/2A
F50	A	90	1 1/3A
F50	A	90	2A

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be:

a 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.

PACKAGING:

Unit packaging The standard unit pack shall be 10 pieces

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity.
Navy – SH
(Project 5920-0447-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.