
INCH-POUND
MIL-F-15160/51A
29 October 1990
SUPERSEDING
MIL-F-15160/51
1 February 1961

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F51

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160.

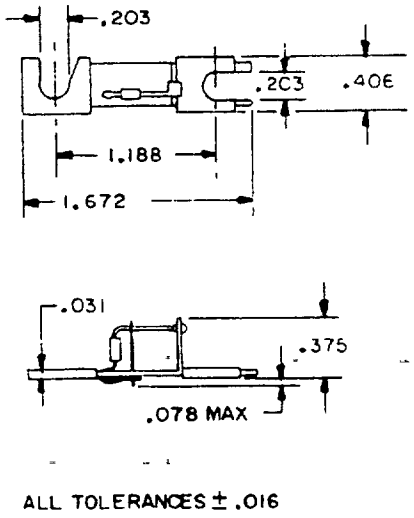

INCHES	MM
0 031	0 79
0.078	1 98
0 203	5 16
0.375	9 53
0 406	10.31
1.188	30 17
1.672	42 47

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for information purposes only and are based on 1 inch = 25 4 mm

FIGURE 1 *Style F51, characteristic A*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1.
Physical.
Material:
Body – Plastic sheet
Terminal – Copper
Finish – Natural or tin plated
Alarm springs – May be of nickel silver
Terminal strength – MIL-STD-202, method 211, 2 pound pull.

Electrical:
Current rating – See table II
Voltage rating – See table II
Current carrying capacity – 100 percent normal rating
Characteristic – See table II
Overload interrupt – See table I
Short circuit interrupt – 20 amperes at 90 volts dc.

2. *Type designation* Type designation shall be as specified in table I

3 *Qualification.* Required

TABLE I. *Overload interrupt*

Fuse current rating	Percent nominal rating	Normal blowing time
50	150	0–1.5 min
1.33	150	0–1 5 min
2.00	150	0–3 min

TABLE II *Type designation*

Style	Characteristic	Voltage	Current rating
F51	A	90	1/2A
F51	A	90	1 1/3A
F51	A	90	2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be:

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD.
Air Force – 17, 99
DSA – ES

User activities
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity
Navy – SH
(Project 5920-0447-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:47Z
Check the source to verify that this is the current version before use.