
INCH-POUND
MIL-F-15160/61C
29 October 1990
SUPERSEDING
MIL-F-15160/61B
20 October 1978

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F61

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160.

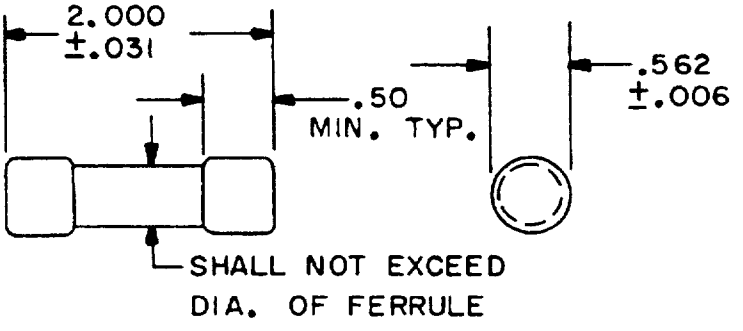

INCHES	MM
0.006	0.15
0.031	0.79
0.50	12.70
0.562	14.27
2.000	50.80

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1.00 inch = 25.4 mm

FIGURE 1 *Style F61, characteristic C*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1 *Design and construction* See figure 1

Physical

Material

Case – Glass melamine
Ferrule – Brass, copper, bronze, or copper alloy
Finish – Nickel or bright alloy plate, silver plated when specified
Terminal strength – MIL-STD-202, method 211, test condition E, 5 pound-inch torque between ferrules and fuse body.

Electrical

Current rating – See table I
Current carrying capacity – 110 percent of rated current
Voltage rating – See table I
Characteristic – Characteristic C only
Overload interrupt – Within 1 hour at 135 percent of rated current; and within 2 minutes at 200 percent
Short circuit interrupt – 200,000A at 500 Vac (symmetrical), 150,000A at 500 Vdc
Shock – MIL-STD-202, method 207, HI shock
Vibration – MIL-STD-202, method 204, test condition A (except 5g, 500 Hz)

2. *Type designation* Type designation shall be as specified in table I.

3. *Qualification* Required

TABLE I *Type designation* [1]

Style	Characteristic	Voltage	Current
F61	C	500	1A
F61	C	500	3A
F61	C	500	6A
F61	C	500	10A
F61	C	500	15A
F61	C	500	20A
F61	C	500	25A
F61	C	500	30A

[1]For silver plated terminals, the designator "S" is added after the current rating

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:48Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspections. The number of qualification samples required shall be

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design

NOTE. If labels are used, 5 additional samples of any rating are required.

Sample size. The number of group III samples shall be twelve samples each of the maximum and minimum current ratings. The samples shall be divided as shown in table II.

TABLE II. *Short circuit tests*

Number of samples	Short circuit current	Test voltage
3	5,000A	500 Vac[1]
3	200,000A	500 Vac[1]
3	5,000A	500 Vdc
3	150,000A	500 Vdc

[1]A 600 volt ac test voltage may be used

INSPECTION ROUTINE:

AC short circuit test AC short circuit tests shall be performed at the currents shown in table II at not less than 500 volts, single phase, and not greater than 20 percent power factor, lagging. The current shall be applied within plus or minus 10 degrees of the zero point of the voltage wave

DC short circuit test. DC short circuit test shall be performed at the currents shown in table II at not less than 500 volts The rate of rise shall be between 25,000,000 and 30,000,000 amperes per second.

Cross-reference For applicable cross-reference see table III The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:48Z
Check the source to verify that this is the current version before use.

TABLE III *Cross-reference*

Superseding No	Superseded numbers for CAGE				
	81349	96906	71400	71424	72076
F61C500V1A	F61H1R00C	MS15250-1	KLC 1	A5Y1-11	GSCL-1
F61C500V3A	F61H3R00C	MS15250-3	KLC 3	A5Y3-11	GSCL-3
F61C500V6A	F61H6R00C	MS15250-6	KLC 6	A5Y6-11	GSCL-6
F61C500V10A	F61H10R0C	MS15250-10	KLC 10	A5Y10-11	GSCL-10
F61C500V15A	F61H15R0C	MS15250-15	KLC 15	A5Y15-11	GSCL-15
F61C500V20A	F61H20R0C	MS15250-20	KLC 20	A5Y20-11	GSCL-20
F61C500V25A	F61H25R0C	MS15250-25	KLC 25	A5Y25-11	GSCL-25
F61C500V30A	F61H30R0C	MS15250-30	KLC 30	A5Y30-11	GSCL-30

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity.
Navy – SH
(Project 5920-0447-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:48Z
Check the source to verify that this is the current version before use.